GARMIN

Embraer Prodigy® Flight Deck 300

Cockpit Reference Guide

Embraer Phenom 300

FLIGHT INSTRUMENTS
ENGINE & AIRFRAME SYSTEMS
NAV/COM/TRANSPONDER/AUDIO PANEL
AUTOMATIC FLIGHT CONTROL SYSTEM
GPS NAVIGATION
FLIGHT PLANNING
PROCEDURES
HAZARD AVOIDANCE
ADDITIONAL FEATURES
ABNORMAL OPERATION
ANNUNCIATIONS & ALERTS
APPENDIX
INDEX

Copyright © 2008-2010, 2012 Garmin Ltd. or its subsidiaries. All rights reserved.

This manual reflects the operation of System Software version 0734.54 or later for the Embraer Phenom 300. Some differences in operation may be observed when comparing the information in this manual to earlier or later software versions.

Garmin International, Inc., 1200 East 151st Street, Olathe, Kansas 66062, U.S.A.
Tel: 913/397.8200 Fax: 913/397.8282

Garmin AT, Inc., 2345 Turner Road SE, Salem, OR 97302, U.S.A.
Tel: 503/391.3411 Fax 503/364.2138

Garmin (Europe) Ltd, Liberty House, Bulls Copse Road, Hounsdown Business Park, Southampton, SO40 9RB, U.K.
Tel: 44/0870.8501241 Fax: 44/0870.8501251

Garmin Corporation, No. 68, Jangshu 2nd Road, Shijr, Taipei County, Taiwan
Tel: 886/02.2642.9199 Fax: 886/02.2642.9099

For after-hours emergency, aircraft on ground (AOG) technical support for Garmin panel mount and integrated avionics systems, please contact Garmin's AOG Hotline at 913.397.0836.

Web Site Address: www.garmin.com

Except as expressly provided herein, no part of this manual may be reproduced, copied, transmitted, disseminated, downloaded or stored in any storage medium, for any purpose without the express written permission of Garmin. Garmin hereby grants permission to download a single copy of this manual and of any revision to this manual onto a hard drive or other electronic storage medium to be viewed for personal use, provided that such electronic or printed copy of this manual or revision must contain the complete text of this copyright notice and provided further that any unauthorized commercial distribution of this manual or any revision hereto is strictly prohibited.

Prodigy® is a registered trademark of Embraer-Empresa Brasileira de Aeronautica S.A.

Garmin® is a registered trademark of Garmin Ltd. or its subsidiaries. WATCH®, FliteCharts®, and SafeTaxi® are trademarks of Garmin Ltd. or its subsidiaries. These trademarks may not be used without the express permission of Garmin.

NavData® is a registered trademark of Jeppesen, Inc.; Honeywell® and Bendix/King® are registered trademarks of Honeywell International, Inc.; CO Guardian is a trademark of CO Guardian, Inc.

SiriusXM Weather and SiriusXM Satellite Radio are provided by SiriusXM Satellite Radio, Inc.

AC-U-KWIK® is a registered trademark of Penton Business Media Inc.

AOPA Membership Publications, Inc. and its related organizations (hereinafter collectively "AOPA") expressly disclaim all warranties, with respect to the AOPA information included in this data, express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. The information is provided "as is" and AOPA does not warrant or make any representations regarding its accuracy, reliability, or otherwise. Under no circumstances including negligence, shall AOPA be liable for any incidental, special or consequential damages that result from the use or inability to use the software or related documentation, even if AOPA or an AOPA authorized representative has been advised of the possibility of such damages. User agrees not to sue AOPA and, to the maximum extent allowed by law, to release and hold harmless AOPA from any causes of action, claims or losses related to any actual or alleged inaccuracies in the information. Some jurisdictions do not allow the limitation or exclusion of implied warranties or liability for incidental or consequential damages so the above limitations or exclusions may not apply to you.

March, 2012 190-00761-02 Rev. A Printed in the U.S.A.

WARNING: *Navigation and terrain separation must NOT be predicated upon the use of the terrain avoidance feature. The terrain avoidance feature is NOT intended to be used as a primary reference for terrain avoidance and does not relieve the pilot from the responsibility of being aware of surroundings during flight. The terrain avoidance feature is only to be used as an aid for terrain avoidance. Terrain data is obtained from third party sources. Garmin is not able to independently verify the accuracy of the terrain data.*

WARNING: *The displayed minimum safe altitudes (MSAs) are only advisory in nature and should not be relied upon as the sole source of obstacle and terrain avoidance information. Always refer to current aeronautical charts for appropriate minimum clearance altitudes.*

WARNING: *The altitude calculated by the GPS receivers is geometric height above Mean Sea Level and could vary significantly from the altitude displayed by pressure altimeters, such as the GDC 74B Air Data Computer, or other altimeters in the aircraft. GPS altitude should never be used for vertical navigation. Always use pressure altitude displayed by the PFD or other pressure altimeters in aircraft.*

WARNING: *Do not use outdated database information. Databases used in the system must be updated regularly in order to ensure that the information remains current. Pilots using any outdated database do so entirely at their own risk.*

WARNING: *Do not use basemap (land and water data) information for primary navigation. Basemap data is intended only to supplement other approved navigation data sources and should be considered as an aid to enhance situational awareness.*

WARNING: *Traffic information shown on system displays is provided as an aid in visually acquiring traffic. Pilots must maneuver the aircraft based only upon ATC guidance or positive visual acquisition of conflicting traffic.*

WARNING: *Do not use datalink weather products (e.g., SiriusXM Weather, GFDS World Wide Weather, or FIS-B) for hazardous weather penetration. Weather information provided by these products is aged by up to several minutes and may not depict actual weather conditions as they currently appear.*

WARNING: *NEXRAD weather data is to be used for long-range planning purposes only. Due to inherent delays in data transmission and the relative age of the data, NEXRAD weather data should not be used for short-range weather avoidance.*

WARNING: *The Prodigy® Integrated Flight Deck, as installed in the Embraer Phenom 300 aircraft, has a very high degree of functional integrity. However, the pilot must recognize that providing monitoring and/or self-test capability for all conceivable system failures is not practical. Although unlikely, it may be possible for erroneous operation to occur without a fault indication shown by the system. It is thus the responsibility of the pilot to detect such an occurrence by means of cross-checking with all redundant or correlated information available in the cockpit.*

WARNING: *For safety reasons, system operational procedures must be learned on the ground.*

WARNING: *The United States government operates the Global Positioning System and is solely responsible for its accuracy and maintenance. The GPS system is subject to changes which could affect the accuracy and performance of all GPS equipment. Portions of the system utilize GPS as a precision electronic NAVigation AID (NAVAID). Therefore, as with all NAVAIDs, information presented by the system can be misused or misinterpreted and, therefore, become unsafe.*

WARNING: *To reduce the risk of unsafe operation, carefully review and understand all aspects of the Prodigy® Pilot's Guide documentation and the Embraer Phenom 300 Airplane Flight Manual. Thoroughly practice basic operation prior to actual use. During flight operations, carefully compare indications from the system to all available navigation sources, including the information from other NAVAIDs, visual sightings, charts, etc. For safety purposes, always resolve any discrepancies before continuing navigation.*

WARNING: *The illustrations in this guide are only examples. Never use the system to attempt to penetrate a thunderstorm. Both the FAA Advisory Circular, Subject: Thunderstorms, and the Aeronautical Information Manual (AIM) recommend avoiding "by at least 20 miles any thunderstorm identified as severe or giving an intense radar echo."*

WARNING: *Lamp(s) inside this product may contain mercury (HG) and must be recycled or disposed of according to local, state, or federal laws. For more information, refer to our website at www.garmin.com/aboutGarmin/environment/disposal.jsp.*

WARNING: *Because of variation in the earth's magnetic field, operating the system within the following areas could result in loss of reliable attitude and heading indications. North of 72° North latitude at all longitudes. South of 70° South latitude at all longitudes. North of 65° North latitude between longitude 75° W and 120° W. (Northern Canada). North of 70° North latitude between longitude 70° W and 128° W. (Northern Canada). North of 70° North latitude between longitude 85° E and 114° E. (Northern Russia). South of 55° South latitude between longitude 120° E and 165° E. (Region south of Australia and New Zealand).*

WARNING: *Do not use GPS to navigate to any active waypoint identified as a 'NON WGS84 WPT' by a system message. 'NON WGS84 WPT' waypoints are derived from an unknown map reference datum that may be incompatible with the map reference datum used by GPS (known as WGS84) and may be positioned in error as displayed.*

CAUTION: *The PFD and MFD displays use a lens coated with a special anti-reflective coating that is very sensitive to skin oils, waxes, and abrasive cleaners. CLEANERS CONTAINING AMMONIA WILL HARM THE ANTI-REFLECTIVE COATING. It is very important to clean the lens using a clean, lint-free cloth and an eyeglass lens cleaner that is specified as safe for anti-reflective coatings.*

CAUTION: *The system does not contain any user-serviceable parts. Repairs should only be made by an authorized Garmin service center. Unauthorized repairs or modifications could void both the warranty and the pilot's authority to operate this device under FAA/FCC regulations.*

NOTE: *All visual depictions contained within this document, including screen images of the panel and displays, are subject to change and may not reflect the most current system and databases. Depictions of equipment may differ slightly from the actual equipment.*

NOTE: *This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

NOTE: *The data contained in the terrain and obstacle databases comes from government agencies. Garmin accurately processes and cross-validates the data, but cannot guarantee the accuracy and completeness of the data.*

NOTE: *This product, its packaging, and its components contain chemicals known to the State of California to cause cancer, birth defects, or reproductive harm. This notice is being provided in accordance with California's Proposition 65. If you have any questions or would like additional information, please refer to our web site at www.garmin.com/prop65.*

NOTE: *Interference from GPS repeaters operating inside nearby hangars can cause an intermittent loss of attitude and heading displays while the aircraft is on the ground. Moving the aircraft more than 100 yards away from the source of the interference should alleviate the condition.*

NOTE: *Use of polarized eyewear may cause the flight displays to appear dim or blank.*

NOTE: *The purpose of this Cockpit Reference Guide is to provide the pilot a resource with which to find operating instructions on the major features of the Prodigy® system more easily. It is not intended to be a comprehensive operating guide. Complete operating procedures for the system are found in the Prodigy® Flight Deck 300 Pilot's Guide.*

Part Number	Change Summary
190-00761-00	Initial release
190-00761-01	Added SMS texting Updated database update procedures in the Appendix Added other GDU 11.12 parameters
190-0761-02	Updated CAS messages Updated SiriusXM Satellite Radio audio mute procedure Added Pilot Profiles Updated Database Update procedures Added AC-U-KWIK Airport Directory capability Updated GFDS registration procedure Added Inset Map WX LGND Softkey Added other GDU 12.11 parameters

Revision	Date of Revision	Affected Pages	Description
A	March, 2012	All	Production release

Blank Page

FLIGHT INSTRUMENTS 1
- **Selecting the Altimeter Barometric Pressure Setting** 1
- **Selecting Standard Barometric Pressure** 1
- **Change Altimeter Barometric Pressure Setting Units** 1
- **Synchronizing the Altimeter Barometric Pressure Settings** 1
- **Synchronize CDI** 1
- **Change Navigation Sources** 2
- **Enable/Disable OBS Mode While Navigating with GPS** 2
- **Generic Timer** 2
- **Configure Vspeed Bugs Individually** 2
- **Turn Vspeed Bugs On or Off by Category** 3
- **Set Barometric/Radar Altimeter (Optional) Minimum Descent Altitude** 3
- **Displaying Wind Data** 3

ENGINE & AIRFRAME SYSTEMS 5
- **Synoptics** 11

NAV/COM/TRANSPONDER/AUDIO PANEL 21
- **Enter or Change Flight ID** 21
- **ADF Tuning (Optional)** 21
- **DME Tuning** 21
- **Enter a Transponder Code** 22
- **Select Transponder Mode** 22
- **Selecting a COM Radio** 22
- **Selecting a NAV Radio** 23
- **NAV/COM Tuning** 23
- **Intercom** 23
- **Passenger Address (PA) System** 24
- **Clearance Recorder and Player** 24

AUTOMATIC FLIGHT CONTROL SYSTEM 25
- **Flight Director Activation** 25
- **Vertical Modes** 26
- **Lateral Modes** 27

GPS NAVIGATION 29
- **Direct-to Navigation** 29
- **Activate a Stored Flight Plan** 30
- **Activate a Flight Plan Leg** 30
- **Stop Navigating a Flight Plan** 31
- **Vertical Navigation (VNAV)** 31

FLIGHT PLANNING 33
- **Weight Planning** 33
- **Trip Planning** 33
- **Create a User Waypoint Defined by Latitude & Longitude** 35
- **Create a User Waypoint Defined by Radials from Other Waypoints** 36
- **Create a User Waypoint Defined by a Radial & Distance from Another Waypoint** 38
- **Delete a User Waypoint** 39
- **Create a Flight Plan** 40
- **Import a Flight Plan from an SD Card** 41
- **Insert a Waypoint in the Active Flight Plan** 41
- **Enter an Airway in a Flight Plan** 42
- **Invert An Active Flight Plan** 43
- **Remove a Departure, Arrival, Approach, or Airway from a Flight Plan** 43
- **Store a Flight Plan** 44
- **Edit a Stored Flight Plan** 44
- **Delete a Waypoint from the Flight Plan** 44
- **Invert and Activate a Stored Flight Plan** 45
- **Copy a Flight Plan** 45
- **Delete a Flight Plan** 45
- **Graphical Flight Plan Creation** 46
- **Export a Flight Plan to an SD Card** 46

PROCEDURES 47
- **Load and Activate a Departure Procedure** 47
- **Activate A Departure Leg** 47
- **Load An Arrival Procedure** 47
- **Activate An Arrival Leg** 48
- **Load and/or Activate an Approach Procedure** 48
- **Activate An Approach in the Active Flight Plan** 49
- **Activate a Vector to Final Approach Fix** 49
- **Activate A Missed Approach in the Active Flight Plan** 50

HAZARD AVOIDANCE 51
- **Customizing the Hazard Displays on the Navigation Map** 51
- **SiriusXM Weather (Subscription Optional)** 51
- **Traffic Information Service (TIS)** 54
- **Traffic Collision Avoidance System (TCAS II) (Optional)** 55
- **Terrain Awareness & Warning System** 57
- **Airborne Color Weather Radar** 61

ADDITIONAL FEATURES 65
- **Synthetic Vision (Optional)** 65
- **Terminal Procedure Charts** 67

Airport Directory 69
Satellite Telephone and Data Link Services 69
System Data Logging (Optional) 85
SiriusXM Satellite Radio Entertainment (Subscription Optional) 87
Electronic Checklists (Optional) 89
Pilot Profiles 91

ABNORMAL OPERATION 95
Engine 95
Cabin pressurization 95
Flaps 96
Trim 97
Reversionary Mode 97
Abnormal COM Operation 97
Audio Panel Fail-safe Operation 98
Hazard Displays with Loss of GPS Position 98
Unusual Attitudes 98
Dead Reckoning 99

ANNUNCIATIONS & ALERTS 103
CAS Messages 103
Comparator Annunciations 109
Reversionary Sensor Annunciations 110
TAWS-A Alerts 111
TAWS-B Alerts 114
TCAS II Alerts and Annunciations 116
Other Prodigy® Aural Alerts 118
Flight Plan Import/Export Messages 119
Pilot Profile Import/Export Messages 120
MFD & PFD Message Advisories 121
Database Message Advisories 122
GMA 1347D Message Advisories 125
GIA 63W Message Advisories 126
GSD 41 Message Advisories 129
GEA 71 Message Advisories 129
GTX 33 Message Advisories 130
GRS 77 Message Advisories 131
GMU 44 Message Advisories 132
GSR 56 Message Advisories 132
GDL 59 Message Advisories 133
GDL 69A Message Advisories 133
GWX 68 Alert Messages 134

GDC 74B Message Advisories 134
GMC 715 Message Advisories 135
Miscellaneous Message Advisories 136

APPENDIX 141
PFD Softkey Map 141
MFD Softkey Map 151
Loading Updated Databases 154

INDEX Index-1

FLIGHT INSTRUMENTS

SELECTING THE ALTIMETER BAROMETRIC PRESSURE SETTING

Turn the **BARO** Knob to select the desired setting.

SELECTING STANDARD BAROMETRIC PRESSURE

Press the **BARO** Knob.

CHANGE ALTIMETER BAROMETRIC PRESSURE SETTING UNITS

1) Press the **PFD** Softkey to display the second-level softkeys.
2) Press the **ALT UNIT** Softkey.
3) Press the **IN** Softkey to display the barometric pressure setting in inches of mercury (in Hg).

   Or:

   Press the **HPA** Softkey to display the barometric pressure setting in hectopascals.
4) Press the **BACK** Softkey to return to the top-level softkeys.

SYNCHRONIZING THE ALTIMETER BAROMETRIC PRESSURE SETTINGS

1) Select the AUX-SYSTEM SETUP Page on the MFD.
2) Press the **FMS** Knob to activate the cursor.
3) Turn the large **FMS** Knob to highlight BARO in the SYNCHRONIZATION Window.
4) Turn the small **FMS** Knob clockwise to ON or counterclockwise to OFF.

SYNCHRONIZE CDI

1) Select the AUX-SYSTEM SETUP Page on the MFD.
2) Press the **FMS** Knob to activate the cursor.
3) Turn the large **FMS** Knob to highlight CDI in SYNCHRONIZATION Window.
4) Turn the small **FMS** Knob clockwise to ON or counterclockwise to OFF.

CHANGE NAVIGATION SOURCES

1) Press the **CDI** Softkey to change from GPS to VOR1 or LOC1. This places the light blue tuning box over the NAV1 standby frequency in the upper left corner of the PFD.
2) Press the **CDI** Softkey again to change from VOR1 or LOC1 to VOR2 or LOC2. This places the light blue tuning box over the NAV2 standby frequency.
3) Press the **CDI** Softkey a third time to return to GPS.

ENABLE/DISABLE OBS MODE WHILE NAVIGATING WITH GPS

1) Press the **OBS** Softkey to select OBS Mode.
2) Turn the **CRS** Knob to select the desired course to/from the waypoint. Press the **CRS** Knob to slew the CDI Course Pointer to a course bearing directly to the waypoint.
3) Press the **OBS** Softkey again to disable OBS Mode.

GENERIC TIMER

1) Press the **TMR/REF** Softkey, then turn the large **FMS** Knob to select the time field (hh/mm/ss). Turn the **FMS** Knobs to set the desired time, then press the **ENT** Key. The UP/DOWN field is now highlighted.
2) Turn the small **FMS** Knob to display the UP/DOWN window. Turn the **FMS** Knob to select 'UP' or 'DOWN', then press the **ENT** Key. 'START?' is now highlighted.
3) Press the **ENT** Key to START, STOP, or RESET the timer (if the timer is counting DOWN, it will start counting UP after reaching zero). Press the **CLR** Key or the **TMR/REF** Softkey to remove the window.

CONFIGURE VSPEED BUGS INDIVIDUALLY

1) Press the **TMR/REF** Softkey.
2) Turn the large **FMS** Knob to highlight the desired Vspeed.
3) Use the small **FMS** Knob to change the Vspeed in 1-kt increments (when a speed has been changed from a default value, an asterisk appears next to the speed).

4) Press the **ENT** Key or turn the large **FMS** Knob to highlight the ON/OFF field.
5) Turn the small **FMS** Knob clockwise to ON or counterclockwise to OFF.
6) To remove the window, press the **CLR** Key or the **TMR/REF** Softkey.

TURN VSPEED BUGS ON OR OFF BY CATEGORY

1) Press the **TMR/REF** Softkey.
2) Press the **MENU** Key.
3) Turn the **FMS** Knob to highlight the desired option.
4) Press the **ENT** Key. Press the **TMR/REF** Softkey to remove the window.

SET BAROMETRIC/RADAR ALTIMETER (OPTIONAL) MINIMUM DESCENT ALTITUDE

1) Press the **TMR/REF** Softkey.
2) Turn the large **FMS** Knob to highlight the OFF/BARO/RAD ALT field to the right of 'MINIMUMS'.
3) Turn the small **FMS** Knob clockwise to select BARO or RAD ALT.
4) Press the **ENT** Key.
5) Use the small **FMS** Knob to enter the desired altitude.
6) Press the **ENT** Key.
7) To remove the window, press the **CLR** Key or the **TMR/REF** Softkey.

DISPLAYING WIND DATA

1) Press the **PFD** Softkey.
2) Press the **WIND** Softkey to display wind data below the Selected Heading.
3) Press one of the **OPTN** softkeys to change how wind data is displayed.
4) To remove the Wind Data Window, press the **OFF** Softkey.

Blank Page

ENGINE & AIRFRAME SYSTEMS

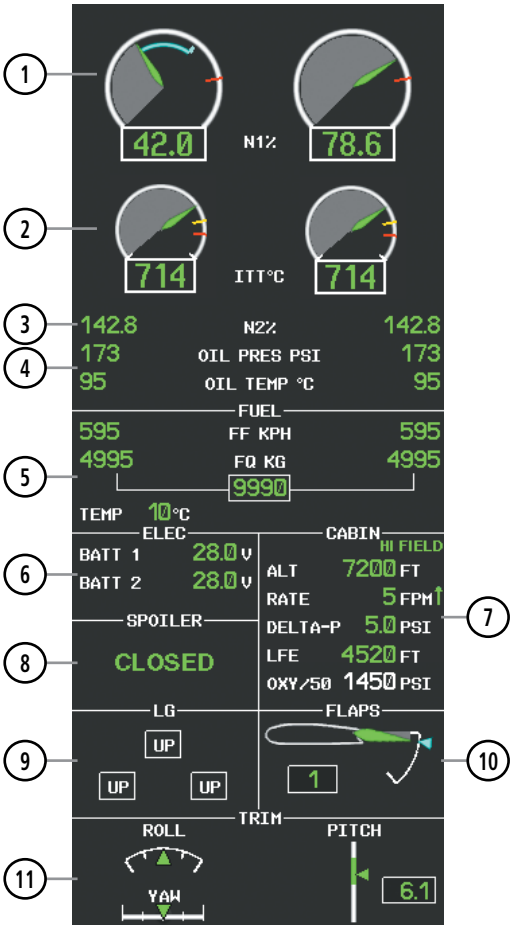

EIS Display (Normal Mode)

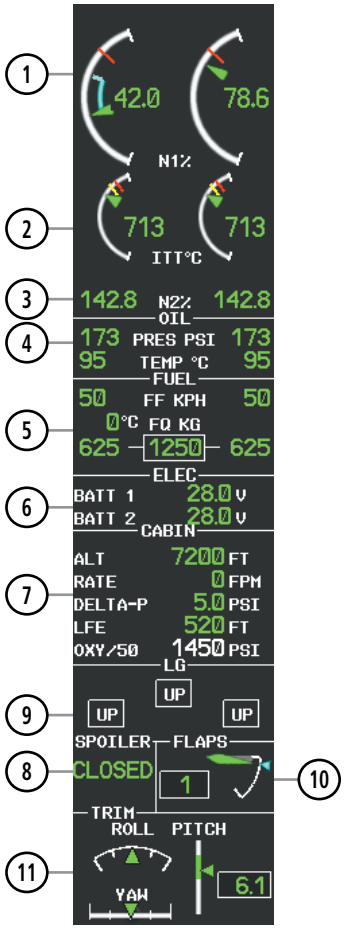

EIS Display (Reversionary Mode)

1. *Engine Fan Rotation Speed*
2. *Interstage Turbine Temperature (ITT)*
3. *Engine High Pressure Compressor Rotation Speed*
4. *Oil Pressure and Temperature*
5. *Fuel Display*
6. *Battery Voltmeter*
7. *Pressurization Display*
8. *Spoiler Status*
9. *Landing Gear Status*
10. *Flap Indicator*
11. *Trim Indicator*

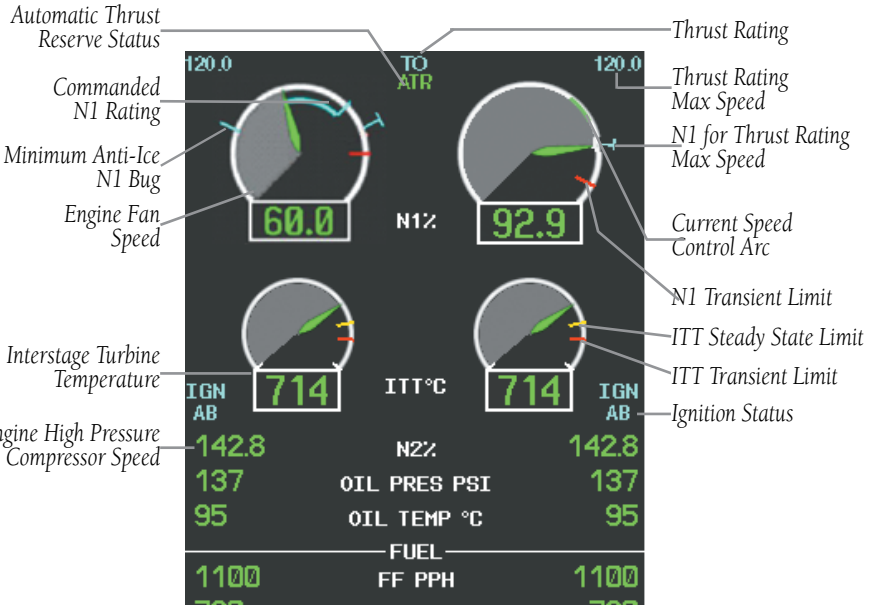

Engine Indications

Thrust Rating

Indication	Thrust Rating
CRZ	Cruise
CLB	Climb
CON	Continuous
TO	Takeoff
GA	Go Around

Thrust Rating Indications

Selecting a thrust rating:

1) Select the **SYSTEM** Softkey.
2) Select the **ENG SET** Softkey
3) To choose the continuous thrust rating, select the **CON** Softkey,

   Or:

   To choose the maximum climb thrust rating, select the **CLB** Softkey.
4) Select the **BACK** Softkey to return to the previous softkey level.

Automatic Thrust Reserve

Indication*	Description
ATR	ATR enabled in both engines
ATR	ATR armed in both engines, but inactive
TO - RSV	ATR activated in at least one engine in Take Off mode
GA - RSV	ATR activated in at least one engine in Go-Around Mode

** When no indication is shown, ATR has not been enabled or armed in both engines.*

Automatic Thrust Reserve (ATR) Status

Disabling/enabling Automatic Thrust Reserve (ATR):

1) Select the **SYSTEM** Softkey.
2) Select the **ENG SET** Softkey to display the Takeoff Data Set Window.
3) To disable ATR, select the **ATR OFF** Softkey;

   Or:

   To enable ATR, select the **ATR ON** Softkey.
4) If desired, change the OAT while the Takeoff Data Set Window is displayed.
5) To confirm the selected takeoff settings and close the Takeoff Data Set Window, select the **ACCEPT** Softkey,

   Or:

   To cancel the operation, select the **BACK** Softkey.

Takeoff Data Set Window

Takeoff Data Set Window

Setting the Outside Air Temperature (OAT):

1) Select the **SYSTEM** Softkey.
2) Select the **ENG SET** Softkey to display the Takeoff Data Set Window.
3) To adjust the temperature in 1 °C increments, use the **OAT↑** and **OAT↓** softkeys.
4) If desired, change the ATR status while the Takeoff Data Set Window is displayed.
5) To confirm the selected takeoff settings and close the Takeoff Data Set Window, select the **ACCEPT** Softkey,

   Or:

   To cancel the operation, select the **BACK** Softkey.

Fuel and Electrical Indications

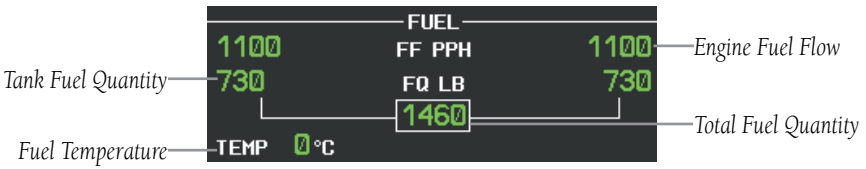

Fuel Display



Electrical Display

Cabin Pressurization

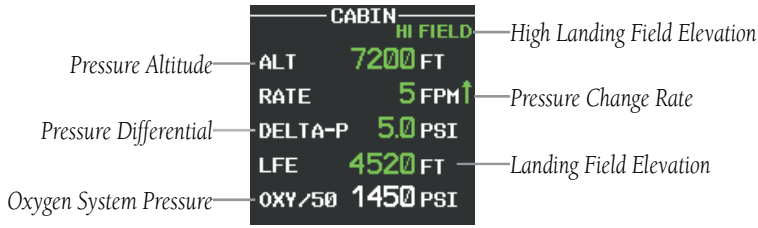

Cabin Pressure Display

Setting the displayed landing field elevation:

1) Select the **SYSTEM** Softkey.
2) Select the **LFE** Softkey.
3) Select the **FMS LFE** Softkey to set the LFE to the value for the destination airport in the current flight plan.

   Or:

   Use the **±500** and **±50 FT** softkeys to set the desired elevation.
4) To confirm the new LFE value, select the **ACCEPT** Softkey.

Spoiler and Landing Gear

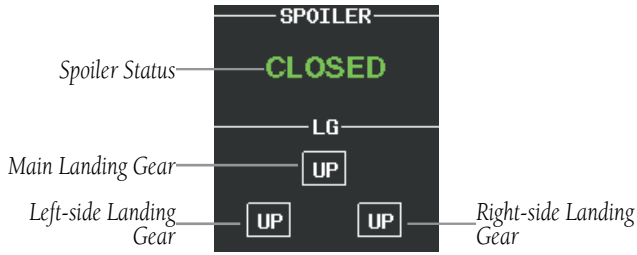

Spoiler and Landing Gear Indications

Indication	Description
	Landing Gear Down
	Landing Gear Up
	Landing Gear Transitioning (Normal)
	Landing Gear Locked Down
	Landing Gear Locked Up
	Landing Gear Transitioning (Abnormal)

Landing Gear Position Indications

Indication	Description
	Invalid information
SPDBRK	Spoilers not in takeoff configuration
FAIL	Spoiler failed to deploy
CLOSED	Spoiler retracted
GND SPLR	Ground spoiler deployed
SPDBRK	Speedbrakes deployed

Spoiler Indications

Flaps and Trim

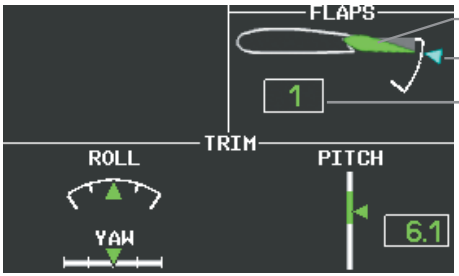

Flap and Trim Indications

SYNOPTICS

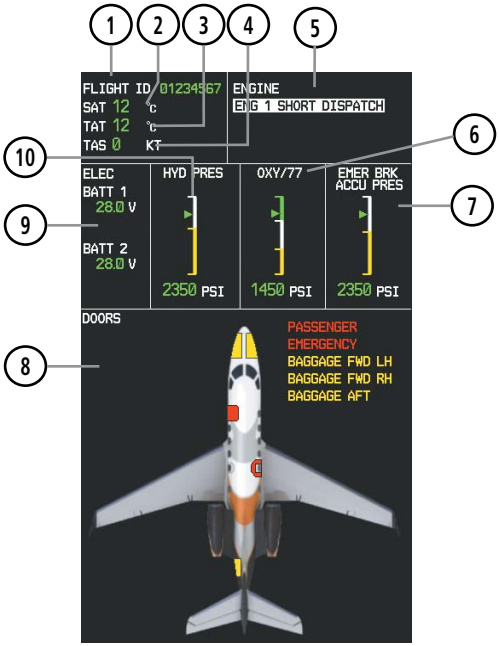

1. *Flight ID*
2. *Static Air Temperature (SAT)*
3. *Total Air Temperature (TAT)*
4. *True Airspeed (TAS)*
5. *Engine Dispatch Message Box*
6. *Oxygen*
7. *Emergency Brake Accumulator Pressure*
8. *Door Status*
9. *Electrical Status*
10. *Hydraulic Pressure*

System Status Synoptics Page

Environmental Control System (ECS)

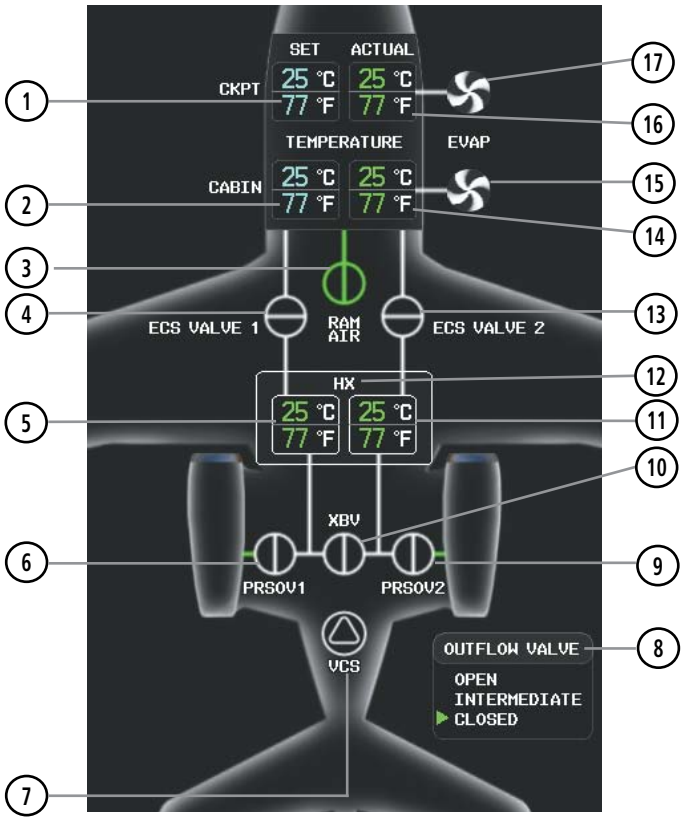

1. *Cockpit Temperature Setting*
2. *Cabin Temperature Setting*
3. *Ram Air Valve (RAV)*
4. *Environmental Control System Valve (ECS) 1*
5. *Cockpit Duct Temperature Setting*
6. *Pressure Regulating Shutoff Valve (PRSOV) 1*
7. *Vapor Cycle System (VCS)*
8. *Outflow Valve (OFV) Status**
9. *Pressure Regulating Shutoff Valve (PRSOV) 2*
10. *Crossbleed Valve Status (XBV)*
11. *Cabin Duct Temperature Setting*
12. *Heat Exchanger Cooling Pack Circuit*
13. *Environmental Control System Valve (ECS) 2*
14. *Actual Cabin Temperature*
15. *Cabin Evaporator Fan*
16. *Actual Cockpit Temperature*
17. *Cockpit Evaporator Fan*

Environmental Control System Synoptics Page

Unit	Icons and Descriptions
Fan	On / Off
Heat Exchanger	On / Off
Vapor Cycle System	On / Off
ECS Valve Ram Air Valve	Open with flow / Open, no flow / Closed
Pressure Regulating Shutoff Valve (PRSOV) Crossbleed Valve (XBV)	Open with flow / Open, no flow / Closed

Environmental Control System Unit Status Indications

Electrical

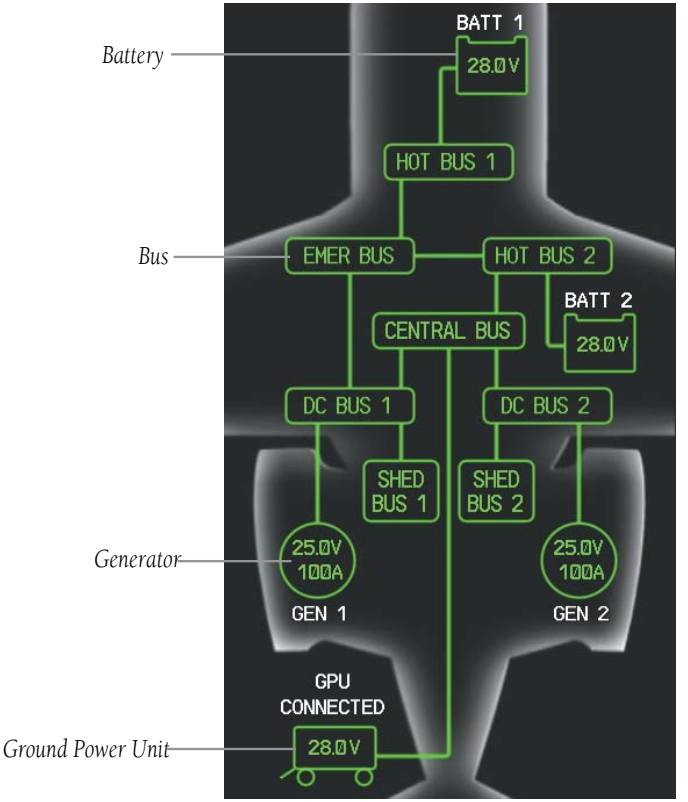

Electrical Synoptics Page

Unit	Icons and Descriptions
Generator	N2>52% Bus off N2<52%
Bus	 DC BUS 1 On DC BUS 1 Bus off
Hot Bus	HOT BUS 1 Normal HOT BUS 1 Abnormal
Battery	Normal Abnormal

Electrical System Unit Status Indications

Fuel

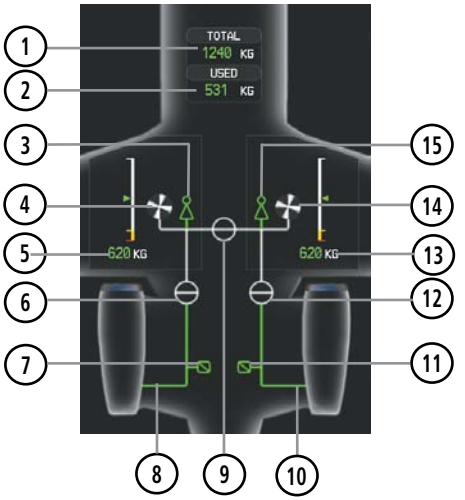

1. *Total Fuel*
2. *Fuel Used*
3. *Left Feed Ejector*
4. *Left DC Pump*
5. *Left Tank Fuel Quantity*
6. *Fuel 1 SOV*
7. *LH Pressure Switch*
8. *Left Engine Feed Line*
9. *Fuel Transfer SOV*
10. *Right Engine Feed Line*
11. *RH Pressure Switch*
12. *Fuel 2 SOV*
13. *Right Tank Fuel Quantity*
14. *Right DC Pump*
15. *Right Feed Ejector*

Fuel Synoptics Page

Unit	Icons and Descriptions
Fuel Line	Operating Not operating
Feed Ejector	Operating Not operating
Fuel Pressure Switch	Operating Not operating
Valve	Open with flow Open, no flow In transit Closed
DC Pump	Operating Not operating
Fuel Transfer Valve	Open with flow Open, no flow In transit Closed

Fuel System Unit Status Indications

Ice Protection System

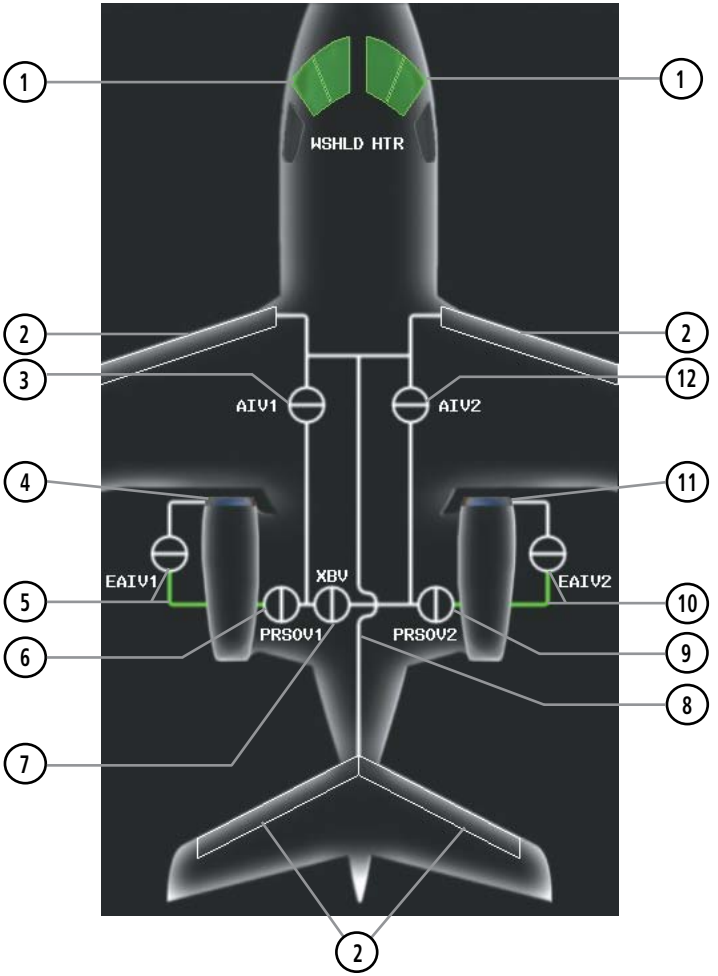

1. *Windshield Heaters*
2. *Boot Lines and Valves*
3. *Anti Ice Valve (AIV) 1*
4. *Bleed Duct and Skin 1*
5. *Engine Anti Ice Valve (EAIV) 1 Valve and Bleed Line*
6. *Pressure Regulating Shut-Off Valve 1 (PRSOV 1)*
7. *Crossbleed Valve*
8. *Ice Protection Bleed Duct*
9. *Pressure Regulating Shut-Off Valve 2 (PRSOV 2)*
10. *Engine Anti Ice Valve (EAIV) 2 Valve and Bleed Line*
11. *Bleed Duct and Skin 2*
12. *Anti Ice Valve (AIV) 2*

Ice Protection Synoptics Page

Unit	Icons and Descriptions
Anti Ice Line	Operating Not operating
Crossbleed Valve (XBV) Pressure Regulating Shutoff Valve (PRSOV)	Open with flow Open, no flow Closed
Anti Ice Valve (AIV) Engine Anti Ice Valve (EAIV)	Open with flow Open, no flow Closed

Ice Protection System Unit Status Indications

Blank Page

NAV/COM/TRANSPONDER/AUDIO PANEL

ENTER OR CHANGE FLIGHT ID

1) Press the **TMR/REF** Softkey, then turn the large **FMS** Knob to highlight the Flight ID field.
2) Turn the small **FMS** Knob to enter the first character.
3) Turn the large **FMS** Knob to select the next field.
4) Turn the small **FMS** Knob to enter the next desired character.
5) Repeat steps 3 and 4 until the desired Flight ID is entered.
6) Press the **ENT** Key to update the Flight ID.

ADF TUNING (OPTIONAL)

1) Press the **ADF/DME** Softkey.
2) Turn the small **FMS** Knob to enter the first digit of the desired ADF frequency.
3) Turn the large **FMS** Knob to select the next desired field.
4) Turn the small **FMS** Knob to enter the desired number.
5) Repeat steps 3 and 4 until the desired ADF frequency is entered.
6) Press the **ENT** Key to accept the new frequency.
7) Press the **ENT** Key again to transfer the frequency to the active field.
8) Turn the large **FMS** Knob to select the MODE field.
9) Turn the small **FMS** Knob to select ANT, ADF, ADF/BFO, or ANT/BFO.
10) Press the **ENT** Key to complete the selection.

DME TUNING

1) Press the **ADF/DME** Softkey.
2) If two DMEs are installed, turn the large **FMS** to select the DME source field.
3) Turn the small **FMS** Knob to select the desired Nav radio.
4) Press the **ENT** Key to complete the selection.
5) If two DMEs are installed, press the **AUX** Key on the desired audio panel to monitor DME2 audio.

ENTER A TRANSPONDER CODE

1) Press the **XPDR** Softkey (**XPDR/TFC** if the TCAS II option is available).
2) If the aircraft is equipped with two transponders, press the **XPDR1** or **XPDR2** Softkey to select the active transponder. If these softkeys are not present, proceed to step 3.
3) Press the **CODE** Softkey to display the transponder code selection softkeys, for digit entry.
4) Press the digit softkeys to enter the code in the code field. When entering the code, the next key in sequence must be pressed within 10 seconds, or the entry is cancelled and restored to the previous code. Five seconds after the fourth digit has been entered, the transponder code becomes active.

SELECT TRANSPONDER MODE

With TCAS II Option

1) Press the **XPDR/TFC** Softkey.
2) Press the **MODE** Softkey to display the transponder mode selection softkeys.
3) Press the desired transponder mode softkey (**STBY**, **ON**, or **ALT**).

Without TCAS II Option

1) Press the **XPDR** Softkey.
2) If the aircraft is equipped with two transponders, press the **XPDR1** or **XPDR2** Softkey to select the active transponder.
3) Press the desired transponder mode softkey (**STBY**, **ON**, **ALT**, or **GND**).

SELECTING A COM RADIO

Transmit/Receive

Press the **COM1 MIC**, **COM2 MIC**, or **COM3 MIC** Key (HF, if installed) on the audio panel.

Receive Only

Press the **COM1**, **COM2**, or **COM3** Key (HF, if installed) on the audio panel.

SELECTING A NAV RADIO

1) To begin navigating using a navigation radio, press the **CDI** Softkey on the PFD to select VOR1/LOC1 (NAV1) or VOR2/LOC2 (NAV2).
2) Press the **NAV1, NAV2, DME,** or **ADF** Key on the audio panel to select or deselect the navigation radio audio source. All radio keys can be selected individually or together.

NAV/COM TUNING

1) Press the small tuning knob to select the desired radio for tuning. A light blue box highlights the radio frequency to be tuned.
2) Turn the respective tuning knobs to enter the desired frequency into the standby frequency field. The large knob enters MHz and the small knob enters kHz.
3) Press the **Frequency Transfer** Key to place the frequency into the active frequency field.

INTERCOM

Pressing the **INTR COM** Key on either Audio Panel selects and deselects the intercom on both Audio Panels. The annunciator is lit when the intercom is active. The intercom connects the pilot and copilot together. Either the pilot or copilot may select or deselect the intercom.

The **CABIN** Key initiates two way communication between the pilot or copilot and the passengers in the cabin. The annunciator is lit when the cabin intercom is active on either Audio Panel.

When the flight crew wants to communicate with the passengers, the pilot or copilot presses the **CABIN** Key to signal that communication is desired. The cabin signal must be acknowledged to begin intercom conversation.

The **MAN SQ** Key allows either automatic or manual control of the intercom squelch setting. Pressing the **MAN SQ** Key enables manual squelch control, indicated by the MAN SQ annunciator.

- When the MAN SQ Annunciator is extinguished (Automatic Squelch is on), the **ICS** Knob controls only the volume (pressing the **ICS** Knob has no effect on the VOL/SQ selection).
- When the MAN SQ Annunciator is illuminated (Manual Squelch), the **ICS** Knob controls either volume or squelch (selected by pressing the **ICS** Knob and indicated by the VOL or SQ annunciation).

PASSENGER ADDRESS (PA) SYSTEM

A passenger address system is provided by pressing the **PA** Key to deliver messages to the passengers. The message is heard by the other pilot on the headset only if the **PA** Key is enabled on both audio panels. PA messages are one way from the flight deck to the passengers.

CLEARANCE RECORDER AND PLAYER

NOTE: *Pressing the play key on the pilot's Audio Panel plays recorded audio to the Pilot. Pressing the play key on the Copilot's Audio Panel plays recorded audio to the Copilot.*

Recorded COM audio is stored in separate memory blocks. Once 2.5 minutes of recording time have been reached, the recorder begins recording over the stored memory blocks, starting from the oldest block.

The **PLAY** Key controls the play function. The PLAY annunciator is illuminated to indicate when play is in progress. The PLAY annunciator extinguishes after playback is finished.

Pressing the **PLAY** Key once plays the latest recorded memory block and then returns to normal operation. Pressing the **PLAY** Key again during play of a memory block stops play. If a COM input signal is detected during play of a recorded memory block, play is halted.

Pressing the **PLAY** Key twice within one-half second while audio is playing plays the previous block of recorded audio. Each subsequent two presses of the **PLAY** Key within one-half second backtracks through the recorded memory blocks to reach and play any recorded block.

AUTOMATIC FLIGHT CONTROL SYSTEM

NOTE: If sensor information (other than attitude) required for a flight director mode becomes invalid or unavailable, the flight director automatically reverts to the default mode for that axis.

NOTE: If the attitude information required for the default flight director modes becomes invalid or unavailable, the autopilot automatically disengages.

FLIGHT DIRECTOR ACTIVATION

An initial press of a key listed in the following table (when the flight director is not active) activates the pilot-side flight director in the listed modes.

Control Pressed	Flight Director Activated	Modes Selected			
		Lateral		Vertical	
FD Key (pilot-side)	Pilot-side	Roll Hold (default)	ROL	Pitch Hold (default)	PIT
FD Key (copilot-side)	Copilot-side	Roll Hold (default)	ROL	Pitch Hold (default)	PIT
AP Key	Pilot-side	Roll Hold (default)	ROL	Pitch Hold (default)	PIT
TO/GA Switch	Pilot-side	Roll Hold (default) Roll Hold (default)	ROL ROL	Takeoff (on ground) Go Around (in air)	TO GA
ALT Key	Pilot-side	Roll Hold (default)	ROL	Altitude Hold	ALT
VS Key	Pilot-side	Roll Hold (default)	ROL	Vertical Speed	VS
VNV Key	Pilot-side	Roll Hold (default)	ROL	Vertical Path Tracking*	VPTH
NAV Key	Pilot-side	Navigation**	GPS VOR LOC BC	Pitch Hold (default)	PIT
APR Key	Pilot-side	Approach**	GPS VOR LOC	Pitch Hold (default) Glidepath Glideslope	PIT GP GS
HDG Key	Pilot-side	Heading Select	HDG	Pitch Hold (default)	PIT

Valid VNV flight plan must be entered before* ***VNV* *Key press activates flight director.*

The selected navigation receiver must have a valid VOR or LOC signal or active GPS course before* ***NAV *or* ***APR*** *Key press activates flight director.*

VERTICAL MODES

Vertical Mode	Description	Control	Annunciation
Pitch Hold	Holds the current aircraft pitch attitude; may be used to climb/descend to the Selected Altitude	(default)	PIT
Selected Altitude Capture	AFCS armed to capture the altitude displayed in the Selected Altitude window	*	ALTS
Altitude Hold	Holds the current Altitude Reference	**ALT** Key	ALT
Vertical Speed	Maintains the current aircraft vertical speed; may be used to climb/descend to the Selected Altitude	**VS** Key	VS
Flight Level Change	Maintains the current aircraft airspeed (in IAS or Mach) while the aircraft is climbing/descending to the Selected Altitude	**FLC** Key	FLC
			FLC
Vertical Path Tracking	Captures and tracks descent legs of an active vertical profile	**VNV** Key	VPTH
VNAV Target Altitude Capture	Captures the Vertical Navigation (VNV) Target Altitude	**	ALTV
Glidepath	Captures and tracks the SBAS glidepath on approach	**APR** Key	GP
Glideslope	Captures and tracks the ILS glideslope on approach		GS
Takeoff	Commands a constant pitch angle and wings level on the ground in preparation for takeoff	**TO/GA** Switch	TO
Go Around	Disengages the autopilot and commands a constant pitch attitude and wings level		GA

* *ALTS armed automatically when PIT, VS, FLC, or GA active, and under VPTH when Selected Altitude is to be captured instead of VNAV Target Altitude*

** *ALTV armed automatically under VPTH when VNAV Target Altitude is to be captured instead of Selected Altitude*

LATERAL MODES

Lateral Mode	Description	Control	Annunciation
Roll Hold	Holds the current aircraft roll attitude or rolls the wings level, depending on the commanded bank angle	(default)	ROL
Low Bank	Limits the maximum commanded roll angle	**BANK** Key	*
Heading Select**	Captures and tracks the Selected Heading	**HDG** Key	HDG
Navigation, GPS**	Captures and tracks the selected navigation source (GPS, VOR, LOC)	**NAV** Key	GPS
Navigation, VOR Enroute Capture/ Track**			VOR
Navigation, LOC Capture/Track (No Glideslope)			LOC
Navigation, Backcourse Arm/ Capture/Track	Captures and tracks a localizer signal for backcourse approaches		BC
Approach, GPS	Captures and tracks the selected navigation source (GPS, VOR, LOC)	**APR** Key	GPS
Approach, VOR Arm/Capture/Track			VAPP
Approach, LOC Capture/Track (Glideslope Mode automatically armed)			LOC

** No annunciation appears in the AFCS Status Box. The acceptable bank angle range is indicated in green along the Roll Scale of the Attitude Indicator.*
*** The Heading, Navigation GPS and Navigation VOR mode maximum roll command limit will be limited to the Low Bank mode value if it is engaged.*

Current Speed Control (CSC)

NOTE: *For CSC engagement and disengagement detailed conditions, see the approved Pilot's Operating Handbook (POH).*

Current Speed Control (CSC) is available (if installed) while the AFCS Altitude Hold Mode is active and the autopilot is engaged. When active, green arcs appear on the N1 gauges, at values corresponding to the current speed selected.

Selecting Current Speed Control (CSC):

1) Enter Altitude Hold Mode and engage the autopilot (see the AFCS Section for details).

2) Press the **CSC** Key (on the AFCS Control Unit).

GPS NAVIGATION

DIRECT-TO NAVIGATION

Direct-to Navigation using the MFD

1) Press the **Direct-to** (D▸) Key on the MFD or MFD Controller.
2) Enter the waypoint identifier.
3) Press the **ENT** Key to confirm the identifier. The 'Activate?' field is highlighted.
4) If no altitude constraint or course is desired, press the **ENT** Key to activate. To enter an altitude constraint, proceed to step 5.
5) Turn the large **FMS** Knob counterclockwise to place the cursor over the 'VNV' altitude field.
6) Enter the desired altitude.
7) Press the **ENT** Key. If the waypoint entered is an airport, the option to select MSL or AGL is now displayed. If the waypoint is not an airport, proceed to step 9.
8) Turn the small **FMS** Knob to select 'MSL' or 'AGL'.
9) Press the **ENT** Key. The cursor is now flashing in the VNV offset distance field.
10) Enter the desired offset distance before (-) the waypoint.
11) Press the **ENT** Key. The 'Activate?' field is highlighted.
12) Press the **ENT** Key to activate.

Direct-to Navigation using the PFD

1) Press the **Direct-to** Key (D▸) on the PFD.
2) Turn the large **FMS** Knob to place the cursor in the desired selection field.
3) Turn the small **FMS** Knob to begin selecting the desired identifier, location, etc.
4) Press the **ENT** Key.
5) The cursor is now flashing on 'ACTIVATE?'. If no altitude constraint or course is desired, press the **ENT** Key to activate. To enter an altitude constraint, proceed to step 6.
6) Turn the large **FMS** Knob counterclockwise to place the cursor over the 'ALT' altitude field.

7) Turn the small **FMS** Knob to enter the desired altitude constraint.
8) Press the **ENT** Key. If the waypoint entered is an airport, the option to select MSL or AGL is now displayed. If the waypoint is not an airport, proceed to step 10.
9) Turn the small **FMS** Knob to select 'MSL' or 'AGL'.
10) Press the **ENT** Key. The cursor is placed in the 'OFFSET' field.
11) Turn the small **FMS** Knob to enter the desired offset distance (-) from the selected Direct-to.
12) Press the **ENT** Key to highlight 'Activate?' or turn the large **FMS** Knob to highlight the 'CRS' field.
13) Turn the small **FMS** Knob to enter the desired course to the waypoint.
14) Press the **ENT** Key to highlight 'ACTIVATE?'.
15) Press the **ENT** Key again to activate the Direct-to.

ACTIVATE A STORED FLIGHT PLAN

1) Press the **FPL** Key on the MFD, or MFD Controller, and turn the small **FMS** Knob to display the Flight Plan Catalog Page.
2) Press the **FMS** Knob to activate the cursor.
3) Turn the large **FMS** Knob to highlight the desired flight plan
4) Select the **ACTIVE** Softkey. The confirmation window is now displayed.
5) With 'OK' highlighted, press the **ENT** Key to activate the flight plan. To cancel the flight plan activation, turn the large **FMS** Knob to highlight 'CANCEL' and press the **ENT** Key.

ACTIVATE A FLIGHT PLAN LEG

1) From the Active Flight Plan Page, press the **FMS** Knob to activate the cursor and turn the large **FMS** Knob to highlight the desired waypoint.
2) Select the **ACT LEG** Softkey.

   OR

   Press the **MENU** Key, select the 'Activate Leg' option from the page menu and press the **ENT** Key. This step must be used when activating a leg from the PFD.
3) With 'Activate' highlighted, press the **ENT** Key.

STOP NAVIGATING A FLIGHT PLAN

1) Press the **FPL** Key to display the Active Flight Plan Page.
2) Press the **MENU** Key to display the Page Menu Window.
3) Turn the large **FMS** Knob to highlight 'Delete Flight Plan' and press the **ENT** Key. With 'OK' highlighted, press the **ENT** Key to deactivate the flight plan. This will not delete the stored flight plan, only the active flight plan.

VERTICAL NAVIGATION (VNAV)

The navigation database only contains altitudes for procedures that call for "Cross at" altitudes. If the procedure states "Expect to cross at," the altitude is not in the database. In this case the altitude may be entered manually.

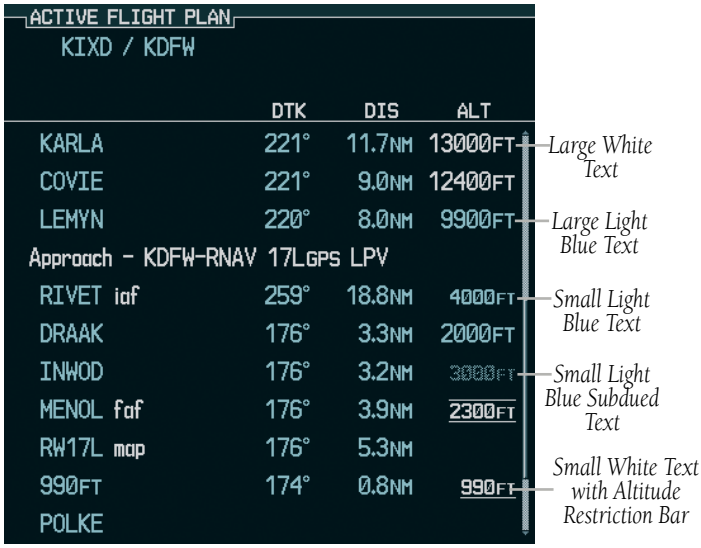
ACTIVE FLIGHT PLAN
KIXD / KDFW
DTK DIS ALT
KARLA 221° 11.7NM 13000FT
COVIE 221° 9.0NM 12400FT
LEMYN 220° 8.0NM 9900FT
Approach - KDFW-RNAV 17LGPS LPV
RIVET iaf 259° 18.8NM 4000FT
DRAAK 176° 3.3NM 2000FT
INWOD 176° 3.2NM 3000FT
MENOL faf 176° 3.9NM 2300FT
RW17L map 176° 5.3NM
990FT 174° 0.8NM 990FT
POLKE
Large White Text
Large Light Blue Text
Small Light Blue Text
Small Light Blue Subdued Text
Small White Text with Altitude Restriction Bar

Cross AT or ABOVE 5,000 ft

Cross AT 2,300 ft

Cross AT or BELOW 3,000 ft

Altitudes associated with arrival and approach procedures are "auto-designated". This means the system will automatically use the altitudes loaded with the arrival or approach for giving vertical flight path guidance outside the FAF. Note that these altitudes will be displayed as small light blue text.

Altitudes that are designated for use in vertical navigation may also be made "non-designated" by placing the cursor over the desired altitude and pressing the **CLR** Key. The altitude is now displayed only as a reference. It will not be used to give vertical flight path guidance. Other displayed altitudes may change due to re-calculations or rendered invalid as a result of manually changing an altitude to a non-designated altitude.

	White Text	Light Blue Text	Light Blue Subdued Text
Large Text	Altitude calculated by the system estimating the altitude of the aircraft as it passes over the navigation point. This altitude is provided as a reference and is not designated to be used in determining vertical flight path guidance.	Altitude has been entered by the pilot. Altitude is designated for use in giving vertical flight path guidance. Altitude does not match the published altitude in navigation database or no published altitude exists.	The system cannot use this altitude in determining vertical flight path guidance.
Small Text	Altitude is not designated to be used in determining vertical flight path guidance. Altitude has been retrieved from the navigation database and is provided as a reference.	Altitude is designated for use in giving vertical flight path guidance. Altitude has been retrieved from the navigation database or has been entered by the pilot and matches a published altitude in the navigation database.	The system cannot use this altitude in determining vertical flight path guidance.

FLIGHT PLANNING

WEIGHT PLANNING

All procedures apply to the MFD unless otherwise stated.

Entering Weight Parameters

Turn the large **FMS** Knob to select the 'AUX' page group. Turn the small **FMS** Knob to select the Weight Planning Page.

1) Select the **EMPTY WT** Softkey to place the cursor in the Basic Empty Weight field.
2) Enter the desired aircraft empty weight.
3) Press the **ENT** Key. The cursor is now over the 'PILOT & STORES' field.
4) Enter the desired weight of Pilot & Stores.
5) Press the **ENT** Key.
6) Continue repeating these steps until all desired weights have been entered.

Entering Fuel Parameters

1) If necessary, press the **FMS** Knob to activate the cursor.
2) Turn the large **FMS** Knob to place the cursor in the 'FUEL ON BOARD' field.
3) Select the **FOB SYNC** Softkey to enter the fuel on board quantity as read from the aircraft fuel quantity sensors.

   Or:

   Manually enter the desired fuel quantity.
4) Press the **ENT** Key. The cursor is now in the 'FUEL RESERVES' field.
5) Enter the desired reserve fuel quantity.
6) Press the **FMS** Knob to remove the cursor.

TRIP PLANNING

1) Turn the large **FMS** Knob to select the 'AUX' page group.
2) Turn the small **FMS** Knob to select the Trip Planning Page.
3) The current 'PAGE MODE' is displayed at the top of the page: 'AUTOMATIC' or 'MANUAL'. To change the page mode, select the **AUTO** or **MANUAL** Softkey.

4) For Direct-to planning:

a) Select the **WPTS** Softkey and verify that the starting waypoint field indicates 'P.POS' (present position).

b) If necessary, press the **MENU** Key and select 'Set WPT to Present Position' to display 'P.POS'.

c) Press the **ENT** Key and the flashing cursor moves to the ending waypoint field.

d) Enter the identifier of the ending waypoint and press the **ENT** Key to accept the waypoint.

Or:

For point-to-point planning:

a) Enter the identifier of the starting waypoint.

b) Once the waypoint's identifier is entered, press the **ENT** Key to accept the waypoint. The flashing cursor moves to the ending waypoint.

c) Again, enter the identifier of the ending waypoint.

d) Press the **ENT** Key to accept the waypoint.

Or:

For flight plan leg planning:

a) Select the **FPL** Softkey (at the bottom of the display).

b) Turn the small **FMS** Knob to select the desired flight plan (already stored in memory), by number.

c) Turn the large **FMS** Knob to highlight the 'LEG' field.

d) Turn the small **FMS** Knob to select the desired leg of the flight plan, or select 'CUM' to apply trip planning calculations to the entire flight plan. Selecting 'FPL 00' displays the active flight plan. If an active flight plan is selected, 'REM' will be an available option to display planning data for the remainder of the flight plan.

NOTE: *The page mode must be set to 'MANUAL' to perform the following steps.*

5) Turn the large **FMS** Knob to highlight the departure time (DEP TIME) field.

NOTE: *The departure time on the Trip Planning Page is used for preflight planning. Refer to the Utility Page for the actual flight departure time.*

6) Enter the departure time. Press the **ENT** Key when finished. Departure time may be entered in local or UTC time, depending upon system settings.

7) The flashing cursor moves to the ground speed (GS) field. Enter the ground speed. Press the **ENT** Key when finished. Note that in 'automatic' page mode, ground speed is provided by the system.

8) The flashing cursor moves to the fuel flow field. Enter the fuel flow. Press the **ENT** Key when finished. Note that in 'AUTOMATIC' page mode, fuel flow is provided by the system.

9) The flashing cursor moves to the fuel onboard field. Modify the fuel onboard. Press the **ENT** Key when finished. In 'AUTOMATIC' mode, fuel onboard is provided by the entry made on the Weight Planning Page.

10) The flashing cursor moves to the calibrated airspeed (CALIBRATED AS) field. Enter the calibrated airspeed. Press the **ENT** Key when finished. Note that in 'AUTOMATIC' page mode, calibrated airspeed is provided by the system.

11) The flashing cursor moves to the altitude (IND ALTITUDE) field. Enter the altitude. Press the **ENT** Key when finished. Note that in 'AUTOMATIC' page mode, altitude is provided by the system.

12) The flashing cursor moves to the barometric setting (PRESSURE) field. Enter the desired baro setting. Press the **ENT** Key when finished. Note that in 'AUTOMATIC' page mode, the baro setting is provided by the setting entered on the PFD.

13) The flashing cursor moves to the air temperature (TOTAL AIR TEMP) field. Enter the desired air temperature. Press the **ENT** Key when finished. Note that in 'AUTOMATIC' page mode, air temperature is provided by the system outside air temperature.

CREATE A USER WAYPOINT DEFINED BY LATITUDE & LONGITUDE

1) Turn the large **FMS** Knob on the Control Unit to select the 'WPT' page group.

2) Turn the small **FMS** Knob to select the User WPT Information Page.

3) Select the **NEW** Softkey. A waypoint is created at the current aircraft position.

4) Enter the desired waypoint name.

5) Press the **ENT** Key.

6) The cursor is now in the 'WAYPOINT TYPE' field. If desired, the waypoint can be made temporary (deleted automatically when the system is turned off). If the waypoint is to remain in the system, proceed to step 7.
   a) Turn the large **FMS** Knob one click to the left to highlight 'TEMPORARY'.
   b) Press the **ENT** Key to place a check-mark in the box. Turn the large **FMS** Knob to place the cursor back in the 'WAYPOINT TYPE' field.
7) With the cursor in the 'WAYPOINT TYPE' field, turn the small **FMS** Knob to display a list of waypoint types.
8) Turn the small **FMS** Knob to select LAT/LON (latitude and longitude).
9) Press the **ENT** Key.

CREATE A USER WAYPOINT DEFINED BY RADIALS FROM OTHER WAYPOINTS

1) Turn the large **FMS** Knob on the Control Unit to select the 'WPT' page group.
2) Turn the small **FMS** Knob to select the User WPT Information Page.
3) Select the **NEW** Softkey. A waypoint is created at the current aircraft position.
4) Enter the desired waypoint name.
5) Press the **ENT** Key.
6) The cursor is now in the 'WAYPOINT TYPE' field. If desired, the waypoint can be made temporary (deleted automatically when the system is turned off). If the waypoint is to remain in the system, proceed to step 7.
   a) Turn the large **FMS** Knob one click to the left to highlight 'TEMPORARY'.
   b) Press the **ENT** Key to place a check-mark in the box. Turn the large **FMS** Knob to place the cursor back in the 'WAYPOINT TYPE' field.
7) With the cursor in the 'WAYPOINT TYPE' field, turn the small **FMS** Knob to display a list of waypoint types.
8) Turn the small **FMS** Knob to select RAD/RAD (radial/radial).
9) Press the **ENT** Key.
10) The cursor moves to the 'REFERENCE WAYPOINTS' field. With the first waypoint name highlighted, use the **FMS** Knobs to enter the desired waypoint name. Waypoints may also be selected as follows:

a) When a flight plan is active, turning the small **FMS** Knob to the left will display a list of the flight plan waypoints.

b) Turn the large **FMS** Knob to select the desired waypoint.

c) Press the **ENT** Key.

Or:

a) Turn the small **FMS** Knob to the left. Initially, a flight plan waypoint list is displayed.

b) Turn the small **FMS** Knob to the right to display the 'NRST' airports to the aircraft's current position.

c) Turn the large **FMS** Knob to select the desired waypoint.

d) Press the **ENT** Key.

Or:

a) Turn the small **FMS** Knob to the left. Initially, a flight plan waypoint list is displayed.

b) Turn the small **FMS** Knob to the right to display the 'RECENT' waypoints.

c) Turn the large **FMS** Knob to select the desired waypoint.

d) Press the **ENT** Key.

Or:

a) Turn the small **FMS** Knob to the left. Initially, a flight plan waypoint list is displayed.

b) Turn the small **FMS** Knob to the right to display the 'USER' waypoints.

c) Turn the large **FMS** Knob to select the desired waypoint.

d) Press the **ENT** Key.

11) Press the **ENT** Key. The cursor is displayed in the 'RAD' (radial) field. Enter the desired radial from the reference waypoint.

12) Press the **ENT** Key.

13) Repeat step 10 to enter the next waypoint name.

14) Press the **ENT** Key. The cursor is displayed in the 'RAD' (radial) field for the second waypoint. Enter the desired radial from the reference waypoint.

15) Press the **ENT** Key.

16) Press the **FMS** Knob to remove the flashing cursor.

CREATE A USER WAYPOINT DEFINED BY A RADIAL & DISTANCE FROM ANOTHER WAYPOINT

1) Turn the large **FMS** Knob on the MFD Control Unit to select the 'WPT' page group.

2) Turn the small **FMS** Knob to select the User WPT Information Page.

3) Select the **NEW** Softkey. A waypoint is created at the current aircraft position.

4) Enter the desired waypoint name.

5) Press the **ENT** Key.

6) The cursor is now in the 'WAYPOINT TYPE' field. If desired, the waypoint can be made temporary (deleted automatically when the system is turned off). If the waypoint is to remain in the system, proceed to step 7.

- **a)** Turn the large **FMS** Knob one click to the left to highlight 'TEMPORARY'.
- **b)** Press the **ENT** Key to place a check-mark in the box. Turn the large **FMS** Knob to place the cursor back in the 'WAYPOINT TYPE' field.

7) With the cursor in the 'WAYPOINT TYPE' field, turn the small **FMS** Knob to display a list of waypoint types.

8) Turn the small **FMS** Knob to select RAD/DIS (radial/distance).

9) Press the **ENT** Key.

10) The cursor moves to the 'REFERENCE WAYPOINTS' field. With the first waypoint name highlighted, use the **FMS** Knobs to enter the desired waypoint name. Waypoints may also be selected as follows:

- **a)** When a flight plan is active, turning the small **FMS** Knob to the left will display a list of the flight plan waypoints.
- **b)** Turn the large **FMS** Knob to select the desired waypoint.
- **c)** Press the **ENT** Key.

Or:

- **a)** Turn the small **FMS** Knob to the left. Initially, a flight plan waypoint list is displayed.
- **b)** Turn the small **FMS** Knob to the right to display the 'NRST' airports to the aircraft's current position.

c) Turn the large **FMS** Knob to select the desired waypoint.

d) Press the **ENT** Key.

Or:

a) Turn the small **FMS** Knob to the left. Initially, a flight plan waypoint list is displayed.

b) Turn the small **FMS** Knob to the right to display the 'RECENT' waypoints.

c) Turn the large **FMS** Knob to select the desired waypoint.

d) Press the **ENT** Key.

Or:

a) Turn the small **FMS** Knob to the left. Initially, a flight plan waypoint list is displayed.

b) Turn the small **FMS** Knob to the right to display the 'USER' waypoints.

c) Turn the large **FMS** Knob to select the desired waypoint.

d) Press the **ENT** Key.

11) Press the **ENT** Key. The cursor is displayed in the 'RAD' (radial) field. Enter the desired radial from the reference waypoint.

12) Press the **ENT** Key.

13) The cursor is now displayed in the 'DIS' (distance) field. Enter the desired distance from the reference waypoint.

14) Press the **ENT** Key.

15) Press the **FMS** Knob to remove the flashing cursor.

DELETE A USER WAYPOINT

1) Turn the large **FMS** Knob to select the 'WPT' page group.

2) Turn the small **FMS** Knob to select the User WPT Information Page.

3) Press the **FMS** Knob to activate the cursor.

4) Turn the large **FMS** Knob to the place the cursor in the 'USER WAYPOINT LIST' field.

5) Turn the small **FMS** Knob to highlight the desired waypoint.

6) Select the **DELETE** Softkey.

7) The message 'Would you like to delete the user waypoint?' is displayed. With 'YES' highlighted, press the **ENT** Key.

CREATE A FLIGHT PLAN

NOTE: When creating a flight plan in the Active Flight Plan Window, the first leg is activated automatically after it is created.

Creating an active flight plan:

1) Press the **FPL** Key.
2) Press the **FMS** Knob to activate the cursor (only on MFD).
3) Turn the small **FMS** Knob to display the Waypoint Information Window. (Turning it clockwise displays a blank Waypoint Information Window, turning it counter-clockwise displays the Waypoint Information Window with a waypoint selection submenu allowing selection of active flight plan, nearest, recent, user, or airway waypoints).
4) Enter the identifier, facility, or city name of the departure waypoint or select a waypoint from the submenu of waypoints and press the **ENT** Key. The active flight plan is modified as each waypoint is entered.
5) Repeat step numbers 3 and 4 to enter each additional flight plan waypoint.
6) When all waypoints have been entered, press the **FMS** Knob to remove the cursor.

Creating a stored flight plan:

1) Press the **FPL** Key.
2) Turn the small **FMS** Knob clockwise to display the Flight Plan Catalog Page.
3) Select the **NEW** Softkey; or press the **MENU** Key, highlight 'Create New Flight Plan', and press the **ENT** Key to display a blank flight plan for the first empty storage location.
4) Turn the small **FMS** Knob to display the Waypoint Information Window. (Turning it clockwise displays a blank Waypoint Information Window, turning it counter-clockwise displays the Waypoint Information Window with a waypoint selection submenu allowing selection of active flight plan, nearest, recent, user, or airway waypoints).
5) Enter the identifier, facility, or city name of the departure waypoint or select a waypoint from the submenu of waypoints and press the **ENT** Key.
6) Repeat step numbers 4 and 5 to enter each additional flight plan waypoint.
7) When all waypoints have been entered, press the **FMS** Knob to return to the Flight Plan Catalog Page. The new flight plan is now in the list.

IMPORT A FLIGHT PLAN FROM AN SD CARD

1) Insert the SD card containing the flight plan in the top card slot on the MFD.
2) Press the **FPL** Key on the Control Unit to display the Active Flight Plan Page on the MFD.
3) Turn the small **FMS** Knob to select the Flight Plan Catalog Page.
4) Press the **FMS** Knob to activate the cursor.
5) Turn either **FMS** Knob to highlight an empty or existing flight plan.
6) Select the **IMPORT** Softkey.

   If an empty flight plan is selected, a list of the available flight plans on the SD card will be displayed.

   Or:

   If an existing flight plan is selected, an 'Overwrite existing flight plan? OK or CANCEL' prompt is displayed. Press the **ENT** Key to choose to overwrite the selected flight plan and see a list of the available flight plans on the SD card. If overwriting the existing flight plan is not desired, select 'CANCEL' using the **FMS** Knob, press the **ENT** Key, select another existing or empty flight plan, and again select the **IMPORT** Softkey.
7) Turn the small **FMS** Knob to highlight the desired flight plan for importing.
8) Press the **ENT** Key.

INSERT A WAYPOINT IN THE ACTIVE FLIGHT PLAN

1) Press the **FPL** Key to display the active flight plan.
2) If necessary, press the **FMS** Knob to activate the cursor.
3) Turn the large **FMS** Knob to highlight the desired flight plan waypoint. The new waypoint is inserted before the highlighted waypoint.
4) Turn the small **FMS** Knob. The Waypoint Information Window is now displayed.
5) Enter the new flight plan waypoint by one of the following:
   a) Enter the user waypoint identifier, facility, or city.
   b) Press the **ENT** Key.

      Or:

a) Turn the small **FMS** Knob to the left. Initially, a flight plan waypoint list is displayed.

b) Turn the small **FMS** Knob to the right to display the 'NRST' airport waypoints to the aircraft's current position.

c) Turn the large **FMS** Knob to select the desired waypoint.

d) Press the **ENT** Key.

Or:

a) Turn the small **FMS** Knob to the left. Initially, a flight plan waypoint list is displayed.

b) Turn the small **FMS** Knob to the right to display the 'RECENT' waypoints.

c) Turn the large **FMS** Knob to select the desired waypoint.

d) Press the **ENT** Key.

Or:

a) Turn the small **FMS** Knob to the left. Initially, a flight plan waypoint list is displayed.

b) Turn the small **FMS** Knob to the right to display the 'USER' waypoints.

c) Turn the large **FMS** Knob to select the desired user waypoint.

d) Press the **ENT** Key.

6) Press the **ENT** Key again to "accept" the waypoint.

ENTER AN AIRWAY IN A FLIGHT PLAN

1) Press the **FPL** Key.

2) Press the **FMS** Knob to activate the cursor (not required on the PFD).

3) Turn the large **FMS** Knob to highlight the waypoint after the desired airway entry point. If this waypoint is not a valid airway entry point, a valid entry point should be entered at this time.

4) Turn the small **FMS** Knob one click clockwise and select the **LD AIRWY** Softkey, or press the **MENU** Key and select "Load Airway". The Select Airway Page is displayed. The **LD AIRWY** Softkey or the "Load Airway" menu item is available only when an acceptable airway entry waypoint has been chosen (the waypoint ahead of the cursor position).

5) Turn the **FMS** Knob to select the desired airway from the list, and press the **ENT** Key. Low altitude airways are shown first in the list, followed by "all" altitude airways, and then high altitude airways.

6) Turn the **FMS** Knob to select the desired airway exit point from the list, and press the **ENT** Key. 'LOAD?' is highlighted.

7) Press the **ENT** Key. The system returns to editing the flight plan with the new airway inserted.

INVERT AN ACTIVE FLIGHT PLAN

1) Press the **FPL** Key to display the active flight plan.

2) Press the **MENU** Key to display the Page Menu.

3) Turn the large **FMS** Knob to highlight 'Invert Flight Plan'.

4) Press the **ENT** Key. The original flight plan remains intact in its flight plan catalog storage location.

5) With 'OK' highlighted, press the **ENT** Key to invert the flight plan.

REMOVE A DEPARTURE, ARRIVAL, APPROACH, OR AIRWAY FROM A FLIGHT PLAN

1) Press the **FPL** Key to display the active flight plan. Press the **FMS** Knob to activate the cursor.

   Or, for a stored flight plan:

   a) Press the MFD **FPL** Key and turn the small **FMS** Knob to select the Flight Plan Catalog Page.

   b) Press the **FMS** Knob to activate the cursor.

   c) Turn the large **FMS** Knob to highlight the desired flight plan.

   d) Select the **EDIT** Softkey.

2) Turn the large **FMS** Knob to highlight the title for the approach, departure, arrival, or airway to be deleted. Titles appear in white directly above the procedure's waypoints.

3) Press the **CLR** Key to display a confirmation window.

4) With 'OK' highlighted, press the **ENT** Key to remove the selected procedure or airway.

STORE A FLIGHT PLAN

1) After creating a flight plan on either the PFD or MFD, it may be saved by pressing the **MENU** Key.
2) Turn the large **FMS** Knob to highlight 'Store Flight Plan' and press the **ENT** Key.
3) With 'OK' highlighted, press the **ENT** Key to store the flight plan.

EDIT A STORED FLIGHT PLAN

1) Press the **FPL** Key for the MFD and turn the small **FMS** Knob to display the Flight Plan Catalog Page.
2) Press the **FMS** Knob to activate the cursor.
3) Turn the large **FMS** Knob to highlight the desired flight plan.
4) Select the **EDIT** Softkey.
5) Turn the large **FMS** Knob to place the cursor in the desired location.
6) Enter the changes, then press the **ENT** Key.
7) Press the **FMS** Knob to return to the Flight Plan Catalog Page.

DELETE A WAYPOINT FROM THE FLIGHT PLAN

1) Press the **FPL** Key to display the active flight plan. Press the **FMS** Knob to activate the cursor.

   Or, for a stored flight plan:

   a) Press the **FPL** Key of the MFD and turn the small **FMS** Knob to select the Flight Plan Catalog Page.

   b) Press the **FMS** Knob to activate the cursor.

   c) Turn the large **FMS** Knob to highlight the desired flight plan.

   d) Select the **EDIT** Softkey.
2) Turn the large **FMS** Knob to highlight the waypoint to be deleted.
3) Press the **CLR** Key to display a 'REMOVE (Wpt Name)?' confirmation window.
4) With 'OK' highlighted, press the **ENT** Key to remove the waypoint. To cancel the delete request, turn the large **FMS** Knob to highlight 'CANCEL' and press the **ENT** Key.
5) Once all changes have been made, press the **FMS** Knob to remove the cursor.

INVERT AND ACTIVATE A STORED FLIGHT PLAN

1) Press the **FPL** Key on the MFD or MFD Control Unit.
2) Turn the small **FMS** Knob to select the Flight Plan Catalog Page.
3) Press the **FMS** Knob to activate the cursor.
4) Turn the large **FMS** Knob to highlight the desired flight plan.
5) Select the **INVERT** Softkey. 'Invert and activate stored flight plan?' is displayed.
6) With 'OK' highlighted, press the **ENT** Key. The selected flight plan is now inverted and activated. The original flight plan remains intact in its flight plan catalog storage location.

COPY A FLIGHT PLAN

1) Press the **FPL** Key on the MFD or MFD Control Unit.
2) Turn the small **FMS** Knob to select the Flight Plan Catalog Page.
3) Press the **FMS** Knob to activate the cursor.
4) Turn the large **FMS** Knob to highlight the flight plan to be copied.
5) Select the **COPY** Softkey. A 'Copy to flight plan #?' confirmation window is displayed.
6) With 'OK' highlighted, press the **ENT** Key to copy the flight plan. To cancel, turn the large **FMS** Knob to highlight 'CANCEL' and press the **ENT** Key.

DELETE A FLIGHT PLAN

1) Press the **FPL** Key on the MFD or MFD Control Unit.
2) Turn the small **FMS** Knob to select the Flight Plan Catalog Page.
3) Press the **FMS** Knob to activate the cursor.
4) Turn the large **FMS** Knob to highlight the flight plan to be deleted.
5) Select the **DELETE** Softkey. A 'Delete flight plan #?' confirmation window is displayed.
6) With 'OK' highlighted, press the **ENT** Key to delete the flight plan. To cancel, turn the large **FMS** Knob to highlight 'CANCEL' and press the **ENT** Key.

GRAPHICAL FLIGHT PLAN CREATION

1) Press the **FPL** Key to display the Active Flight Plan Page on the MFD.
2) Press the **Joystick** to activate the map pointer. Use the **Joystick** to move the pointer to the desired point on the map to be inserted as a waypoint in the flight plan.
3) The default insertion point is at the end of the flight plan. If the selected waypoint is to be placed anywhere other than the end of the flight plan, press the **FMS** Knob to activate the cursor. Waypoints are inserted *ABOVE* the cursor. Turn the large **FMS** Knob to select the desired insertion point.
4) Select the **LD WPT** Softkey. The selected waypoint is inserted at the selected point. The default user waypoint naming is USR000, USR001, USR002, and so on.
5) To change the user waypoint name, follow the procedure for modifying a user waypoint.

EXPORT A FLIGHT PLAN TO AN SD CARD

1) Insert the SD card into the top card slot on the MFD.
2) Press the **FPL** Key on the Contol Unit to display the Active Flight Plan Page on the MFD.
3) Turn the small **FMS** Knob to select the Flight Plan Catalog Page.
4) Press the **FMS** Knob to activate the cursor.
5) Turn the large **FMS** Knob to highlight the flight plan to be exported.
6) Select the **EXPORT** Softkey.
7) Press the **ENT** Key to confirm the export.

PROCEDURES

LOAD AND ACTIVATE A DEPARTURE PROCEDURE

1) Press the **PROC** Key.
2) Turn the large **FMS** Knob to highlight 'SELECT DEPARTURE'.
3) Press the **ENT** Key. The cursor is displayed in the 'DEPARTURE' field with a list of available departures.
4) Turn the large **FMS** Knob to highlight the desired departure.
5) Press the **ENT** Key. A list of runways may be displayed for the departure. If so, turn either **FMS** Knob to select the desired runway.
6) Press the **ENT** Key. The cursor is displayed in the 'TRANSITION' field with a list of available transitions.
7) Turn the large **FMS** Knob to highlight the desired transition.
8) Press the **ENT** Key.
9) With 'LOAD?' highlighted, press the **ENT** Key. The departure is active when the flight plan is active.

ACTIVATE A DEPARTURE LEG

1) Press the **FPL** Key on the MFD or MFD Control Unit to display the active flight plan.
2) Press the **FMS** Knob to activate the cursor.
3) Turn the large **FMS** Knob to highlight the TO waypoint of the desired leg within the departure.
4) Select the **ACT LEG** Softkey. A confirmation window showing the selected leg is displayed.
5) With 'ACTIVATE' highlighted, press the **ENT** Key.

LOAD AN ARRIVAL PROCEDURE

1) Press the **PROC** Key.
2) Turn the large **FMS** Knob to highlight 'SELECT ARRIVAL'.
3) Press the **ENT** Key. The cursor is displayed in the 'ARRIVAL' field with a list of available arrivals.

4) Turn the large **FMS** Knob to highlight the desired arrival.
5) Press the **ENT** Key. A list of transitions is displayed for the selected arrival.
6) Turn either **FMS** Knob to select the desired transition.
7) Press the **ENT** Key. A list of runways may be displayed for the selected arrival.
8) Turn the large **FMS** Knob to highlight the desired runway.
9) Press the **ENT** Key.
10) With 'LOAD?' highlighted, press the **ENT** Key.
11) The arrival becomes part of the active flight plan.

ACTIVATE AN ARRIVAL LEG

1) Press the **FPL** Key to display the active flight plan.
2) Press the **FMS** Knob to activate the cursor.
3) Turn the large **FMS** Knob to highlight the TO waypoint of the desired leg within the arrival.
4) Select the **ACT LEG** Softkey. A confirmation window showing the selected leg is displayed.
5) With 'ACTIVATE' highlighted, press the **ENT** Key.

LOAD AND/OR ACTIVATE AN APPROACH PROCEDURE

NOTE: *If certain GPS parameters (SBAS, RAIM, etc.) are not available, some published approach procedures for the desired airport may not be displayed in the list of available approaches.*

1) Press the **PROC** Key.
2) Turn the large **FMS** Knob to highlight 'SELECT APPROACH'.
3) Press the **ENT** Key. A list of available approaches for the destination airport is displayed.
4) Turn either **FMS** Knob to highlight the desired approach.
5) Press the **ENT** Key. A list of available transitions for the selected approach procedure is now displayed.

6) Turn either **FMS** Knob to select the desired transition. The "Vectors" option assumes vectors will be received to the final course segment of the approach and will provide navigation guidance relative to the final approach course.

7) Press the **ENT** Key. The cursor moves to the MINIMUMS field.

8) If desired, the DA/MDA for the selected approach procedure may be entered and displayed on the PFD. Turn the small **FMS** Knob in the direction of the green arrow to change the display from OFF to BARO or optional RAD ALT.

9) Press the **ENT** Key. The cursor moves to the altitude field. Turn the small **FMS** Knob to enter the published DA/MDA for the selected approach procedure.

10) Press the **ENT** Key. 'LOAD? or ACTIVATE?' is now displayed with 'LOAD?' highlighted.

11) Turn the large **FMS** Knob to select either 'LOAD?' or 'ACTIVATE?'.

    Selecting 'LOAD?' enters the selected approach procedure into the active flight plan, but is not currently active. Selecting 'ACTIVATE?' enters the selected approach procedure into the active flight plan and activates the first leg of the approach.

12) Press the **ENT** Key.

ACTIVATE AN APPROACH IN THE ACTIVE FLIGHT PLAN

1) Press the **PROC** Key.
2) Turn the large **FMS** Knob to highlight 'ACTIVATE APPROACH'.
3) Press the **ENT** Key.

ACTIVATE A VECTOR TO FINAL APPROACH FIX

1) Press the **PROC** Key.
2) Turn the large **FMS** Knob to highlight 'ACTIVATE VECTOR-TO-FINAL'.
3) Press the **ENT** Key.
4) The final approach course becomes the active leg.

ACTIVATE A MISSED APPROACH IN THE ACTIVE FLIGHT PLAN

1) Press the **PROC** Key.
2) Turn the large **FMS** Knob to highlight 'ACTIVATE MISSED APPROACH'.
3) Press the **ENT** Key. A confirmation window is displayed.
4) With 'ACTIVATE' highlighted, press the **ENT** Key.

   Or:

   Press the TO/GA switch.

HAZARD AVOIDANCE

CUSTOMIZING THE HAZARD DISPLAYS ON THE NAVIGATION MAP

1) With the Navigation Map Page displayed, press the **MENU** Key to display the Navigation Map Page Menu. The cursor flashes on the 'Map Setup' option.
2) Press the **ENT** Key. The Map Setup Menu is displayed. Turn the small **FMS** Knob to select 'Weather' to customize the display of weather features. Select 'Traffic' to customize the display of traffic.
3) Press the small **FMS** Knob to return to the Navigation Map Page.

SIRIUSXM WEATHER (SUBSCRIPTION OPTIONAL)

***WARNING:** Use of SiriusXM Weather for hazardous weather penetration is not recommended. Weather information provided by SirriusXM Satellite Radio is approved only for weather avoidance, not penetration.*

Displaying SiriusXM Weather on the Navigation Map Page

1) Select the **MAP** Softkey.
2) Select the **NEXRAD** or **XM LTNG** Softkey to display the desired weather. Select the applicable softkey again to remove weather data from the Navigation Map Page.

Display METAR and TAF information on the Airport Information Page

1) Turn the large **FMS** Knob to select the WPT Page Group.
2) Turn the small **FMS** Knob to select the Airport Information Page.
3) Select the **WX** Softkey to display METAR and TAF text (METAR and TAF information is updated every 12 minutes).

Displaying Weather on the XM Weather Data Link Page

1) Turn the large **FMS** Knob to select the Map Page Group.
2) Turn the small **FMS** Knob to select the XM Weather Data Link Page.
3) Select the available softkeys to select the desired SiriusXM Weather product.
4) Select the **LEGEND** Softkey to view the legends for the selected products. If necessary, turn either **FMS** Knob to scroll through the list. Press the small **FMS** Knob or the **ENT** Key to return to the map.

Map Panning Information – XM Weather Data Link Page

1) Push in the **Joystick** to display the panning arrow.
2) Move the **Joystick** to place the panning arrow on AIRMETs, TFRs, METARs, SIGMETs, PIREPs or AIREPs.
3) Press the **ENT** Key to display pertinent information for the selected product.

   Note that pressing the **ENT** Key when panning over an AIRMET or a SIGMET displays an information box that shows the text of the report. Panning over an airport with METAR information does not display more information but allows the user to press the **ENT** Key and select that Airport's Information Page to display the text of the report. Pressing the **ENT** Key when panning over a TFR displays TFR specific information.

Weather Products and Symbols

Wx Product Status Icons	Description
	NEXRAD - Available for the US and Canada. The age of the displayed data for each is shown at the right.
	ECHO TOP - The age of the displayed data is shown at the right. Not displayed when CLOUD TOP is displayed.
	CLOUD TOP - The age of the displayed data is shown at the right. Not displayed when ECHO TOP is displayed.
	XM LIGHTNING - The age of the displayed data is shown at the right.
	CELL MOVEMENT - The age of the displayed data is shown at the right.
	SIGMET & AIRMET - The age of the displayed data for each is shown at the right.
	METAR - Available for the US and Canada. The age of the displayed data for each is shown at the right.
	SURFACE ANALYSIS with CITY FORECAST - The upper symbol depicts Surface Analysis. The lower symbol depicts City Forecast. The age of the displayed data for each is shown at the right. The selected forecast period is shown at the bottom.

Wx Product Status Icons	Description
	FREEZING LEVEL - The age of the displayed data is shown at the right.
	WINDS ALOFT - Available for the US and Canada. The age of the displayed data for each is shown at the right. The altitude selection is shown at the bottom.
	COUNTY WARNING - The age of the displayed data is shown at the right.
	CYCLONE WARNING - The age of the displayed data is shown at the right.
	AIREP - The age of the displayed data is shown at the right.
	PIREP - The age of the displayed data is shown at the right. Urgent Pireps are displayed in yellow.
	TURBULENCE - The age of the displayed data is shown at the right. The altitude selection is shown at the bottom.
	ICING POTENTIAL - The age of the displayed data is shown at the right. The altitude selection is shown at the bottom.

TRAFFIC INFORMATION SERVICE (TIS)

NOTE: *If the system is configured to use the optional TCAS II, TIS is not available for use.*

NOTE: *Traffic Information Service (TIS) is only available when the aircraft is within the service volume of a TIS capable terminal radar site.*

Traffic Symbol	Description
	Non-Threat Traffic (intruder is beyond 5 nm and greater than 1200' vertical separation)
	Traffic Advisory (TA) (closing rate, distance, and vertical separation meet TA criteria)
	Traffic Advisory Off Scale

Traffic Symbol Description

Displaying Traffic on the Traffic Map Page

1) Turn the large **FMS** Knob to select the Map Page Group.
2) Turn the small **FMS** Knob to select the Traffic Map Page.
3) Select the **OPERATE** Softkey to begin displaying traffic. 'OPERATING' is displayed in the Traffic Mode field.
4) Select the **STANDBY** Softkey to place the system in the Standby Mode. 'STANDBY' will be displayed in the Traffic Mode field.
5) Rotate the **Joystick** clockwise to display a larger area or rotate counter-clockwise to display a smaller area.
6) Select the **TNA MUTE** Softkey to mute the "TIS Not Available" aural alert.

Displaying Traffic on the Navigation Map

1) Ensure TIS is operating. With the Navigation Map displayed, select the **MAP** Softkey.
2) Select the **TRAFFIC** Softkey. Traffic will now be displayed on the map.

TRAFFIC COLLISION AVOIDANCE SYSTEM (TCAS II) (OPTIONAL)

NOTE: *If the system is configured to use TIS, the optional TCAS II is not available for use.*

WARNING: *The TCAS II system is intended for advisory use only. TCAS II is intended to help the pilot locate transponder-equipped traffic visually and to provide advisory vertical maneuver guidance to avoid traffic. It is the responsibility of the pilot to see and maneuver to avoid traffic, terrain, and obstacles.*

Traffic Symbol	Description
	Non-Threat Traffic (intruder is beyond 5 nm and greater than 1200' vertical separation)
	Proximity Advisory (PA) (intruder is within 5 nm and less than 1200' vertical separation)
	Traffic Advisory (TA) (Potential collision area is within 20 to 48 seconds)
	Traffic Advisory Off Scale
	Resolution Advisory (RA) (Potential collision area is within 15 to 35 seconds)
	Resolution Advisory Off Scale

Traffic Symbol Description

System Test

1) Turn the large **FMS** Knob to select the Map Page Group.
2) Turn the small **FMS** Knob to select the Traffic Map Page.
3) Select the **TEST** Softkey. The aural annunciation "TCAS Test" will be heard. A test pattern of traffic symbols is displayed on the Traffic Page and inset map on the PFD. The VSI will display a red no descent indication and a green climb indication of 2000 feet per min. and red from 2000 to 4000+. The pitch display will also display the appropriate indications

appropriate with the VSI. The self test takes approximately eight seconds to complete, after which a voice alert "TCAS Test Passed" is heard. In the event the system test fails, a voice alert "TCAS Test Failed" is heard and a visual annunciation 'TCAS FAIL' appears on the PFD. In addition, a visual annunciation 'FAIL' appears in the Operating Mode box on the Traffic Map Page.

Displaying Traffic on the Traffic Map Page

1) Turn the large **FMS** Knob to select the Map Page Group.
2) Turn the small **FMS** Knob to select the Traffic Map Page.
3) Select the **TA ONLY** or **TA/RA** Softkey to begin displaying traffic. 'TA/RA' or 'TA ONLY' respectively, is displayed in the TCAS Mode field.
4) Select the **STANDBY** Softkey to place the system in the Standby Mode. 'TFC STBY' will be displayed in the TCAS Mode field.
5) Select the **ABS** (absolute) or **REL** (relative) Softkey to display intruder altitude as an absolute altitude or an altitude relative to own aircraft altitude.
6) Rotate the **Joystick** clockwise to display a larger area or rotate counter-clockwise to display a smaller area.

Changing the Altitude Range

1) On the Traffic Page, select the **ALT RNG** Softkey.
2) Select one of the following Softkeys:

   ABOVE: Displays non-threat and proximity traffic from 9900 feet above the aircraft to 2700 feet below the aircraft. Typically used during climb phase of flight.

   NORMAL: Displays non-threat and proximity traffic from 2700 feet above the aircraft to 2700 feet below the aircraft. Typically used during enroute phase of flight.

   BELOW: Displays non-threat and proximity traffic from 2700 feet above the aircraft to 9900 feet below the aircraft. Typically used during descent phase of flight.

   UNREST (unrestricted)**:** All traffic is displayed.
3) To return to the Traffic Page, select the **BACK** Softkey.

Displaying Traffic on the Navigation Map

1) Ensure TCAS II system is operating. With the Navigation Map displayed, select the **MAP** Softkey.
2) Select the **TRAFFIC** Softkey. Traffic will now be displayed on the map.

TERRAIN AWARENESS & WARNING SYSTEM

TAWS-A (Optional)

WARNING: *The TAWS display shows supplemental information only. It should not be used for navigation.*

NOTE: *Terrain data is not displayed when the aircraft latitude is greater than 75 degrees north or 60 degrees south.*

NOTE: *TAWS operation is only available when the system is configured for a TAWS-A installation.*

Manual System Test

1) While the TAWS-A Page is displayed, press the **MENU** Key.
2) Turn the small **FMS** Knob to select 'Test TAWS System'.
3) Press the **ENT** Key. During the test 'TAWS TEST' is displayed in the center of the TAWS-A Page.

   When all is in working order, "TAWS System Test, OK" is heard.

Displaying the TAWS-A Page

1) Turn the large **FMS** Knob to select the Map Page Group.
2) Turn the small **FMS** Knob to select the TAWS-A Page.
3) If desired, select the **VIEW** Softkey to access the **ARC** and **360** softkeys. When the **ARC** Softkey is selected, a radar-like 120° view is displayed. Select the **360** Softkey to return to the 360° default display.
4) Rotate the **Joystick** clockwise to increase the display range or rotate counter-clockwise to decrease the display range.

Color	Terrain/Obstacle Location
Red	Terrain/Obstacle above or within 100' below current aircraft altitude.
Yellow	Terrain/Obstacle between 100' and 1000' below current aircraft altitude.
Black	Terrain/Obstacle is more than 1000' below aircraft altitude.

Enable/Disable Aviation Data

1) While the TAWS-A Page is displayed, press the **MENU** Key.
2) Turn the small **FMS** Knob to select "Show (or Hide) Aviation Data".
3) Press the **ENT** Key.

Inhibiting/Enabling FLTA and PDA Alerting

1) Select the TAWS-A Page.
2) Press the **TAWS INH** Softkey to inhibit or enable TAWS-A (choice dependent on current state).

Overriding Flaps-based FIT Alerting

1) Select the TAWS-A Page.
2) Press the **FLAP OVR** Softkey.

Inhibiting/Enabling GPWS Alerting

1) Select the TAWS-A Page.
2) Press the **GPWS INH** Softkey to inhibit or enable GPWS alerts (choice dependent on current state).

Inhibiting/Enabling GSD Alerting

NOTE: *Only available during a GSD alert.*

On the PFD, press the **GS INH** or **GP INH** Softkey (only displayed during a GSD alert) to inhibit or enable GSD alerts (softkey choice dependent on present GSD alert type).

TAWS-B

WARNING: *The TAWS display shows supplemental information only. It should not be used for navigation.*

NOTE: *Terrain data is not displayed when the aircraft latitude is greater than 75 degrees north or 60 degrees south.*

NOTE: *TAWS operation is only available when the system is configured for a TAWS-B installation.*

Manual System Test

1) While the TAWS-B Page is displayed, press the **MENU** Key.

2) Turn the small **FMS** Knob to select 'Test TAWS System'.

3) Press the **ENT** Key. During the test 'TAWS TEST' is displayed in the center of the TAWS-B Page.

When all is in working order, "TAWS System Test, OK" is heard.

Display Terrain and Obstacles on the TAWS-B Page

1) Turn the large **FMS** Knob to select the Map Page Group.

2) Turn the small **FMS** Knob to select the TAWS-B Page.

3) If desired, select the **VIEW** Softkey to access the **ARC** and **360** softkeys. When the **ARC** Softkey is selected, a radar-like 120° view is displayed. Select the **360** Softkey to return to the 360° default display.

4) Rotate the **Joystick** clockwise to increase the display range or rotate counter-clockwise to decrease the display range.

Color	Terrain/Obstacle Location
Red	Terrain/Obstacle above or within 100' below current aircraft altitude.
Yellow	Terrain/Obstacle between 100' and 1000' below current aircraft altitude.
Black	Terrain/Obstacle is more than 1000' below aircraft altitude.

Enable/Disable Aviation Data

1) While the TAWS-B Page is displayed, press the **MENU** Key.
2) Turn the small **FMS** Knob to select "Show (or Hide) Aviation Data".
3) Press the **ENT** Key.

TAWS Inhibit

NOTE: *If TAWS alerts are inhibited when the Final Approach Fix is the active waypoint in a GPS SBAS approach, a LOW ALT annunciation may appear on the PFD next to the altimeter if the current aircraft altitude is at least 164 feet below the prescribed altitude at the Final Approach Fix.*

Inhibit TAWS

While the TAWS-B Page is displayed, select the **INHIBIT** Softkey.

Or:

1) Press the **MENU** Key.
2) Turn the small **FMS** Knob to select 'Inhibit TAWS'.
3) Press the **ENT** Key.

Enable TAWS

While the TAWS-B Page is displayed, select the **INHIBIT** Softkey.

Or:

1) While the TAWS-B Page is displayed, press the **MENU** Key.
2) Turn the small **FMS** Knob to select 'Enable TAWS'.
3) Press the **ENT** Key.

Displaying Terrain and Obstacles on the Navigation Map

1) With the Navigation Map displayed, press the **MAP** Softkey.
2) Select the **TERRAIN** Softkey. Terrain and obstacles will now be displayed on the map.

AIRBORNE COLOR WEATHER RADAR

WARNING: *Begin transmitting only when it is safe to do so. If it is desired to transmit while the aircraft is on the ground, no personnel or objects should be within 11 feet of the antenna.*

CAUTION: *In Standby Mode, the antenna is parked at the center line. It is always a good idea to put the radar in Standby Mode before taxiing the aircraft to prevent the antenna from bouncing on the bottom stop and possibly causing damage to the radar assembly.*

Displaying Weather on the Weather Radar Page

1) Turn the large **FMS** Knob to select the Map Page Group.
2) Turn the small **FMS** Knob to select the Weather Radar Page.
3) Select the **MODE** Softkey.
4) If the aircraft is on the ground, select the **STANDBY** Softkey to initiate the one minute warm-up period. After the warm-up is complete, the radar will enter the Standby Mode. After the aircraft is airborne, select the **WEATHER** Softkey.

   Or:

   If the aircraft is already airborne, select the **WEATHER** or **GROUND** Softkey. The one-minute warm-up period will be initiated, after which the radar will begin transmitting. The horizontal scan is initially displayed.
5) Turn the **Joystick** to select the desired range.
6) If desired, select the **VERTICAL** Softkey for vertical scanning.

Adjusting Antenna Tilt

Move the **Joystick** up or down to adjust the tilt of the antenna up or down. Monitor the displayed tilt value in the TILT field.

When scanning vertically, a Tilt Line may be displayed to aid in positioning the tilt of the antenna. If the Tilt Line is not displayed, perform the following steps:

1) Press the **MENU** Key
2) Turn the large **FMS** Knob to select 'Show Tilt Line'.
3) Press the **ENT** Key.

Adjusting Antenna Bearing

Move the **Joystick** right or left to adjust the azimuth position of the antenna right or left. Monitor the displayed bearing value in the BEARING field.

When scanning horizontally, a Bearing Line may be displayed to aid in positioning the antenna for the vertical scan. If the Bearing Line is not displayed, perform the following steps:

1) Press the **MENU** Key
2) Turn the large **FMS** Knob to select 'Show Bearing Line'.
3) Press the **ENT** Key.

Vertically Scan a Storm Cell

1) While in the Horizontal Scan view, move the **Joystick** to place the Bearing Line on the desired storm cell, or other area, to be vertically scanned.
2) Select the **VERTICAL** Softkey. A vertical "slice" of the selected area will now be displayed.
3) Move the **Joystick** right or left to move the scanned "slice" a few degrees right or left.
4) Turn the **Joystick** to adjust the range.
5) To select a new area to be vertically scanned, select the **HORIZON** Softkey to return to the Horizontal Scan view and repeat the previous steps.

Adjusting Gain

WARNING: *Changing the gain in Weather Mode will cause precipitation intensity to be displayed as a color not representative of the true intensity. Remember to return the gain setting to 'Calibrated' for viewing the actual intensity of precipitation.*

1) Select the **GAIN** Softkey to activate the cursor in the 'GAIN' field.
2) Turn the small **FMS** Knob to adjust the gain for the desirable level. The gain setting is visible in the gain field as a movable horizontal bar in a flashing box. The line pointer is a reference depicting the calibrated position.
3) Press the **FMS** Knob to remove the cursor.
4) Select the **GAIN** Softkey again to recalibrate the gain. 'CALIBRATED' will be displayed in the 'GAIN' field.

Ground Mapping

1) Select the **MODE** Softkey.
2) Select the **GROUND** Softkey to place the radar in Ground Map Mode.
3) Select the **BACK** Softkey.

Sector Scan

1) While in the Horizontal Scan Mode, move the **Joystick** right or left to place the Bearing Line in the desired position. The location of the Bearing Line will become the center point of the Sector Scan.
2) Press the **FMS** Knob to display the cursor.
3) Turn the large **FMS** Knob to place the cursor in the SECTOR SCAN field.
4) Turn the small **FMS** Knob to select FULL, 60˚, 40˚, or 20˚ scan.
5) If desired, readjust the Bearing Line with the **Joystick** to change the center of the Sector Scan.
6) Press the **FMS** Knob to remove the cursor.

Antenna Stabilization

1) To activate or deactivate the antenna stabilization, select the **MODE** Softkey.
2) Select the **STAB ON** Softkey to activate antenna stabilization or select the **STAB OFF** Softkey to deactivate. The current stabilization condition is shown in the upper right of the weather radar display.

Weather Attenuated Color Highlight (WATCH®)

To activate or deactivate the WATCH® feature, select the **WATCH** Softkey. This feature is only available in the Horizontal Scan Mode.

Weather Alert

To activate or deactivate Weather Alert, select the **WX ALRT** Softkey. Activating and deactivating will also enable or inhibit the alert on the PFD.

Automatic Standby

When the weather radar system is in the Weather or Ground Map Mode, upon landing the system will automatically switch to Standby Mode.

Blank Page

ADDITIONAL FEATURES

SYNTHETIC VISION (OPTIONAL)

WARNING: *Use appropriate primary systems for navigation, and for terrain, obstacle, and traffic avoidance. SVS is intended as an aid to situational awareness only and may not provide either the accuracy or reliability upon which to solely base decisions and/or plan maneuvers to avoid terrain, obstacles, or traffic.*

Synthetic Vision System (SVS) functionality is offered as an optional enhancement to the Prodigy® Flight Deck 300.

SVS is primarily comprised of a computer-generated forward-looking, attitude aligned view of the topography immediately in front of the aircraft from the pilot's perspective. SVS information is shown on the primary flight display (PFD).

SVS offers a three-dimensional view of terrain and obstacles. Terrain and obstacles that pose a threat to the aircraft in flight are shaded yellow or red.

In addition to SVS enhancement to the PFD, the following feature enhancements have been added to the PFD:

- Pathways
- Flight Path Marker
- Horizon Heading Marks
- Terrain and Obstacle Alerting
- Three-dimensional Traffic
- Airport Signs
- Runway Display

Displaying Synthetic Terrain

1) Press the **PFD** Softkey.
2) Press the **SYN VIS** Softkey.
3) Press the **SYN TERR** Softkey.
4) Press the **BACK** Softkey to return to the previous page.

Displaying Pathways

NOTE: *When the optional TCAS II system issues a Resolution Advisory (RA) Pathways are automatically removed from the display. Pathways may again be displayed by the pilot manually selecting Pathways.*

NOTE: *Pathways are not available when the cross-pointer (X-Pointer) flight director format is selected.*

1) Press the **PFD** Softkey.
2) Press the **SYN VIS** Softkey.
3) If not already enabled, press the **SYN TERR** Softkey.
4) Press the **PATHWAY** Softkey.
5) Press the **BACK** Softkey to return to the previous page.

Displaying Heading on the Horizon

1) Press the **PFD** Softkey.
2) Press the **SYN VIS** Softkey.
3) If not already enabled, press the **SYN TERR** Softkey.
4) Press the **HRZN HDG** Softkey.
5) Press the **BACK** Softkey to return to the previous page.

Displaying Airport Signs

1) Press the **PFD** Softkey.
2) Press the **SYN VIS** Softkey.
3) If not already enabled, press the **SYN TERR** Softkey.
4) Press the **APTSIGNS** Softkey.
5) Press the **BACK** Softkey to return to the previous page.

TERMINAL PROCEDURE CHARTS

NOTE: With the availability of SafeTaxi®, ChartView, or FliteCharts®, it may be necessary to carry another source of charts on-board the aircraft.

SafeTaxi®

SafeTaxi® is an enhanced feature that gives greater map detail as the map range is adjusted in on the airport. The airport display on the map reveals runways with numbers, taxiways identifiers, and airport landmarks including ramps, buildings, control towers, and other prominent features. Resolution is greater at lower map ranges. The aircraft symbol provides situational awareness while taxiing.

Selecting the **DCLTR** Softkey (declutter) once removes the taxiway markings and airport identification labels. Selecting the **DCLTR** Softkey twice removes VOR station ID, the VOR symbol, and intersection names if within the airport plan view. Selecting the **DCLTR** Softkey a third time removes the airport runway layout, unless the airport in view is part of an active route structure. Selecting the **DCLTR** Softkey again cycles back to the original map detail.

The SafeTaxi database contains detailed airport diagrams for selected airports. These diagrams provide the pilot with situational awareness by displaying the aircraft position in relation to taxiways, ramps, runways, terminals, and services. This information should not be used by the pilot as the basis for maneuvering the aircraft on the ground. This database is updated on a 56-day cycle.

ChartView (Optional)

ChartView resembles the paper version of Jeppesen terminal procedures charts. The charts are displayed in full color with high-resolution. The MFD depiction shows the aircraft position on the moving map in the plan view of most approach charts and on airport diagrams.

The ChartView database is updated on a 14-day cycle. If the ChartView database is not updated within 70 days of the expiration date, ChartView will no longer function.

FliteCharts® (Optional)

FliteCharts® resemble the paper version of AeroNav Services terminal procedures charts. The charts are displayed with high-resolution and in color for applicable charts. Current aircraft position is not displayed on FliteCharts.

The FliteCharts database contains procedure charts for the United States only. This database is updated on a 28-day cycle. If not updated within 180 days of the expiration date, FliteCharts will no longer function.

View Charts from the Navigation Map Page

1) Select the **SHW CHRT** Softkey when displayed.

   Or:

   Move the map pointer to point to a desired point on the map and select the **SHW CHRT** Softkey.
2) Select the **DP, STAR, APR, WX,** and **NOTAM** softkeys to access charts for departures, arrivals, approaches, weather and NOTAMs. Note that NOTAMS are only available with ChartView.
3) Select the **GO BACK** Softkey to return to the previous page.

View Charts from the Active Flight Plan Page

1) While viewing the Active Flight Plan Page, press the **FMS** Knob to activate the cursor.
2) Turn the large **FMS** Knob to select the departure airport, destination airport, departure, arrival, or approach.
3) Select the **SHW CHRT** Softkey. The appropriate chart will be displayed, if available for the item selected.
4) Select the **GO BACK** Softkey to return to the previous page.

Change Day/Night View

1) While viewing a chart press the **MENU** Key to display the Page Menu OPTIONS.
2) Turn the large **FMS** Knob to highlight the 'Chart Setup' Menu Option and press the **ENT** Key.
3) Turn the large **FMS** Knob to move between the 'FULL SCREEN' and 'COLOR SCHEME' Options.
4) Turn the small **FMS** Knob to choose between the 'On' and 'Off' Full Screen Options.
5) Turn the small **FMS** Knob to choose between 'Day', 'Auto', and 'Night' Options.

6) In Auto Mode, turn the large **FMS** Knob to select the percentage field and change percentage with the small **FMS** Knob. The percentage of change is the day/night crossover point based on backlighting intensity.

7) Press the **FMS** Knob when finished to remove the Chart Setup Menu.

AIRPORT DIRECTORY

The AOPA or AC-U-KWIK Airport Directory adds enhanced airport information when viewing airports on the WPT-Airport Information Page.

This database is updated four times per year. Check fly.garmin.com for the current database.

View Airport Directory Information

While viewing the WPT-Airport Information Page, if necessary, select the **INFO-1** Softkey to change the softkey label to display **INFO-2**. Airport Directory information is displayed on the right half of the display.

SATELLITE TELEPHONE AND DATA LINK SERVICES

Operation of these features in the cockpit is accomplished through the AUX-TELEPHONE, AUX-TEXT MESSAGING, AUX-REPORT STATUS, and AUX-WI-FI SETUP Pages. For operation using the cabin handset, consult the instructions provided with the handset.

Registering With Garmin Flight Data Services

A subscriber account must be established prior to using the Iridium Satellite System. Before setting up an Iridium account, obtain the serial number of the Iridium Transceiver and the System ID by viewing the AUX- SYSTEM STATUS Page. Contact Garmin Flight Data Services at 1-866-739-5687 in the United States or 913-397-8200, ext. 1135.

Registering the System for Data Link Services

1) With the Prodigy® system connected to the Iridium or Wi-Fi network, turn the large **FMS** Knob on the MFD to select the AUX page group.

2) Turn the small **FMS** Knob to select SYSTEM STATUS. The AUX-SYSTEM STATUS Page is displayed. Note the System ID number in the AIRFRAME field. This number will be needed when contacting Garmin Flight Data Services to establish the account.

3) Select the **LRU** Softkey to activate the cursor in the LRU INFO field. Scroll the view 'GSR1' and note the serial number, which will be needed when contacting Garmin Flight Data Services. When an optional second GSR 56 is installed, scroll to view the serial number for 'GSR2'.
4) Turn the small **FMS** Knob to select REPORTS/DATA LINK.
5) If necessary, select the **REPORTS** Softkey. The AUX-REPORT STATUS Page is now displayed.
6) Press the **MENU** Key. The Page Menu window is now displayed.
7) Select 'Register With GFDS' in the menu list.
8) Press the **ENT** Key. The Garmin Flight Data Service Registration window is now displayed.
9) Enter the Access Code provided by Garmin Flight Data Services.
10) Press the **ENT** Key. REGISTER will now be highlighted.
11) Press the **ENT** Key. System registration is complete when 'REGISTERED' is displayed in the STATUS field. Verify the information displayed in the CURRENT REGISTRATION window is correct.

Disable/Enable Iridium Transceiver

Iridium telephone and data communications may be turned on or off by performing these simple steps.

Disable/Enable Telephone and Low Speed Data Services:

1) Turn the large **FMS** Knob on the MFD to select the AUX page group.
2) Turn the small **FMS** Knob to select REPORTS/DATA LINK.
3) If necessary, select the **REPORTS** Softkey. The AUX-REPORT STATUS Page is now displayed.
4) Press the **MENU** Key. The Page Menu window is now displayed.
5) Turn the **FMS** Knob to select 'Disable Iridium Transmission' in the menu list.
6) Press the **ENT** Key. The Iridium transceiver is now disabled.
7) To enable the Iridium transceiver, repeat steps 1 through 4, then select 'Enable Iridium Transceiver'.

Telephone Communication

The pilot or copilot can place and answer calls on the Iridium satellite network as well as to or from the telephone handset in the cabin. Calls can also be answered or made from the cabin phone, however, only actions initiated from the cockpit phone will be discussed here. See the cabin handset user guide for more information. Control and monitoring of telephone functions are accomplished through the AUX-TELEPHONE Page.

Viewing the Telephone Page

1) Turn the large **FMS** Knob on the MFD to select the AUX page group.

2) Turn the small **FMS** Knob to select SATELLITE PHONE.

3) If necessary, select the **TEL** Softkey to display the AUX-TELEPHONE Page.

Internal Phone	External Phone	Description
		Phone is Idle
		Phone is ringing
		Phone has a dial tone (off hook) or connected to another phone
		Phone dialed is busy
		Phone is dialing another phone
		Phone has failed
		Phone status not known

Internal Phone	External Phone	Description
		Phone is disabled
		Phone is reserved for data transmission
		Calling other phone or incoming call from other phone
		Other phone is on hold
		Phones are connected

Incoming Calls

When viewing MFD pages other than the AUX-TELEPHONE Page, a pop-up alert will be displayed. If the call is from the cabin, CABIN will be displayed. If the incoming call is an Iridium network call, IRIDIUM will be displayed. The pop-up alert may be inhibited at times, such as during takeoff. In addition to the pop-up alert, a ringing phone symbol will be displayed to the right of the MFD page title. Also, the voice alert "Incoming Call" will be heard on the selected cockpit audio.

Answer an Incoming Call in the Cockpit

1) Press the **TEL** Key on the appropriate audio panel.
2) Select the **ANSWER** Softkey on the MFD.

Or:

While viewing the AUX-TELEPHONE Page:

1) Press the **TEL** Key on the appropriate audio panel.
2) Press the **MENU** Key to display the Page Menu.
3) Turn either **FMS** Knob to place the cursor on 'Answer Incoming Call'.
4) Press the **ENT** Key.

Selecting the **IGNORE** Softkey will extinguish the pop-up window and leave the current call unanswered. Selecting the **IGNRE ALL** Softkey will extinguish the pop-up window for the current and all future incoming calls and leave the current call unanswered. Selecting the **TEL** Softkey will display the AUX-TELEPHONE Page allowing additional call information to be viewed before answering.

Disabling Incoming Call Alerts

1) With the AUX-TELEPHONE Page displayed, press the **MENU** Key on the MFD to display the Page Menu.
2) Turn either **FMS** Knob to place the cursor on 'Disable Incoming Call Alerts'.
3) Press the **ENT** Key. The voice and pop-up alert will not be displayed now when an incoming call is received.

Outgoing Calls

Voice calls can be made from the cockpit to the handset in the cabin, or to an external phone through the Iridium Satellite Network.

Make a Call to the Cabin:

1) Press the **TEL** Key on the appropriate audio panel.
2) Select the **DIAL** Softkey on the MFD.
3) Press the **ENT** Key. The cursor will move from 'CABIN' to 'OK'.
4) Press the **ENT** Key again. The cabin phone will now ring.

To exit the call, select the **HANGUP** Softkey.

Make an External Call from the Cockpit

1) Press the **TEL** Key on the appropriate audio panel.
2) Select the **DIAL** Softkey on the MFD.
3) Turn the small **FMS** Knob to select 'IRIDIUM'.
4) Press the **ENT** Key. The cursor has now moved to the phone number entry field.
5) Enter the desired telephone number (country code first) by selecting the number softkeys on the MFD or by pressing the numeric keys on the MFD Control Unit.
6) Press the **ENT** Key. 'OK' is highlighted.
7) Press the **ENT** Key. The system will begin calling the number.

To exit the call, select the **HANGUP** Softkey.

Placing The Cockpit Phone on Hold

Select the **HOLD** Softkey on the MFD.

Or:

1) Press the **MENU** Key to display the Page Menu.
2) Turn either **FMS** Knob to place the cursor on 'Put Current Call On Hold'.
3) Press the **ENT** Key.

Select the **HOLD** Softkey again to resume the call.

Transferring a Call from the Cockpit

From the cockpit phone, an external call can be transferred to the cabin phone, or a call with the cabin phone can be transferred to an external phone, or (when two Iridium Transceivers are installed) an external call can be transferred to another external phone.

To transfer a call:

1) Select the **TRANS** Softkey on the MFD.

   Or:

   a) Press the **MENU** Key to display the Page Menu.
   b) Turn either **FMS** Knob to place the cursor on 'Transfer Current Call'.
   c) Press the **ENT** Key.

2) Press the **ENT** Key. The cursor now highlights the phone number entry field.
3) Enter the phone number as discussed earlier for making an external call on the Iridium satellite network.
4) Press the **ENT** Key. 'OK' is now highlighted.
5) Press the **ENT** Key again to place the call.

Making a Conference Call from the Cockpit

1) Select the **CONF** Softkey on the MFD.

   Or:

   a) Press the **MENU** Key to display the Page Menu.
   b) Turn either **FMS** Knob to place the cursor on 'Conference Current Call'.
   c) Press the **ENT** Key.

2) Press the **ENT** Key. The cursor now highlights the phone number entry field.
3) Enter the phone number as discussed earlier for making an external call on the Iridium satellite network.
4) Press the **ENT** Key. 'OK' is now highlighted.
5) Press the **ENT** Key again to place the call.

Text Messaging (SMS)

Messages may be sent to an email address or text message capable cellular telephone. Message length is limited to 160 characters, including the email address.

The text messaging user interface is mainly through the AUX-TEXT MESSAGING Page.

Viewing the Text Messaging Page

1) Turn the large **FMS** Knob on the MFD to select the AUX page group.
2) Turn the small **FMS** Knob to select SATELLITE PHONE.
3) If necessary, select the **SMS** Softkey to display the AUX-TEXT MESSAGING Page.

Message Symbol	Description
	Received text message that has not been opened
	Received text message that has been opened
	Saved text message, draft not sent
	System is sending text message
	Text message has been sent

Message Symbol	Description
	System failed to send text message
	Predefined text message

Viewing a Text Message When Received

When viewing MFD pages other than the AUX-TEXT MESSAGING Page, a pop-up alert will be displayed when a new text message is received.

Select the **VIEW** Softkey to view the message. Selecting the **IGNORE** Softkey will extinguish the pop-up window and leave the text message unopened. Selecting the **IGNR ALL** Softkey will extinguish the pop-window and ignore all future incoming text messages. Selecting the **SMS** Softkey will display the AUX-TEXT MESSAGING Page.

The pop-up alerts may be enabled or disabled through the Page Menu.

Enable/Disable Incoming Text Message Pop-Up Alerts

1) With the AUX-TEXT MESSAGING Page displayed, press the **MENU** Key on the MFD to display the Page Menu.
2) Turn either **FMS** Knob to place the cursor on 'Disable New Message Popups' or 'Enable New Message Popups'.
3) Press the **ENT** Key. The pop-up alert will not be displayed when an incoming text message is received.

Reply to a Text Message

While viewing the text message, select the **REPLY** Softkey.

Or:

a) Press the **MENU** Key to display the Page Menu.
b) Turn either **FMS** Knob to place the cursor on 'Reply To Message'.
c) Press the **ENT** Key.

Sending a Text Message

1) While viewing the AUX-TEXT MESSAGING Page, select the **NEW** Softkey.

   Or:

   a) Press the **MENU** Key to display the Page Menu.

   b) Turn either **FMS** Knob to place the cursor on 'Draft New Message'.

   c) Press the **ENT** Key.

2) The TEXT MESSAGE DRAFT Window is now displayed with the cursor in the 'TO' field. Enter the desired telephone number or email address. Entry can be accomplished through the alphanumeric keys on the MFD Controller, or combination of the **FMS** Knob on the controller and softkeys on the MFD. The **FMS** Knob is used to enter letters and numbers, or numbers can be entered from the MFD by selecting the **NUMBERS** Softkey. Select the **CAP LOCK** Softkey to create upper and lower case alpha characters. Special characters can be accessed by selecting the **SYMBOLS** Softkey.

3) Press the **ENT** Key. The cursor is now displayed in the 'MESSAGE' field.

4) Enter the desired message using any combination of entry methods as described in step 2.

5) Press the **ENT** Key.

6) Select the **SEND** Softkey to send the message immediately, or select the **SAVE** Softkey to save the message in Outbox for sending at a later time. Select the **CANCEL** Softkey to delete the message.

Predefined Text Messages

Time and effort can be saved in typing text messages that are used repeatedly by saving these messages as a predefined message.

Create a Predefined Text Message

1) While viewing the AUX-TEXT MESSAGING Page, press the **MENU** Key to display the Page Menu.

2) Turn either **FMS** Knob to select 'Edit Predefined Messages'.

3) Press the **ENT** Key. The PREDEFINED MESSSAGES view is now displayed.

4) Select the **NEW** Softkey.

   Or:

a) Press the **MENU** Key to display the Page Menu.

b) Turn either **FMS** Knob to place the cursor on 'Draft New Predefined Message'.

c) Press the **ENT** Key. The PREDEFINED SMS TEXT MESSAGE Window is now displayed.

5) The cursor is displayed in the 'TITLE' field. Enter the desired message title. Entry can be accomplished through the alphanumeric keys on the MFD Controller, or combination of the **FMS** Knob on the controller and softkeys on the MFD. The **FMS** Knob is used to enter letters and numbers, or numbers can be entered from the MFD by selecting the **NUMBERS** Softkey. Select the **CAP LOCK** Softkey to create upper and lower case alpha characters. Special characters can be accessed by selecting the **SYMBOLS** Softkey.

6) Press the **ENT** Key. The cursor is now displayed in the 'MESSAGE' field.

7) Enter the desired message using any combination of entry methods as described in step 5.

8) Press the **ENT** Key.

9) Select the **SAVE** Softkey. The new predefined message is now shown in the displayed list. Selecting the **CANCEL** Softkey will delete the message without saving.

10) Press the **MENU** Key to display the Page Menu.

11) Turn either **FMS** Knob to place the cursor on 'Stop Editing Predefined Message'.

12) Press the **ENT** Key.

Send a Predefined Text Message

1) While viewing the AUX-TEXT MESSAGING Page, select the **NEW** Softkey.

2) The TEXT MESSAGE DRAFT Window is now displayed with the cursor in the 'TO' field. Enter the desired telephone number or email address. Entry can be accomplished through the alphanumeric keys on the MFD Controller, or combination of the **FMS** Knob on the controller and softkeys on the MFD. The **FMS** Knob is used to enter letters and numbers, or numbers can be entered from the MFD by selecting the **NUMBERS** Softkey. Select the **CAP LOCK** Softkey to create upper and lower case alpha characters. Special characters can be accessed by selecting the **SYMBOLS** Softkey.

3) Press the **ENT** Key. The cursor is now displayed in the 'MESSAGE' field.

4) Select the **PREDEFD** Softkey. The PREDEFINED MESSAGE MENU Window is displayed.

6) Press the **ENT** Key. The predefined message text is inserted into the message field. If desired, the message can be edited by using the FMS Knobs.

7) Press the **ENT** Key.

8) Select the **SEND** Softkey to transmit the message.

Text Message Boxes

Received text messages reside in the Inbox as 'Read' or 'Unread' messages. The Outbox contains 'Sent" and 'Unsent' text messages. Saved messages that are meant to be sent later are stored as Drafts. Each text message box may be viewed separately, or together in any combination.

Show Inbox Messages

While viewing the AUX-TEXT MESSAGING Page, select the **ARRANGE** Softkey, then select the **INBOX** Softkey.

Or:

a) Press the **MENU** Key to display the Page Menu.

b) Turn either **FMS** Knob to place the cursor on 'Show Inbox Messages'.

c) Press the **ENT** Key. The message box selected for viewing is indicated at the bottom left of the list window.

Show Outbox Messages

While viewing the AUX-TEXT MESSAGING Page, select the **ARRANGE** Softkey, then select the **OUTBOX** Softkey.

Or:

a) Press the **MENU** Key to display the Page Menu.

b) Turn either **FMS** Knob to place the cursor on 'Show Outbox Messages'.

c) Press the **ENT** Key. The message box selected for viewing is indicated at the bottom left of the list window.

Show Draft Messages

While viewing the AUX-TEXT MESSAGING Page, select the **ARRANGE** Softkey, then select the **DRAFTS** Softkey.

Or:

a) Press the **MENU** Key to display the Page Menu.

b) Turn either **FMS** Knob to place the cursor on 'Show Draft Messages'.

c) Press the **ENT** Key. The message box selected for viewing is indicated at the bottom left of the list window.

Arranging Text Messages

The viewed messages may be listed according to the date/time the message was sent or received, the type of message (read, unread, sent, unsent, etc.), or by message address.

View Messages Sorted by Message Date/Time:

While viewing the AUX-TEXT MESSAGING Page, select the **ARRANGE** Softkey, then select the **TIME** Softkey.

Or:

a) Press the **MENU** Key to display the Page Menu.

b) Turn either **FMS** Knob to place the cursor on 'Sort By Date/Time'.

c) Press the **ENT** Key. The sorting selection is indicated at the bottom center of the list window.

View Messages Sorted by Message Type

While viewing the AUX-TEXT MESSAGING Page, select the **ARRANGE** Softkey, then select the **TYPE** Softkey.

Or:

a) Press the **MENU** Key to display the Page Menu.

b) Turn either **FMS** Knob to place the cursor on 'Sort By Type'.

c) Press the **ENT** Key. The sorting selection is indicated at the bottom center of the list window.

View Messages Sorted by Address:

While viewing the AUX-TEXT MESSAGING Page, select the **ARRANGE** Softkey, then select the **ADDRESS** Softkey.

Or:

a) Press the **MENU** Key to display the Page Menu.

b) Turn either **FMS** Knob to place the cursor on 'Sort By Address'.

c) Press the **ENT** Key. The sorting selection is indicated at the bottom center of the list window.

Viewing The Content of a Text Message

1) While viewing the AUX-TEXT MESSAGING Page, select the desired message box.

2) Press the **FMS** Knob to activate the cursor.

3) Turn either **FMS** Knob to select the desired message.

4) Select the **VIEW** Softkey.

Or:

Press the **ENT** Key.

Or:

a) Press the **MENU** Key to display the Page Menu.

b) Turn either **FMS** Knob to place the cursor on 'View Selected Message'.

c) Press the **ENT** Key.

5) To close the text message, select the **CLOSE** Softkey.

Or:

a) Press the **MENU** Key to display the Page Menu.

b) Turn either **FMS** Knob to place the cursor on 'Close Message'.

c) Press the **ENT** Key.

Mark Selected Message As Read

1) While viewing the Inbox on the AUX-TEXT MESSAGING Page, press the **FMS** Knob to activate the cursor.

2) Turn either **FMS** Knob to select the desired message.

3) Select the **MRK READ** Softkey.

Or:

a) Press the **MENU** Key to display the Page Menu.

b) Turn either **FMS** Knob to place the cursor on 'Mark Selected Message As Read'.

c) Press the **ENT** Key.

The message symbol now indicates the message has been opened.

Mark All Messages As Read

1) While viewing the Inbox on the AUX-TEXT MESSAGING Page, press the **MENU** Key to display the Page Menu.
2) Turn either **FMS** Knob to place the cursor on 'Mark All New Messages As Read'.
3) Press the **ENT** Key. A confirmation window is displayed.
4) With cursor highlighting 'YES', press the **ENT** Key. The message symbols now indicate all the message have been opened.

Delete a Message

1) While viewing the Inbox on the AUX-TEXT MESSAGING Page, press the **FMS** Knob to activate the cursor.
2) Turn either **FMS** Knob to select the desired message.
3) Select the **DELETE** Softkey.

Or:

a) Press the **MENU** Key to display the Page Menu.

b) Turn either **FMS** Knob to place the cursor on 'Delete Selected Message'.

c) Press the **ENT** Key.

WI-FI CONNECTIONS (OPTIONAL)

Control and monitoring of Wi-Fi functions are accomplished through the AUX-WI-FI SETUP Page.

Viewing the Wi-Fi Setup Page

1) Turn the large **FMS** Knob on the MFD to select the AUX page group.
2) Turn the small **FMS** Knob to select REPORTS/DATA LINK.
3) If necessary, select the **WI-FI** Softkey to display the AUX-WI-FI SETUP Page.

Setting Up a New Wi-Fi Connection

1) Select the **AVAIL** Softkey on the MFD. A list of available networks will be displayed in the AVAILABLE NETWORKS window. Signal strength is shown for each network, as well as security methods and whether the network has been saved in the system's memory.

2) If necessary, select the **RESCAN** Softkey to have the system scan again for available networks.

3) Press the **FMS** Knob to place the cursor in the list of networks.

4) Turn either **FMS** Knob to select the desired network.

5) Select the **CONNECT** Softkey.

6) If the network is secured, enter the necessary passcode. Use the **FMS** Knobs to enter the desired alpha numeric characters. Select the **CAP LOCK** Softkey to enter upper case letters. If there is no security associated with the network, proceed to step 9.

7) Press the **ENT** Key. 'OK' will be highlighted.

8) Press the **ENT** Key again.

9) The SAVE SETTINGS window is now displayed with the cursor highlighting 'SAVE CONNECTION'.

10) The selected network can be saved to system memory to make reconnection easier at a later time.

To connect the selected network without saving:

a) Turn the large FMS Knob to move the cursor to highlight 'CONNECT'.

b) Press the **ENT** Key.

To save and connect the selected network:

a) Press the **ENT** Key. A checkmark is placed in the checkbox and the cursor moves to the airport field.

b) Using the **FMS** Knobs, enter an airport identifier to be associated with the saved network. This aids in identifying the network later in the event of duplicate network names.

c) Press the **ENT** Key. The cursor moves to 'CONNECT'.

d) Press the **ENT** Key again to connect to the selected network.

Editing a Saved Network

1) While viewing list of saved networks, press the **FMS** Knob to activate the cursor.
2) Turn either **FMS** Knob to highlight the network to be edited.
3) Pressing the **ENT** Key at this point will check or uncheck the AUTO CONNECT checkbox. When a checkmark is present, the system will automatically connect to the network when within range.
4) Select the **EDIT** Softkey. The cursor now appears in the CONNECTION SETTINGS window.
5) Turn the large **FMS** Knob to select the network attribute to be edited.
6) Turn the small **FMS** Knob to begin editing the field.
7) When the entry is complete, press the **ENT** Key.
8) Turn the large **FMS** Knob or press the **ENT** Key until 'SAVE' is highlighted.
9) Press the **ENT** Key.

Disconnecting a Wi-Fi Network

Select the **DISCNCT** Softkey.

Deleting a Saved Wi-Fi Network

1) While viewing the list of saved networks, press the **FMS** Knob to activate the cursor.
2) Turn either **FMS** Knob to highlight the network to be deleted.
3) Select the **DELETE** Softkey. The selected network is removed from the list.

SYSTEM DATA LOGGING (OPTIONAL)

NOTE: *An account must be established with Garmin Flight Data Services to make full use of the System Data Logging feature.*

Control and monitoring of report transmissions is accomplished through the AUX-REPORT STATUS Page.

Viewing the Report Status Page

1) Turn the large **FMS** Knob on the MFD to select the AUX page group.
2) Turn the small **FMS** Knob to select REPORTS/DATA LINK.
3) If necessary, select the **REPORT** Softkey to display the AUX-REPORT STATUS Page.

Changing the Transmission Method

1) While viewing the Report Status Page, press the **FMS** Knob to activate the cursor.
2) Turn the large **FMS** Knob to move the cursor to the 1st or 2nd transmit method for the desired data report.
3) Turn the small **FMS** Knob to select the desired option (SAT SHORT BURST, SAT RUDICS, WI-FI, or NONE). Sat Short Burst is generally used for transmission of data packets less than 300 bytes. Wi-Fi is used only when the aircraft on the ground and the system is connected to a Wi-Fi network.
4) Press the **ENT** Key.

Enabling/disabling Automatic Send for Automatic Test Reports

1) While viewing the Report Status Page, press the **FMS** Knob to activate the cursor.
2) Turn the large **FMS** Knob to move the cursor to the AUTOMATIC SEND field.
3) Turn the small **FMS** Knob to select ENABLED or DISABLED.
4) Press the **ENT** Key.

Enabling/disabling Periodic Send for Periodic Test Reports

1) While viewing the Report Status Page, press the **FMS** Knob to activate the cursor.
2) Turn the large **FMS** Knob to move the cursor to the PERIODIC SEND field.
3) Turn the small **FMS** Knob to select ENABLED or DISABLED.
4) Press the **ENT** Key.

Sending a Transmission Manually

NOTE: *Manual transmission of data can only be performed while the aircraft is on the ground.*

1) While viewing the Report Status Page, press the **FMS** Knob to activate the cursor.
2) Turn the large **FMS** Knob to move the cursor to the send button on the desired data report.
3) Press the **ENT** Key.

Restore Reports Page Options to Default Settings

1) While viewing the Report Status Page, press the **MENU** Key.
2) Turn the **FMS** Knob to select 'Restore Defaults' in the menu list.
3) Press the **ENT** Key.
4) A confirmation window is now displayed.
5) Turn the large **FMS** Knob to select 'YES' or 'NO'.
6) With 'YES' highlighted, press the **ENT** Key.

SIRIUSXM SATELLITE RADIO ENTERTAINMENT (SUBSCRIPTION OPTIONAL)

The XM Radio Page provides information and control of the audio entertainment features of the SiriusXM Satellite Radio.

Selecting the XM Radio Page

1) Turn the large **FMS** Knob to select the AUX Page Group.
2) Turn the small **FMS** Knob to select XM RADIO.
3) Select the **RADIO** Softkey to show the XM Radio Page where audio entertainment is controlled.

Active Channel and Channel List

The Active Channel Box on the XM Radio Page displays the currently selected channel. The Channels List Box of the XM Radio Page shows a list of the available channels for the selected category.

Selecting a Category

The Category Box of the XM Radio Page displays the currently selected category of audio.

1) Select the **CATGRY** Softkey on the XM Radio Page.
2) Select the **CAT +** and **CAT -** softkeys to cycle through the categories.

   Or:

   Turn the small **FMS** Knob to display the 'Categories' list. Highlight the desired category with the small **FMS** Knob.
3) Press the **ENT** Key.

Select an Available Channel within the Selected Category

1) While on the XM Radio Page, select the **CHNL** Softkey.
2) Select the **CH +** Softkey to go down through the list in the Channel Box, or move up the list with the **CH –** Softkey.

   Or:

   Press the **FMS** Knob to highlight the channel list and turn the large **FMS** Knob to scroll through the channels.
3) With the desired channel highlighted, press the **ENT** Key.

Entering a Channel Directly

1) While on the XM Radio Page, select the **CHNL** Softkey.
2) Select the **DIR CH** Softkey. The channel number in the Active Channel Box is highlighted.
3) Select the numbered softkeys located on the bottom of the display to directly select the desired channel number.
4) Press the **ENT** Key to activate the selected channel.

Assigning Channel Presets

Up to 15 channels from any category can be assigned a preset number.

1) On the XM Radio Page, with the desired channel active, select the **PRESETS** Softkey to access the first five preset channels (**PS1 - PS5**).
2) Select the **MORE** Softkey to access the next five channels (**PS6 – PS10**), and again to access the last five channels (**PS11 – PS15**). Selecting the **MORE** Softkey repeatedly cycles through the preset channels.
3) Select the **SET** Softkey.
4) Select any one of the (**PS1 - PS15**) softkeys to assign a number to the active channel.

Adjusting Volume

1) With the XM Radio Page displayed, press the **VOL** Softkey.
2) Press the **VOL –** Softkey to reduce volume or press the **VOL +** Softkey to increase volume. (Once the **VOL** Softkey is pressed, the volume can also be adjusted using the small **FMS** Knob.)

Mute SiriusXM Audio

1) Select the XM Radio Page or XM Information Page.
2) Press the **MUTE** Softkey to mute the audio. Press the **MUTE** Softkey again to unmute the audio.

ELECTRONIC CHECKLISTS (OPTIONAL)

The system accesses the checklists from an SD card inserted into the card slot. If the SD card contains an invalid checklist file or no checklist, the Power-up Page messages display 'Checklist File: Invalid' or 'Checklist File: N/A' (not available) and the **CHKLIST** Softkey is not available.

The following colors are used for checklist items:

- Light Blue - Items not selected or checked
- White - Item is selected
- Green - Item has been checked
- Gray - General notes
- Yellow - Caution notes
- Red - Warning notes

Accessing and Navigating Checklists

1) From any page on the MFD, select the **CHKLIST** Softkey or turn the large **FMS** Knob to select the Checklist Page.

2) Turn the large **FMS** Knob to select the 'GROUP' field.

3) Turn the small **FMS** Knob to select the desired procedure and press the **ENT** Key.

4) Turn the large **FMS** Knob to select the 'CHECKLIST' field.

5) Turn the small **FMS** Knob to select the desired checklist and press the **ENT** Key. The selected checklist item is indicated with white text surrounded by a white box.

6) Press the **ENT** Key or select the **CHECK** Softkey to check the selected checklist item. The line item turns green and a checkmark is placed in the associated box. The next line item is automatically selected for checking.

Either **FMS** Knob can be used to scroll through the checklist and select the desired checklist item.

Press the **CLR** Key or select the **UNCHECK** Softkey to remove a check mark from an item.

7) When all checklist items have been checked, '*Checklist Finished*' is displayed in green text at the bottom left of the checklist window and 'GO TO NEXT CHECKLIST?' is highlighted. If 'GO TO NEXT CHECKLIST?' is selected prior to checking all the checklist items, '*CHECKLIST NOT FINISHED*' will be displayed in yellow text.

8) Press the **ENT** Key. If 'GO TO NEXT CHECKLIST?' is displayed when pressing the **ENT** Key, the next checklist in the group will be displayed. If 'EXIT CHECKLISTS?' is displayed when pressing the **ENT** Key, the system will exit the Checklist Page.

9) Select the **EXIT** Softkey to exit the Checklist Page and return to the page last viewed. When returning to the Checklist Page after pressing the **EXIT** Softkey, the system will return to the last selected checklist item.

Immediately Accessing Emergency Procedures

1) From any page on the MFD, select the **CHKLIST** Softkey or turn the large **FMS** Knob to select the Checklist Page.

2) Select the **EMERGCY** Softkey.

3) Turn the **FMS** Knob to select the desired emergency checklist and press the **ENT** Key.

4) Press the **ENT** Key or select the **CHECK** Softkey to check the selected emergency checklist item. The line item turns green and a checkmark is placed in the box next to it. The next line item is automatically highlighted for checking.

   Either **FMS** Knob can be used to scroll through the checklist and select the desired checklist item.

   Press the **CLR** Key or select the **UNCHECK** Softkey to remove a check mark from an item.

5) When all checklist items have been checked, '*Checklist Finished*' is displayed in green text at the bottom left of the checklist window and 'GO TO NEXT CHECKLIST?' is highlighted. If 'GO TO NEXT CHECKLIST?' is selected prior to checking all the checklist items, '*CHECKLIST NOT FINISHED*' will be displayed in yellow text.

6) Press the **ENT** Key to advance to the next checklist.

7) Select the **RETURN** Softkey to return to the previous checklist.

8) Select the **EXIT** Softkey to exit the Checklist Page and return to the page last viewed.

PILOT PROFILES

When the system is powered on, the last selected pilot profile is shown on the MFD power-up screen. The system can store up to 25 profiles; the currently active profile, the amount of memory used, and the amount of memory available are shown at the top of the AUX - System Setup Page in the box labeled 'Pilot Profile'.

Creating a Profile

1) Use the **FMS** Knob to select the AUX - System Setup Page.
2) Press the **FMS** Knob momentarily to activate the flashing cursor.
3) Turn the large **FMS** Knob to highlight 'CREATE' in the Pilot Profile Box.
4) Press the **ENT** Key. A 'Create Profile' window is displayed.
5) Use the **FMS** Knob to enter a profile name up to 16 characters long and press the **ENT** Key. Pilot profile names cannot begin with a blank as the first letter.
6) In the next field, use the small **FMS** Knob to select the desired settings upon which to base the new profile. Profiles can be created based on Garmin factory defaults, default profile settings (initially based on Garmin factory defaults unless edited by the pilot), or current system settings.
7) Press the **ENT** Key.
8) With 'CREATE' highlighted, press the **ENT** Key to create the profile.

   Or:

   Use the large **FMS** Knob to select 'CREATE and ACTIVATE' and press the **ENT** Key to activate the new profile.
9) To cancel the process, select 'CANCEL' with the large **FMS** Knob and press the **ENT** Key.
10) Press the **FMS** Knob to deactivate the cursor.

Selecting an Active Profile

1) Use the **FMS** Knob to select the AUX - System Setup Page.
2) Press the **FMS** Knob momentarily to activate the flashing cursor.
3) Turn the large **FMS** Knob to highlight the active profile field in the Pilot Profile Box.

4) Turn the small **FMS** Knob to display the pilot profile list and highlight the desired profile.

5) Press the **ENT** Key. The system loads and displays the system settings for the selected profile.

6) Press the **FMS** Knob to deactivate the cursor.

Renaming a Profile

1) Use the **FMS** Knob to select the AUX - System Setup Page.
2) Press the **FMS** Knob momentarily to activate the flashing cursor.
3) Turn the large **FMS** Knob to highlight 'RENAME' in the Pilot Profile Box.
4) Press the **ENT** Key.
5) In the 'Rename Profile' window, turn the **FMS** Knob to select the profile to rename.
6) Press the **ENT** Key.
7) Use the **FMS** Knob to enter a new profile name up to 16 characters long and press the **ENT** Key.
8) With 'RENAME' highlighted, press the **ENT** Key.
9) To cancel the process, use the large **FMS** Knob to select 'CANCEL' and press the **ENT** Key.
10) Press the **FMS** Knob to deactivate the cursor.

Deleting a Profile

NOTE: *The profile that is currently active cannot be deleted. If this is the desired profile to delete, select another profile, then delete the desired profile.*

1) Use the **FMS** Knob to select the AUX - System Setup Page.
2) Press the **FMS** Knob momentarily to activate the flashing cursor.
3) Turn the large **FMS** Knob to highlight 'DELETE' in the Pilot Profile Box.
4) Press the **ENT** Key.
5) In the 'Delete Profile' window, turn the **FMS** Knob to select the profile to delete.

6) Press the **ENT** Key.
7) With 'DELETE' highlighted, press the **ENT** Key.
8) To cancel the process, use the large **FMS** Knob to select 'CANCEL' and press the **ENT** Key.
9) Press the **FMS** Knob to deactivate the cursor.

Importing a Profile from an SD Card

1) Insert an SD card containing the pilot profile(s) into the top card slot on the MFD.
2) Turn the **FMS** Knob to select the AUX - System Setup Page.
3) Select the **IMPORT** Softkey.
4) The system displays the Pilot Profile Importing Window with 'IMPORT' highlighted. To change the selected profile to be imported from the SD card (shown as 'SELECT FILE'), turn the large FMS Knob to highlight the profile file name, then turn the small **FMS** Knob to highlight a profile from the list, and press the **ENT** Key.
5) If desired, the profile name to be used after profile has been imported can be changed by turning the **FMS** Knob to highlight the 'PROFILE NAME' field, then use the large and small **FMS** Knobs to enter the name, and press the **ENT** Key. Imported profile names cannot begin with a blank space or be named 'DEFAULT', 'GARMIN DEFAULTS' or 'DEFAULT SETTINGS'.
6) With 'IMPORT' highlighted, press the **ENT** Key.
7) If the imported profile name is the same as an existing profile on the system, the system displays an 'Overwrite existing file? OK or CANCEL' prompt. Press the **ENT** Key to replace profile on the system with the profile imported from the SD card, or turn the **FMS** Knob to highlight 'CANCEL' and press the **ENT** Key to return to the Pilot Profile Importing Window.
8) If successful, the system displays 'Pilot profile import succeeded.' in the IMPORT RESULTS window below. With 'OK' highlighted, press the **ENT** or **CLR** Keys or press the **FMS** Knob to return to the AUX - System Setup Page. The imported profile becomes the active profile.

Exporting a Profile to an SD Card

1) Insert the SD card for storing the Pilot Profile into the top card slot on the MFD.

2) Turn the **FMS** Knob to select the AUX - System Setup Page.

3) If necessary, activate the desired pilot profile to export. Only the currently active Pilot Profile can be exported.

4) Select the **EXPORT** Softkey. The system displays the Pilot Profile Exporting Window.

5) To export the pilot profile using the current supplied name, press the **ENT** Key with 'EXPORT' highlighted. To change the profile file name turn the large **FMS** Knob to highlight the 'SELECT FILE' field, then enter the new name with the large and small FMS Knobs, then press the **ENT** Key. Then press the **ENT** Key with 'EXPORT' highlighted.

6) If the profile name to be exported is the same as an existing profile file name on the SD card, the system displays an 'Overwrite existing file? OK or CANCEL' prompt. Press the **ENT** Key to replace the profile on the SD card with the profile to be exported, or turn the FMS Knob to highlight 'CANCEL' and press the **ENT** Key to return to the Pilot Profile Exporting Window without exporting the profile.

7) If successful, the EXPORT RESULTS window displays 'Pilot profile export succeeded.' With 'OK' highlighted, press the **ENT** or **CLR** Keys, or press the **FMS** Knob to return to the AUX - System Setup Page.

ABNORMAL OPERATION

NOTE: *The Embraer Phenom 300 Airplane Flight Manual (AFM) always takes precedence over the information found in this section.*

ENGINE

When an engine failure occurs, besides the CAS message corresponding to the failed engine ("E1 FAIL" or "E2 FAIL"), the corresponding N1 gauge displays the annunciation "FAIL" in yellow inverse video (black text on yellow background). Detection of an engine fire causes the red inverse video (white text on red background) annunciation "FIRE" to be displayed over the ITT gauge.

Engine Failure Indication

Engine Fire Indication

CABIN PRESSURIZATION

If the cabin altitude (ALT) reaches a caution level, the readout displays black text on a yellow background. When a high cabin altitude warning occurs, the readout is displayed with white text on a red background, and the corresponding CAS message "CAB ALTITUDE HI" is issued.

A cabin pressure change rate (RATE) caution readout is indicated with black text on a yellow background. If low flow or a cabin leak is detected, the cabin pressure change rate readout displays white text on a red background and the trend arrow turns red.



Cabin Leak Indication

Excessive cabin differential pressure (DELTA-P) causes the pressure readout to display a yellow background and black text; warnings are indicated with red background with white readout text. The CAS message "CAB DELTA-P FAIL" accompanies this condition.

Low oxygen system pressure (OXY) is indicated by a yellow background and black text. The CAS message "OXY LO PRES" is also issued.

If the pilot selected landing field elevation (LFE) differs by more than five feet from the FMS LFE value, the LFE readout is shown as black text with a yellow background for 30 seconds.

A red "X" is displayed in place of any readout on the Cabin Display that is invalid or out of range.

FLAPS

The following denote abnormal flap conditions:

- Flaps not in position for takeoff – Flap pointer turns red and readout turns red inverse video (white text on red background) (A and B).
- Flaps have failed or become jammed – Flap pointer turns yellow and readout turns yellow inverse video (black text on yellow background) (C)
- Flaps unavailable – Flap pointer is removed and readout turns light blue inverse video (black text on light blue background) (D)
- Flaps position data invalid – Flap pointer and readout displayed with a red "X"



A - Flaps Retracted at Takeoff



B - Flaps at FULL (Landing) Position at Takeoff



C - Flaps Failed

D - Flaps Unavailable

TRIM

Aileron or rudder mistrim are denoted with yellow arrows pointing in the direction of mistrim on the Roll and Yaw Trim indicators (A).

If takeoff configuration has been selected and the pitch trim position is not within the green band on the pitch trim scale, the pointer turns red and readout turns red inverse video (white text on red background) (B).

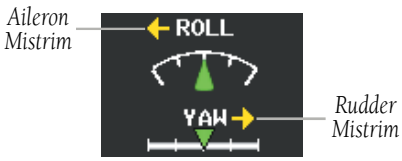

A - Mistrim

B - Pitch Trim Outside Takeoff Configuration

REVERSIONARY MODE

If the system detects a failure in PFD1 or MFD, reversionary mode is entered automatically. Reversionary mode must be entered manually in the case of PFD2 failure. In reversionary mode, critical flight instrumentation is combined with engine instrumentation on the remaining display.

Manual activation of reversionary display mode is accomplished by pressing the **DISPLAY BACKUP** Button on the appropriate audio panel.

- **PFD1** – By pressing the **DISPLAY BACKUP** Button on the left audio panel.
- **MFD** – By pressing the **DISPLAY BACKUP** Button on the left or the right audio panel.
- **PFD2** – By pressing the **DISPLAY BACKUP** Button on the right audio panel.

ABNORMAL COM OPERATION

When a COM tuning failure is detected by the system, the emergency frequency (121.500 MHz) is automatically loaded into the active frequency field of the COM radio for which the tuning failure was detected. In the event of a failure of both PFDs, the emergency frequency (121.500 MHz) automatically becomes the active frequency on both COM radios.

AUDIO PANEL FAIL-SAFE OPERATION

If there is a failure of both Audio Panels, a fail-safe circuit connects the pilot's headset and microphone directly to the COM1 transceiver and the copilot's headset directly to the COM2 transceiver. Audio is not available on the speakers. If there is a failure of one Audio Panel, that side only has access to their respective on-side fail-safe COM.

NOTE: *Audio is not available on the speakers in case of an Audio Panel and its cross-side GIA unit simultaneous failure.*

If there is a failure of one Audio Panel, the remaining Audio Panel does not have access to the other side's COM or NAV. For example, if the pilot side Audio Panel fails, the copilot side Audio Panel has access to all the radios except for COM1 and NAV1. In this case, the copilot can receive the audio from NAV2 and operate COM2 for transmission/reception.

In addition, if there is a failure of one Audio Panel, the following functions are no longer available on the failed side; NAV/ILS audio, speaker, cockpit/cockpit-passengers intercom, aural warning alerts on headset, entertainment inputs, and digital recording radio. Also, if a stereo headset is in use, and an Audio Panel fails, only the left channel will be heard in the headphones.

HAZARD DISPLAYS WITH LOSS OF GPS POSITION

If GPS position is lost, or becomes invalid, selected hazards being displayed on the Navigation Map Page are removed until GPS position is again established.

Loss of Hazard Functions with Loss of GPS Position

UNUSUAL ATTITUDES

The PFD 'declutters' when the aircraft enters an unusual attitude. Only the primary functions are displayed in these situations.

The following information is removed from the PFD (and corresponding softkeys are disabled) when the aircraft experiences unusual attitudes:

- Traffic Annunciations
- AFCS Annunciations
- Flight Director Command Bars
- Inset Map
- Temperatures
- DME Information Window
- Wind Data
- Selected Heading Box
- Selected Course Box
- Transponder Status Box
- System Time
- PFD Setup Menu
- Windows displayed in the lower right corner of the PFD:
  - Timer/References
  - Nearest Airports
  - Flight Plan
  - Messages
  - Procedures
  - ADF/DME Tuning
- Barometric Minimum Descent Altitude Box
- Glideslope, Glidepath, and Vertical Deviation Indicators
- Altimeter Barometric Setting
- Selected Altitude
- VNV Target Altitude

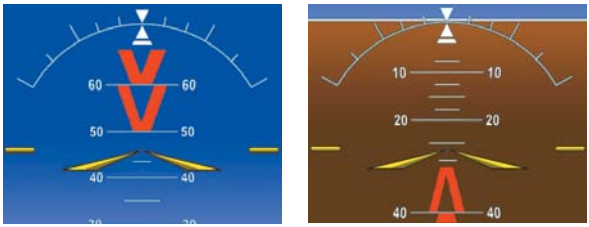

Extreme Pitch Indication

DEAD RECKONING

While in Enroute or Oceanic phase of flight, if the system detects an invalid GPS solution or is unable to calculate a GPS position, the system automatically reverts to Dead Reckoning (DR) Mode. In DR Mode, the system uses its last-known position combined with continuously updated airspeed and heading data (when available) to calculate and display the aircraft's current estimated position.

NOTE: *Dead Reckoning Mode only functions in Enroute (ENR) or Oceanic (OCN) phase of flight. In all other phases, an invalid GPS solution produces a "NO GPS POSITION" annunciation on the map and the system stops navigating in GPS Mode.*

DR Mode is indicated by the appearance of the letters 'DR' superimposed in yellow over the 'own aircraft' symbol as shown in the following figure. In addition, 'DR' is

prominently displayed, also in yellow, on the HSI slightly above and to the right of the aircraft symbol on the CDI as shown in the following figure. Also, the CDI deviation bar is removed from the display. Lastly, but at the same time, a 'GPS NAV LOST' alert message appears on the PFD.

Normal navigation using GPS/SBAS source data resumes automatically once a valid GPS solution is restored.

It is important to note that estimated navigation data supplied by the system in DR Mode may become increasingly unreliable and must not be used as a sole means of navigation. If, while in DR Mode, airspeed and/or heading data is also lost or not available, the DR function may not be capable of estimating your position and, consequently, the system may display a path that is different than the actual movement of the aircraft. Estimated position information displayed by the system through DR while there is no heading and/or airspeed data available should not be used for navigation.

DR Mode is inherently less accurate than the standard GPS/SBAS Mode due to the lack of satellite measurements needed to determine a position. Changes in wind speed and/or wind direction compounds the relative inaccuracy of DR Mode. Because of this degraded accuracy, the crew must maintain position awareness using other navigation equipment until GPS-derived position data is restored.

CDI 'DR' Indication on PFD

Symbolic Aircraft (Map pages and Inset Map)

Dead Reckoning Indications

As a result of operating in DR Mode, all GPS-derived data is computed based upon an estimated position and is displayed as yellow text on the display to denote degraded navigation source information. This data includes the following:

- Navigation Status Box fields except Active Leg, TAS, and DTK
- GPS Bearing Pointer
- Wind data and pointers in the Wind Data Box on the PFD
- Current Track Indicator
- All Bearing Pointer Distances
- Active Flight Plan distances, bearings, and ETE values

Also, while the system is in DR Mode, the autopilot will not couple to GPS, and TAWS is disabled. Additionally, the accuracy of all nearest information (airports, airspaces, and waypoints) is questionable. Finally, airspace alerts continue to function, but with degraded accuracy.

Blank Page

ANNUNCIATIONS & ALERTS

CAS MESSAGES

Warning Messages

See the Airplane Flight Manual (AFM) for recommended pilot actions. Accompanied by a triple chime tone which repeats until acknowledged.

Message	Description
BAG SMK	Smoke detected in baggage compartment
CAB ALTITUDE HI	Cabin altitude pressure altitude high
DOOR EMER OPEN	Emergency door open
DOOR PAX OPEN	Passenger door open
E1 FIRE	Fire in engine 1
E2 FIRE	Fire in engine 2
E1 OIL LO PRES	Low oil pressure in engine 1
E2 OIL LO PRES	Low oil pressure in engine 2
ELEC EMERGENCY	Generators offline
ELEC XFR FAIL	Generators offline and electrical emergency transfer has failed
LG LEVER DISAG	Landing gear position and control lever disagreement
NO TO CONFIG	No takeoff configuration

Caution Messages

See the Airplane Flight Manual (AFM) for recommended pilot actions. Accompanied by a single chime tone which repeats until acknowledged.

Message	Description
ADS 1 FAIL	ADS 1 offline or failed
ADS 2 FAIL	ADS 2 offline or failed
ADS 1 HTR FAIL	Pitot heater 1 offline or heater element failed
ADS 2 HTR FAIL	Pitot heater 2 offline or heater element failed
AHRS 1 FAIL	AHRS 1 failure
AHRS 2 FAIL	AHRS 2 failure
A-I E1 FAIL	Anti-ice system failure in engine 1
A-I E2 FAIL	Anti-ice system failure in engine 2
A-I LO CAPACITY	Not enough thermal energy available for WHSAIS (Wing and Horizontal Stabilizer Anti-ice System) operation
A-I WINGSTB FAIL	Component failure (AIV, pressure transducers, AMS Controller, other)

Message	Description
A-I WINGSTB INHB	WHSAIS switched ON outside the icing envelope. Or, aircraft is in single bleed configuration and above the 15,000 ft. icing envelope when WHSAIS is switched on.
A-I WINGSTB LEAK	Bleed hot air leakage at WHSAIS pneumatic ducting
AMS CTRL FAIL	Pneumatic sources and icing protection are not available
ANTI-SKID FAIL	Anti-skid function lost; main brake still available
AP FAIL	Loss of AP function
AP PITCH MISTRIM	Airplane mistrimmed in pitch axis when AP is engaged
AP ROLL MISTRIM	Airplane mistrimmed in roll axis when AP is engaged
AUDIO PNL 1 FAIL	Audio panel 1 is offline
AUDIO PNL 2 FAIL	Audio panel 2 is offline
AURAL WRN FAIL	Aural warning system failure due to non-communicating LRUs
AUTO PTRIM FAIL	Auto pitch trim failure; other pitch trim functions still available
BAG SMK FAIL	Baggage compartment smoke detector has failed
BATT DISCHARGE	Battery discharging under normal operation
BATT 1 OFF BUS	Battery 1 offline
BATT 2 OFF BUS	Battery 2 offline
BATT EXCEEDANCE	Battery voltage has exceeded 29 VDC
BLEED 1 FAIL	Bleed 1 system not under control.
BLEED 2 FAIL	Bleed 2 system not under control.
BLEED 1 LEAK	Bleed 1 hot air leakage at some region of the ducting
BLEED 2 LEAK	Bleed 2 hot air leakage at some region of the ducting
BLEED 1 OVERPRES	Pressure in bleed ducting is higher than an acceptable value chosen to not compromise ECS and Anti-ice components integrity
BLEED 2 OVERPRES	Pressure in bleed ducting is higher than an acceptable value chosen to not compromise ECS and Anti-ice components integrity
BRK FAIL	Main brake system lost
CAB DELTA-P FAIL	Excessive cabin pressure differential
CLUTCH PIT FAIL	Slip clutch maintenance test failed
CLUTCH ROL FAIL	Slip clutch maintenance test failed
CLUTCH YAW FAIL	Slip clutch maintenance test failed
CONFIG MDL FAIL	Master Configuration Module failed or non-communicative
DOORBAG AFT OPEN	Crew baggage door open
DOORBAG LH OPEN	Forward left-hand baggage door open
DOORBAG RH OPEN	Forward right-hand baggage door open
DUCT 1 OVERTEMP	Duct 1 temperature over specified safe value
DUCT 2 OVERTEMP	Duct 2 temperature over specified safe value
E1 CTRL FAULT	Engine 1 responds slowly or not at all to thrust commands
E2 CTRL FAULT	Engine 2 responds slowly or not at all to thrust commands

Message	Description
E1 FAIL	Uncommanded shutdown detected for engine 1
E2 FAIL	Uncommanded shutdown detected for engine 2
E1 FIRE DET FAIL	Fire detection system failure in engine 1
E2 FIRE DET FAIL	Fire detection system failure in engine 2
E1 FIREX FAIL	Fire extinguisher failure in engine 1
E2 FIREX FAIL	Fire extinguisher failure in engine 2
E1 FUEL IMP BYP	Fuel filter impending bypass condition for engine 1
E2 FUEL IMP BYP	Fuel filter impending bypass condition for engine 2
E1 TLA FAIL	Thrust Lever Angle failure for engine 1
E2 TLA FAIL	Thrust Lever Angle failure for engine 2
E1 TT0 HTR FAIL	Heater failure in engine 1
E2 TT0 HTR FAIL	Heater failure in engine 2
EBAY LEAK	Leak inside E-Bay
EBAY OVHT	Electrical bay over temperature
ECS 1 VALVE FAIL	Flow control valve monitor for ECS 1 detected improper valve operation
ECS 2 VALVE FAIL	Flow control valve monitor for ECS 2 detected improper valve operation
EMER BRK LO PRES	Few emergency brake functions available
EMER LT NOT ARM	Emergency lights switch not in ARMED position
ENG EXCEEDANCE	Limit exceeded in engine(s) during flight
ENG NO DISPATCH	FADEC detected no dispatch fault condition in engine(s)
ENG NO TO DATA	No takeoff data entered
FLAP FAIL	Loss of flaps deployment or retraction
FUEL 1 LO LEVEL	Low fuel level in tank 1
FUEL 2 LO LEVEL	Low fuel level in tank 2
FUEL 1 LO PRES	Fuel pressure low in engine 1 feed line
FUEL 2 LO PRES	Fuel pressure low in engine 2 feed line
FUEL 1 SOV FAIL	Fuel feed SOV 1 closed or unavailable
FUEL 2 SOV FAIL	Fuel feed SOV 2 closed or unavailable
FUEL IMBALANCE	Fuel is imbalanced between the tanks
FUEL XFEED FAIL	Disagreement between valve command and its feedback
GEN 1 OFF BUS	Generator 1 offline
GEN 2 OFF BUS	Generator 2 offline
GEN OVLD	Generator(s) overload
GEN START FAULT	Generator start fault
GIA 1 FAIL	Failure of GIA 1
GIA 2 FAIL	Failure of GIA 2
GIA 1 OVHT	GIA 1 over temperature
GIA 2 OVHT	GIA 2 over temperature

Message	Description
GND SPLR FAIL	Loss of ground spoilers
HYD HI TEMP	Hydraulic temperature high
HYD LO PRES	Hydraulic pressure low
HYD SOV 1 FAIL	EDP 1 Fire Shutoff valve was commanded to close, but failed to close
HYD SOV 2 FAIL	EDP 2 Fire Shutoff valve was commanded to close, but failed to close
ICE CONDITION*	Aircraft is flying in icing conditions
LG WOW SYS FAIL	Landing gear weight-on-wheels system failure
MFD CONFIG	MFD configuration error
MFD FAULT	Fault with the MFD
MFD OVHT	MFD over temperature
OXY LO PRES	Oxygen system pressure low
PARK BRK NOT REL	Parking brake not released
PAX OXY NO PRES	Cabin altitude high and passenger oxygen system pressure low
PFD 1 CONFIG	PFD 1 configuration error
PFD 2 CONFIG	PFD 2 configuration error
PFD 1 FAULT	Fault with PFD 1
PFD 2 FAULT	Fault with PFD 2
PFD 1 OVHT	PFD 1 over temperature
PFD 2 OVHT	PFD 2 over temperature
PRESN AUTO FAIL	Pressurization controller failure
PTRIM BKP FAIL	Loss of backup pitch trim actuator
PTRIM NML FAIL	Loss of normally-operating pitch trim actuator
PUSHER FAIL	Stall Warning & Protection System pusher has failed
PUSHER OFF	Stall Warning Pusher is off
RUD OVERBOOST	SLRB (Spring Loaded Rudder Booster) uncommanded actuation
STBY HTR FAIL	Failure of standby heater
SWPS FAIL	Stall Warning & Protection System inoperative
SWPS FAULT	Stall Warning & Protection System activation angles anticipated to conservative settings
SWPS UNTESTED	Stall Warning & Protection System has not been tested
TCAS FAIL*	Traffic & Collision Avoidance System failure. TCASII installations only.
WSHLD 1 HTR FAIL	Windshield 1 heater failure
WSHLD 2 HTR FAIL	Windshield 2 heater failure
YD FAIL	Loss of yaw damper function
YD MISTRIM	Airplane mistrimmed in yaw axis when YD is engaged

* Optional

Advisory Messages

See the Airplane Flight Manual (AFM) for recommended pilot actions.

Message	Description
A-I E1 FAULT	Engine 1 Anti-ice system valve failed when commanded to close
A-I E2 FAULT	Engine 2 Anti-ice system valve failed when commanded to close
A-I E1 ON	Anti-ice system on in engine 1
A-I E2 ON	Anti-ice system on in engine 2
A-I WINGSTB ARM	WINGSTAB toggle switch has been armed prior to takeoff
A-I WINGSTB ON	WHSAIS is operating
ADS 1 SLIP FAIL	ADS 1 side-slip compensation is off
ADS 2 SLIP FAIL	ADS 2 side-slip compensation is off
ADS HTR SW ON	ADS Probe switch is on
AHRS 1 FAULT	Fault with AHRS 1
AHRS 2 FAULT	Fault with AHRS 2
AMS CTRL FAULT	One pneumatic and Anti-ice controller channel is inoperative
AUDIO PNL 1 FAULT	Fault with audio panel 1
AUDIO PNL 2 FAULT	Fault with audio panel 2
AURAL WRN FAULT	Partial loss of aural warning function
AVNX FAN FAIL	Avionics fan failure
BAG SMK FAULT	Two baggage compartment smoke detectors have failed
BLEED 1 OFF	Bleed pressure regulator 1 and shut-off valve closed
BLEED 2 OFF	Bleed pressure regulator 2 and shut-off valve closed
BRK CTRL 1 FAIL*	Brake control channel #1 is not available (failed or powered off)
BRK CTRL 2 FAIL*	Brake control channel #2 is not available (failed or powered off)
BRK FAULT*	Active channel of brake control system has failure(s) which reduce safety margins without adversely affect the aircraft operation. Non-dispatchable.
CLUTCH PIT PASS	Pitch slip clutch maintenance test passed
CLUTCH PIT PROG	Pitch slip clutch maintenance test in progress
CLUTCH ROLL PASS	Roll slip clutch maintenance test passed
CLUTCH ROLL PROG	Roll slip clutch maintenance test in progress
CLUTCH YAW PASS	Yaw slip clutch maintenance test passed
CLUTCH YAW PROG	Yaw slip clutch maintenance test in progress
DC BUS 1 OFF	DC bus 1 offline
DC BUS 2 OFF	DC bus 2 offline
DOOR REFUEL OPEN	Refueling door is open
E1 CHIP DETECTED	Chip detected by engine 1 oil chip detector
E2 CHIP DETECTED	Chip detected by engine 2 oil chip detector
E1 FADEC FAULT	FADEC fault in engine 1

Message	Description
E2 FADEC FAULT	FADEC fault in engine 2
E1 OIL IMP BYP	Engine 1 oil filter impending bypass set
E2 OIL IMP BYP	Engine 2 oil filter impending bypass set
ECS 1 OFF	Flow control valve monitor detected improper valve operation
ECS 2 OFF	Flow control valve monitor detected improper valve operation
ELEC SYS FAULT	Electrical system fault
EMER BUS OFF	Emergency bus OFF
ENG FIREX DISCH	Engine fire extinguisher discharge
FLAP NOT AVAIL	Flaps not available
FUEL EQUAL	Fuel quantity asymmetry corrected; XFEED SOV is open
FUEL 1 FEED FAULT	DC pump on due to low fuel pressure
FUEL 2 FEED FAULT	DC pump on due to low fuel pressure
FUEL 1 PSW FAIL	Fuel pressure switch stuck in "high" position
FUEL 2 PSW FAIL	Fuel pressure switch stuck in "high" position
FUEL PUMP 1 FAIL	Fuel pump 1 failure
FUEL PUMP 2 FAIL	Fuel pump 2 failure
GEA 1 FAIL	Failure of GEA 1
GEA 2 FAIL	Failure of GEA 2
GEA 3 FAIL	Failure of GEA 3
GPU CONNECTED	Ground power unit connected to the aircraft
GSD 1 FAIL	GSD 1 non-communicative
GSD 2 FAIL	GSD 2 non-communicative
HSDB FAULT	An LRU has stopped communicating over an HSDB
HSDB SW REV POS	HSDB switch in reversionary position
HYD SYS FAULT	Degradation of hydraulic system available power
ICE DET FAIL*	Ice Detector failure
MFD FAN FAIL	Failure of MFD fan
OXY SW NOT AUTO	Oxygen system switch in manual mode
PFD 1 FAN FAIL	Failure of PFD 1 fan
PFD 2 FAN FAIL	Failure of PFD 2 fan
PTRIM LO RATE	Pitch trim is being actuated in low rate
PTRIM SW1 FAIL	Failure of pilot pitch trim switch
PTRIM SW2 FAIL	Failure of copilot pitch trim switch
RALT FAIL*	Radar altitude failure
RAM AIR FAIL	Ram air valve failure
RUD BOOST FAIL	Loss of SLRB (Spring Loaded Rudder Booster) force assistance in case of thrust asymmetry
SHED BUS OFF	Shed bus off

Message	Description
SPDBRK SW DISAG	Speed brake switch position disagrees with the spoiler surfaces position
SPOILER FAULT	Loss of roll spoilers and/or speed brake functions
SWPS ICE SPEED	Stall Warning System activation angles anticipated due to icing conditions
VENTRAL RUD FAIL	Ventral rudder has failed
XBLEED FAIL	Cross bleed valve has failed closed or open
XBLEED SW OFF	Cross bleed switch is in the OFF position

* Optional

COMPARATOR ANNUNCIATIONS

Note that operating the system in the vicinity of metal buildings or other metal structures can cause sensor differences that may result in nuisance miscompare annunciations during start up, shut down, or while taxiing.

Comparator Window Text	Condition
ALT MISCOMP	Difference in altitude sensors is $\geq$ 200 ft.
IAS MISCOMP	If both airspeed sensors detect < 35 knots, this is inhibited.
	If either airspeed sensor detects $\geq$ 35 knots, and the difference in sensors is > 15 kts.
	If either airspeed sensor detects $\geq$ 80 knots, and the difference in sensors is > 10 kts.
HDG MISCOMP	Difference in heading sensors is > 10 degrees.
PIT MISCOMP	Difference in pitch sensors is > 5 degrees.
ROL MISCOMP	Difference in roll sensors is > 6 degrees.
ALT NO COMP	No data from one or both altitude sensors.
IAS NO COMP	No data from one or both airspeed sensors.
HDG NO COMP	No data from one or both heading sensors.
PIT NO COMP	No data from one or both pitch sensors.
ROL NO COMP	No data from one or both roll sensors..

REVERSIONARY SENSOR ANNUNCIATIONS

Reversionary Sensor Window Text	Condition
BOTH ON ADC1	Both PFDs are displaying data from the number one Air Data Computer.
BOTH ON ADC2	Both PFDs are displaying data from the number two Air Data Computer.
BOTH ON ADCSTBY	Both PFDs are displaying data from the standby air data input.
BOTH ON AHRS1	Both PFDs are displaying data from the number one Attitude & Heading Reference System.
BOTH ON AHRS2	Both PFDs are displaying data from the number two Attitude & Heading Reference System.
BOTH ON ATTSTBY	Both PFDs are displaying data from the standby attitude and heading reference input.
BOTH ON GPS1	Both PFDs are displaying data from the number one GPS receiver.
BOTH ON GPS2	Both PFDs are displaying data from the number two GPS receiver.
USING ADC1	PFD2 is displaying data from the #1 Air Data Computer.
USING ADC2	PFD1 is displaying data from the #2 Air Data Computer.
USING ADCSTBY	PFD1 or PFD2 is displaying data from the standby air data input.
USING AHRS1	PFD2 is displaying data from the #1 AHRS.
USING AHRS2	PFD1 is displaying data from the #2 AHRS.
USING ATTSTBY	PFD1 or PFD2 is displaying data from the standby attitude and heading reference input.
USING GPS1	PFD2 is displaying data from the #1 GPS.
USING GPS2	PFD1 is displaying data from the #2 GPS.

TAWS-A ALERTS

Alert Type	PFD/MFD TAWS-A Page Annunciation	MFD Map Page Pop-Up Alert	Aural Message
Reduced Required Terrain Clearance Warning (RTC)	PULL UP	TERRAIN - PULL-UP	"Terrain, Terrain; Pull Up, Pull Up"
Imminent Terrain Impact Warning (ITI)	PULL UP	TERRAIN - PULL-UP	"Terrain, Terrain; Pull Up, Pull Up"
Reduced Required Obstacle Clearance Warning (ROC)	PULL UP	OBSTACLE - PULL-UP	"Obstacle, Obstacle; Pull Up, Pull Up"
Imminent Obstacle Impact Warning (IOI)	PULL UP	OBSTACLE - PULL-UP	"Obstacle, Obstacle; Pull Up, Pull Up"
Excessive Descent Rate Warning (EDR)	PULL UP	PULL-UP	"<whoop><whoop> Pull Up"
Excessive Closure Rate Warning (ECR)	PULL UP	PULL-UP	"<whoop><whoop> Pull Up"
Reduced Required Terrain Clearance Caution (RTC)	TERRAIN	CAUTION - TERRAIN	"Caution, Terrain; Caution, Terrain"
Imminent Terrain Impact Caution (ITI)	TERRAIN	CAUTION - TERRAIN	"Caution, Terrain; Caution, Terrain"
Reduced Required Obstacle Clearance Caution (ROC)	TERRAIN	CAUTION - OBSTACLE	"Caution, Obstacle; Caution, Obstacle"
Imminent Obstacle Impact Caution (IOI)	TERRAIN	CAUTION - OBSTACLE	"Caution, Obstacle; Caution, Obstacle"
Premature Descent Alert Caution (PDA)	TERRAIN	TOO LOW - TERRAIN	"Too Low, Terrain"
Excessive Descent Rate Caution (EDR)	TERRAIN	SINK RATE	"Sink Rate"
Excessive Closure Rate Caution (ECR)	TERRAIN	TERRAIN	"Terrain, Terrain"
Negative Climb Rate Caution (NCR)	TERRAIN	DON'T SINK	"Don't Sink"
Flight Into Terrain High Speed Caution (FIT)	TERRAIN	TOO LOW - TERRAIN	"Too Low, Terrain"
Flight Into Terrain Gear Caution (FIT)	TERRAIN	TOO LOW - GEAR	"Too Low, Gear"
Flight Into Terrain Flaps Caution (FIT)	TERRAIN	TOO LOW - FLAPS	"Too Low, Flaps"

Alert Type	PFD/MFD TAWS-A Page Annunciation	MFD Map Page Pop-Up Alert	Aural Message
Flight Into Terrain Takeoff Caution (FIT)	TERRAIN	TOO LOW – TERRAIN	"Too Low, Terrain"
Glide Slope/Glide Path Deviation Caution (GSD) (depends on approach type)	GLIDESLOPE or GLIDEPATH	GLIDESLOPE or GLIDEPATH	"Glide Slope" or "Glide Path"
Altitude Voice Callout (VCO)	None	None	"Five-Hundred" "Four-Hundred" "Three-Hundred" "Two-Hundred" "One-Hundred"

TAWS-A System Status Annunciations

Alert Type	PFD/MFD TAWS-A Page Annunciation	Additional TAWS-A Page Annunciation	Aural Message
TAWS System Fail, Terrain or Obstacle database unavailable or invalid, invalid software configuration, system audio fault	TAWS FAIL	TAWS FAIL	"TAWS System Failure"
GPWS System Fail	GPWS FAIL	None	"GPWS System Failure"
System Test in progress	TAWS TEST	TAWS TEST	None
System Test pass	None	None	"TAWS System Test OK"
MFD Terrain or Obstacle database unavailable or invalid. TAWS operating with PFD Terrain or Obstacle databases	None	TERRAIN DATABASE FAILURE	None
GPWS System Fail, Radar Altimeter invalid, Altitude or Vertical Speed unavailable	GPWS FAIL	None	"GPWS System Failure"

Alert Type	PFD/MFD TAWS-A Page Annunciation	Additional TAWS-A Page Annunciation	Aural Message
No GPS position	TAWS N/A	NO GPS POSITION	"TAWS Not Available"
Excessively degraded GPS signal, Out of database coverage area	TAWS N/A	None	"TAWS Not Available"
Out of database coverage area	TAWS N/A	None	"TAWS Not Available" "TAWS Available" when aircraft enters database coverage area.

TAWS-A Alert Availability

	TAWS-A Alert Type Available										
TAWS-A Status Annunciation Displayed	RTC	ITI	ROC	IOI	PDA	EDR	ECR	NCR	FIT	GSD	VCO
TAWS TEST	No	No	No	No	No	No	No	No	No	No	No
TAWS N/A	No	No	No	No	No	Yes	Yes	Yes	Yes	*No	**Yes
TAWS FAIL	No	No	No	No	No	Yes	Yes	Yes	Yes	Yes	**Yes
TAWS INH	No	No	No	No	No	Yes	Yes	Yes	Yes	Yes	Yes
GPWS FAIL	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	**Yes
GS INH	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes
GP INH	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes
FLAP OVR	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	#Yes	Yes	Yes

* GSD alert will be available if a valid ILS is being used for navigation, even if no valid GPS signal is being received.

** VCO alerts are not issued if both TAWS and GPWS systems have failed or are not available.

\# Only the portions of FIT Alerting based on flap position are disabled when FLAP OVR annunciation is displayed.

TAWS-B ALERTS

Alert Type	PFD/MFD TAWS-B Page Annunciation	MFD Pop-Up Alert	Aural Message
Excessive Descent Rate Warning (EDR)	PULL UP	PULL-UP	"Pull Up"
Reduced Required Terrain Clearance Warning (RTC)	PULL UP	TERRAIN - PULL-UP	"Terrain, Terrain; Pull Up, Pull Up"
Imminent Terrain Impact Warning (ITI)	PULL UP	TERRAIN - PULL-UP	"Terrain, Terrain; Pull Up, Pull Up"
Reduced Required Obstacle Clearance Warning (ROC)	PULL UP	OBSTACLE - PULL-UP	"Obstacle, Obstacle; Pull Up, Pull Up"
Imminent Obstacle Impact Warning (IOI)	PULL UP	OBSTACLE - PULL-UP	""Obstacle, Obstacle; Pull Up, Pull Up"
Reduced Required Terrain Clearance Caution (RTC)	TERRAIN	CAUTION - TERRAIN	"Caution, Terrain; Caution, Terrain"
Imminent Terrain Impact Caution (ITI)	TERRAIN	CAUTION - TERRAIN	"Caution, Terrain; Caution, Terrain"
Reduced Required Obstacle Clearance Caution (ROC)	TERRAIN	CAUTION - OBSTACLE	"Caution, Obstacle; Caution, Obstacle"
Imminent Obstacle Impact Caution (IOI)	TERRAIN	CAUTION - OBSTACLE	"Caution, Obstacle; Caution, Obstacle"
Premature Descent Alert Caution (PDA)	TERRAIN	TOO LOW - TERRAIN	"Too Low, Terrain"
Altitude Callout "500"	None	None	"Five-Hundred"
Excessive Descent Rate Caution (EDR)	TERRAIN	SINK RATE	"Sink Rate"
Negative Climb Rate Caution (NCR)	TERRAIN	DON'T SINK	"Don't Sink"

TAWS-B System Status Annunciations

Alert Type	PFD/MFD TAWS-A Page Annunciation	Additional TAWS-A Page Annunciation	Aural Message
System Test in Progress	TAWS TEST	TAWS TEST	None
System Test Pass	None	None	"TAWS System Test OK"
TAWS-B System Test Fail, Terrain or Obstacle database unavailable or invalid, invalid software configuration, system audio fault	TAWS FAIL	TAWS FAIL	"TAWS System Failure"
MFD Terrain or Obstacle database unavailable or invalid. TAWS operating with PFD Terrain or Obstacle databases	None	TERRAIN DATABASE FAILURE	None
No GPS position	TAWS N/A	NO GPS POSITION	"TAWS Not Available"
Excessively degraded GPS signal, Out of database coverage area	TAWS N/A	None	"TAWS Not Available"
Sufficient GPS signal received after loss	None	None	"TAWS Available"

TCAS II ALERTS AND ANNUNCIATIONS

Mode	PFD Mode Annunciation	MFD Traffic Map Page Mode Annunciation	Traffic Display Status Icon (Other Maps)
TCAS II Self-test Initiated (TEST)	None	**TEST** ('TEST MODE' also shown in white on top center of page)	
Traffic Advisory and Resolution Advisory (TA/RA)	None	**TA/RA**	
Traffic Advisory Only (TA ONLY)		**TA ONLY**	
TCAS II Standby (TFC STBY)		**STANDBY** (also shown in white in center of page when aircraft on ground, yellow in air)	
TCAS II Failed		**FAIL**	

** Annunciation appears white when aircraft is on the ground and yellow while in the air.*

TCAS II Modes

Traffic Map Page Annunciation	Description
NO DATA	Data is not being received from the TCAS II unit
DATA FAILED	Data is being received from the TCAS II unit, but the unit is self-reporting a failure
FAILED	Incorrect data format received from the TCAS II unit

TCAS II Failure Annunciations

Traffic Status Banner Annunciation	Description
RA OFF SCALE	A Resolution Advisory is outside the selected display range*. Annunciation is removed when traffic comes within the selected display range
TA OFF SCALE	A Traffic Advisory is outside the selected display range*. Annunciation is removed when traffic comes within the selected display range.
RA X.X ± XX ↕	System cannot determine bearing of Resolution Advisory**. Annunciation indicates distance in nm, altitude separation in hundreds of feet, and altitude trend arrow (climbing/descending).
TA X.X ± XX ↕	System cannot determine bearing of Traffic Advisory**. Annunciation indicates distance in nm, altitude separation in hundreds of feet, and altitude trend arrow (climbing/descending).
TRFC FAIL	TCAS II unit has failed (unit is self-reporting a failure or sending incorrectly formatted data)
NO TCAS DATA	Data is not being received from the TCAS II unit

**Shown as symbol on Traffic Map Page*
***Shown in center of Traffic Map Page*

TCAS II Traffic Status Annunciations

OTHER PRODIGY® AURAL ALERTS

Message	Priority	Description
"Autopilot"	Warning	Warning – Autopilot is disengaged Single alert for manual AP disengagement Continuous alert for automatic AP disengagement; cancelled with **AP DISC** Switch
"Cabin"		High cabin altitude
"Fire, Fire"		Engine fire
"Flight Director"		Flight director has reverted to pitch or roll default mode
"High Speed"		Maximum operating speed exceeded
"Landing Gear"		Gear up in landing condition
"Minimums, minimums"		The aircraft has descended below the preset barometric minimum descent altitude.
"No Takeoff Brake"		No Takeoff Configuration due to brake status
"No Takeoff Flaps"		No Takeoff Configuration due to flap status
"No Takeoff Trim"		No Takeoff Configuration due to trim status
"Stall, Stall"		Airplane in stall condition
"Timer Expired"		Countdown timer on the PFD has reached zero
"Speed Control"		CSC (if available) disengaged abnormally
"Altitude"	Advisory	Aircraft has deviated ±200 feet of the selected altitude
"Traffic"		The Traffic Information Service (TIS) has issued a Traffic Advisory alert.
"Trim Trim Trim"		Trim switch malfunction
"Vertical track"		The aircraft is one minute from Top of Descent. Issued only when vertical navigation is enabled.
"Aural Warning OK"	Status	Aural warning system test passes
"Aural Warning One Channel"		Aural warning system test detects failure in one channel
"Incoming Call		Satellite telephone is receiving a call
"SelCal"		Incoming communication through the HF radio
"Takeoff OK"		Takeoff configuration test passed
"TIS not available"		The aircraft is outside the Traffic Information Service (TIS) coverage area.

FLIGHT PLAN IMPORT/EXPORT MESSAGES

In some circumstances, some messages may appear in conjunction with others.

Flight Plan Import/Export Results	Description
'Flight plan successfully imported.'	A flight plan file stored on the SD card was successfully imported as a stored flight plan.
'File contained user waypoints only. User waypoints imported successfully. No stored flight plan data was modified.'	The file stored on the SD card did not contain a flight plan, only user waypoints. These waypoints have been saved to the system user waypoints. No flight plans stored in the system have been modified.
'No flight plan files found to import.'	The SD card contains no flight plan data.
'Flight plan import failed.'	Flight plan data was not successfully imported from the SD card.
'Flight plan partially imported.'	Some flight plan waypoints were successfully imported from the SD card, however others had errors and were not imported. A partial stored flight plan now exists in the system.
'File contained user waypoints only.'	The file stored on the SD card did not contain a flight plan, only user waypoints. One or more of these waypoints did not import successfully.
'Too many points. Flight plan truncated.'	The flight plan on the SD card contains more waypoints than the system can support. The flight plan was imported with as many waypoints as possible.
'Some waypoints not loaded. Waypoints locked.'	The flight plan on the SD card contains one or more waypoints that the system cannot find in the navigation database. The flight plan has been imported, but must be edited within the system before it can be activated for use.
'User waypoint database full. Not all loaded.'	The flight plan file on the SD card contains user waypoints. The quantity of stored user waypoints has exceeded system capacity, therefore not all the user waypoints on the SD card have been imported. Any flight plan user waypoints that were not imported are locked in the flight plan. The flight plan must be edited within the system before it can be activated for use.
'One or more user waypoints renamed.'	One or more imported user waypoints were renamed when imported due to naming conflicts with waypoints already existing in the system.
'Flight plan successfully exported.'	The stored flight plan was successfully exported to the SD card.
'Flight plan export failed.'	The stored flight plan was not successfully exported to the SD card. The SD card may not have sufficient available memory or the card may have been removed prematurely.

PILOT PROFILE IMPORT/EXPORT MESSAGES

Pilot Profile Import/Export Results	Description
'No pilot profile plan files found to import.'	Displayed if the SD card does not have one or more valid pilot profile filenames.
'Overwrite existing profile?'	Displayed if the profile name matches the name of existing profile.
'Profile name invalid. Enter a different profile name.'	Displayed if the profile name is invalid.
'All available pilot profiles in use. Delete a profile before importing another.'	Displayed if the maximum number for pilot profiles has been reached.
'Pilot profile import failed.'	Displayed if the importing operation fails for any other reason.
'Pilot profile import succeeded.'	Displayed if the importing operation succeeds.
'Overwrite existing file?'	Displayed if the filename matches the name of an existing file on the SD card.
'Pilot profile export failed.'	Displayed if the export operation fails.
'Pilot profile export succeeded.'	Displayed if the export operation succeeds.

MFD & PFD MESSAGE ADVISORIES

Message	Comments
DATA LOST – Pilot stored data was lost. Recheck settings.	The pilot profile data was lost. System reverts to default pilot profile and settings. The pilot may reconfigure the MFD & PFDs with preferred settings, if desired.
XTALK ERROR – A flight display crosstalk error has occurred.	The MFD and PFDs are not communicating with each other. The system should be serviced.
PFD1 SERVICE – PFD1 needs service. Return unit for repair.	The PFD and/or MFD self-test has detected a problem. The system should be serviced.
PFD2 SERVICE – PFD2 needs service. Return unit for repair.	
MFD1 SERVICE – MFD1 needs service. Return unit for repair.	
MANIFEST – PFD1 software mismatch, communication halted.	The PFD and/or MFD has incorrect software installed. The system should be serviced.
MANIFEST – PFD2 software mismatch, communication halted.	
MANIFEST – MFD1 software mismatch, communication halted.	
PFD1 CONFIG – PFD1 config error. Config service req'd.	The PFD configuration settings do not match backup configuration memory. The system should be serviced.
PFD2 CONFIG – PFD2 config error. Config service req'd.	
MFD1 CONFIG – MFD1 config error. Config service req'd.	The MFD configuration settings do not match backup configuration memory. The system should be serviced.
SW MISMATCH – GDU software version mismatch. Xtalk is off.	The MFD and PFDs have different software versions installed. The system should be serviced.

MFD & PFD MESSAGE ADVISORIES (CONT.)

Message	Comments
PFD1 COOLING – PFD1 has poor cooling. Reducing power usage.	The PFD and/or MFD is overheating and is reducing power consumption by dimming the display. If problem persists, the system should be serviced.
PFD2 COOLING – PFD2 has poor cooling. Reducing power usage.	
MFD1 COOLING – MFD1 has poor cooling. Reducing power usage.	
PFD1 KEYSTK – PFD1 [key name] Key is stuck.	A key is stuck on the PFD and/or MFD bezel. Attempt to free the stuck key by pressing it several times. The system should be serviced if the problem persists.
PFD2 KEYSTK – PFD2 [key name] Key is stuck.	
MFD1 KEYSTK – MFD [key name] Key is stuck.	
CNFG MODULE – PFD1 configuration module is inoperative.	The PFD1 configuration module backup memory has failed. The system should be serviced.
PFD1 VOLTAGE – PFD1 has low voltage. Reducing power usage	The PFD1 voltage is low. The system should be serviced.
PFD2 VOLTAGE – PFD2 has low voltage. Reducing power usage	The PFD2 voltage is low. The system should be serviced.
MFD1 VOLTAGE – MFD1 has low voltage. Reducing power usage	The MFD voltage is low. The system should be serviced.

DATABASE MESSAGE ADVISORIES

Message	Comments
MFD1 DB ERR – MFD1 navigation database error exists.	The MFD and/or PFD detected a failure in the navigation database. Attempt to reload the navigation database. If problem persists, the system should be serviced.
PFD1 DB ERR – PFD1 navigation database error exists.	
PFD2 DB ERR – PFD2 navigation database error exists.	

DATABASE MESSAGE ADVISORIES (CONT.)

Message	Comments
MFD1 DB ERR – MFD1 basemap database error exists.	The MFD and/or PFD detected a failure in the basemap database.
PFD1 DB ERR – PFD1 basemap database error exists.	
PFD2 DB ERR – PFD2 basemap database error exists.	
MFD1 DB ERR – MFD1 terrain database error exists.	The MFD and/or PFD detected a failure in the terrain database. Ensure that the terrain card is properly inserted in display. Replace terrain card. If problem persists, the system should be serviced.
PFD1 DB ERR – PFD1 terrain database error exists.	
PFD2 DB ERR – PFD2 terrain database error exists.	
MFD1 DB ERR – MFD1 terrain database missing.	The terrain database is present on another LRU, but is missing on the specified LRU.
PFD1 DB ERR – PFD1 terrain database missing.	
PFD2 DB ERR – PFD2 terrain database missing.	
MFD1 DB ERR – MFD1 obstacle database error exists.	The MFD and/or PFD detected a failure in the obstacle database. Ensure that the data card is properly inserted. Replace data card. If problem persists, the system should be serviced.
PFD1 DB ERR – PFD1 obstacle database error exists.	
PFD2 DB ERR – PFD2 obstacle database error exists.	
MFD1 DB ERR – MFD1 obstacle database missing.	The obstacle database is present on another LRU, but is missing on the specified LRU.
PFD1 DB ERR – PFD1 obstacle database missing.	
PFD2 DB ERR – PFD2 obstacle database missing.	

DATABASE MESSAGE ADVISORIES (CONT.)

Message	Comments
MFD1 DB ERR – MFD1 airport terrain database error exists.	The MFD and/or PFD detected a failure in the airport terrain database. Ensure that the data card is properly inserted. Replace data card. If problem persists, the system should be serviced.
PFD1 DB ERR – PFD1 airport terrain database error exists.	
PFD2 DB ERR – PFD2 airport terrain database error exists.	
MFD1 DB ERR – MFD1 airport terrain database missing.	The airport terrain database is present on another LRU, but is missing on the specified LRU.
PFD1 DB ERR – PFD1 airport terrain database missing.	
PFD2 DB ERR – PFD2 airport terrain database missing.	
MFD1 DB ERR – MFD1 Safe Taxi database error exists.	The MFD and/or PFD detected a failure in the Safe Taxi database. Ensure that the data card is properly inserted. Replace data card. If problem persists, the system should be serviced.
PFD1 DB ERR – PFD1 Safe Taxi database error exists.	
PFD2 DB ERR – PFD2 Safe Taxi database error exists.	
MFD1 DB ERR – MFD1 Chartview database error exists.	The MFD detected a failure in the ChartView database (optional feature). Ensure that the data card is properly inserted. Replace data card. If problem persists, the system should be serviced.
MFD1 DB ERR – MFD1 FliteCharts database error exists.	The MFD detected a failure in the FliteCharts database (optional feature). Ensure that the data card is properly inserted. Replace data card. If problem persists, the system should be serviced.
MFD1 DB ERR – MFD1 Airport Directory database error exists.	The MFD detected a failure in the Airport Directory database. Ensure that the data card is properly inserted. Replace data card. If problem persists, the system should be serviced.

DATABASE MESSAGE ADVISORIES (CONT.)

Message	Comments
DB MISMATCH – Navigation database mismatch. Xtalk is off.	The PFDs and MFD have different navigation database versions or types (Americas, European, etc.) installed. Crossfill is off. Install correct navigation database version or type in all displays.
DB MISMATCH – Standby Navigation database mismatch.	The PFDs and MFD have different standby navigation database versions or types (Americas, European, etc.) installed. Install correct standby navigation database version or type in all displays.
DB MISMATCH – Terrain database mismatch.	The PFDs and MFD have different terrain database versions or types installed. Install correct terrain database version or type in all displays.
DB MISMATCH – Obstacle database mismatch.	The PFDs and MFD have different obstacle database installed. Install correct obstacle database in all displays.
DB MISMATCH – Airport Terrain database mismatch.	The PFDs and MFD have different airport terrrain databases installed. Install correct airport terrain database in all displays.
NAV DB UPDATED – Active navigation database updated.	System has updated the active navigation database from the standby navigation database.
TERRAIN DSP – [PFD1, PFD2 or MFD1] Terrain awareness display unavailable.	One of the terrain, airport terrain, or obstacle databases required for TAWS in the specified PFD or MFD is missing or invalid.

GMA 1347D MESSAGE ADVISORIES

Message	Comments
GMA1 FAIL – GMA1 is inoperative.	The audio panel self-test has detected a failure. The audio panel is unavailable. The system should be serviced.
GMA2 FAIL – GMA2 is inoperative.	
GMA XTALK – GMA crosstalk error has occurred.	An error has occurred in transferring data between the two GMAs. The system should be serviced.

GMA 1347D MESSAGE ADVISORIES (CONT.)

Message	Comments
GMA1 CONFIG – GMA1 config error. Config service req'd.	The audio panel configuration settings do not match backup configuration memory. The system should be serviced.
GMA2 CONFIG – GMA2 config error. Config service req'd.	
MANIFEST – GMA1 software mismatch, communication halted.	The audio panel has incorrect software installed. The system should be serviced.
MANIFEST – GMA2 software mismatch, communication halted.	
GMA1 SERVICE – GMA1 needs service. Return unit for repair.	The audio panel self-test has detected a problem in the unit. Certain audio functions may still be available, and the audio panel may still be usable. The system should be serviced when possible.
GMA2 SERVICE – GMA2 needs service. Return unit for repair.	

GIA 63W MESSAGE ADVISORIES

Message	Comments
GIA1 CONFIG – GIA1 config error. Config service req'd.	The GIA1 and/or GIA2 configuration settings do not match backup configuration memory. The system should be serviced.
GIA2 CONFIG – GIA2 config error. Config service req'd.	
GIA1 CONFIG – GIA1 audio config error. Config service req'd.	The GIA1 and/or GIA2 have an error in the audio configuration. The system should be serviced.
GIA2 CONFIG – GIA2 audio config error. Config service req'd.	
GIA1 COOLING – GIA1 temperature too low.	The GIA1 and/or GIA2 temperature is too low to operate correctly. Allow units to warm up to operating temperature.
GIA2 COOLING – GIA2 temperature too low.	
GIA1 COOLING – GIA1 over temperature.	The GIA1 and/or GIA2 temperature is too high. If problem persists, the system should be serviced.
GIA2 COOLING – GIA2 over temperature.	

GIA 63W MESSAGE ADVISORIES (CONT.)

Message	Comments
GIA1 SERVICE – GIA1 needs service. Return the unit for repair.	The GIA1 and/or GIA2 self-test has detected a problem in the unit. The system should be serviced.
GIA2 SERVICE – GIA2 needs service. Return the unit for repair.	
HW MISMATCH – GIA hardware mismatch. GIA1 communication halted.	A GIA mismatch has been detected, where only one is SBAS capable.
HW MISMATCH – GIA hardware mismatch. GIA2 communication halted.	
MANIFEST – GIA1 software mismatch, communication halted.	The GIA1 and/or GIA 2 has incorrect software installed. The system should be serviced.
MANIFEST – GIA2 software mismatch, communication halted.	
MANIFEST – GFC software mismatch, communication halted.	Incorrect servo software is installed, or gain settings are incorrect.
COM1 TEMP – COM1 over temp. Reducing transmitter power.	The system has detected an over temperature condition in COM1 and/or COM2. The transmitter is operating at reduced power. If the problem persists, the system should be serviced.
COM2 TEMP – COM2 over temp. Reducing transmitter power.	
COM1 SERVICE – COM1 needs service. Return unit for repair.	The system has detected a failure in COM1 and/or COM2. COM1 and/or COM2 may still be usable. The system should be serviced when possible.
COM2 SERVICE – COM2 needs service. Return unit for repair.	
COM1 PTT – COM1 push-to-talk key is stuck.	The COM1 and/or COM2 external push-to-talk switch is stuck in the enable (or "pressed") position. Press the PTT switch again to cycle its operation. If the problem persists, the system should be serviced.
COM2 PTT – COM2 push-to-talk key is stuck.	
COM1 RMT XFR – COM1 remote transfer key is stuck.	The COM1 and/or COM2 transfer switch is stuck in the enabled (or "pressed") position. Press the transfer switch again to cycle its operation. If the problem persists, the system should be serviced.
COM2 RMT XFR – COM2 remote transfer key is stuck.	

GIA 63W MESSAGE ADVISORIES (CONT.)

Message	Comments
LOI – GPS integrity lost. Crosscheck with other NAVS.	GPS integrity is insufficient for the current phase of flight.
GPS NAV LOST – Loss of GPS navigation. Insufficient satellites.	Loss of GPS navigation due to insufficient satellites.
GPS NAV LOST – Loss of GPS navigation. Position error.	Loss of GPS navigation due to position error.
GPS NAV LOST – Loss of GPS navigation. GPS fail.	Loss of GPS navigation due to GPS failure.
ABORT APR – Loss of GPS navigation. Abort approach.	Abort approach due to loss of GPS navigation.
APR DWNGRADE – Approach downgraded.	Vertical guidance generated by SBAS is unavailable, use LNAV only minimums.
TRUE APR – True north approach. Change HDG reference to TRUE.	Displayed after passing the first waypoint of a true north approach when the nav angle is set to 'AUTO'.
GPS1 SERVICE – GPS1 needs service. Return unit for repair.	A failure has been detected in the GPS1 and/or GPS2 receiver. The receiver may still be available. The system should be serviced.
GPS2 SERVICE – GPS2 needs service. Return unit for repair.	
NAV1 SERVICE – NAV1 needs service. Return unit for repair.	A failure has been detected in the NAV1 and/or NAV2 receiver. The receiver may still be available. The system should be serviced.
NAV2 SERVICE – NAV2 needs service. Return unit for repair.	
NAV1 RMT XFR – NAV1 remote transfer key is stuck.	The remote NAV1 and/or NAV2 transfer switch is stuck in the enabled (or "pressed") state. Press the transfer switch again to cycle its operation. If the problem persists, the system should be serviced.
NAV2 RMT XFR – NAV2 remote transfer key is stuck.	
G/S1 FAIL – G/S1 is inoperative.	A failure has been detected in glideslope receiver 1 and/or receiver 2. The system should be serviced.
G/S2 FAIL – G/S2 is inoperative.	

GIA 63W MESSAGE ADVISORIES (CONT.)

Message	Comments
G/S1 SERVICE – G/S1 needs service. Return unit for repair.	A failure has been detected in glideslope receiver 1 and/or receiver 2. The receiver may still be available. The system should be serviced when possible.
G/S2 SERVICE – G/S2 needs service. Return unit for repair.	

GSD 41 MESSAGE ADVISORIES

Message	Comments
GSD1 CONFIG – GSD1 config error. Config service req'd.	GSD1 and the CDU have different copies of the GSD1 configuration.
GSD1 COOLING – GSD1 temperature too low.	GSD1 is reporting a low temperature condition.
GSD1 COOLING – GSD1 over temperature.	GSD1 is reporting an over-temperature condition.
GSD1 SERVICE – GSD1 needs service. Return unit for repair.	GSD1 is reporting an internal error condition. The GSD may still be usable.
MANIFEST – GSD1 software mismatch. Communication halted.	GSD1 has incorrect software installed. The system should be serviced.

GEA 71 MESSAGE ADVISORIES

Message	Comments
GEA1 CONFIG – GEA1 config error. Config service req'd.	The GEA1 configuration settings do not match those of backup configuration memory. The system should be serviced.
GEA2 CONFIG – GEA2 config error. Config service req'd.	The GEA2 configuration settings do not match those of backup configuration memory. The system should be serviced.
GEA3 CONFIG – GEA3 config error. Config service req'd.	The GEA3 configuration settings do not match those of backup configuration memory. The system should be serviced.
MANIFEST – GEA1 software mismatch, communication halted.	The #1 GEA 71 has incorrect software installed. The system should be serviced.

GEA 71 MESSAGE ADVISORIES (CONT.)

Message	Comments
MANIFEST – GEA2 software mismatch, communication halted.	The #2 GEA 71 has incorrect software installed. The system should be serviced.
MANIFEST – GEA3 software mismatch, communication halted.	The #3 GEA 71 has incorrect software installed. The system should be serviced.

GTX 33 MESSAGE ADVISORIES

Message	Comments
XPDR1 CONFIG – XPDR1 config error. Config service req'd.	The transponder configuration settings do not match those of backup configuration memory. The system should be serviced.
XPDR2 CONFIG – XPDR2 config error. Config service req'd.	The transponder configuration settings do not match those of backup configuration memory. The system should be serviced.
MANIFEST – GTX1 software mismatch, communication halted.	The transponder has incorrect software installed. The system should be serviced.
MANIFEST – GTX2 software mismatch, communication halted.	The transponder has incorrect software installed. The system should be serviced.
XPDR1 SRVC – XPDR1 needs service. Return unit for repair.	The #1 transponder should be serviced when possible.
XPDR2 SRVC – XPDR2 needs service. Return unit for repair.	The #2 transponder should be serviced when possible.
XPDR1 FAIL – XPDR1 is inoperative.	There is no communication with the #1 transponder.
XPDR2 FAIL – XPDR2 is inoperative.	There is no communication with the #2 transponder.

GRS 77 MESSAGE ADVISORIES

Message	Comments
AHRS1 TAS – AHRS1 not receiving valid airspeed.	The #1 AHRS is not receiving true airspeed from the air data computer. The AHRS relies on GPS information to augment the lack of airspeed. The system should be serviced.
AHRS2 TAS – AHRS2 not receiving valid airspeed.	The #2 AHRS is not receiving true airspeed from the air data computer. The AHRS relies on GPS information to augment the lack of airspeed. The system should be serviced.
AHRS1 GPS – AHRS1 using backup GPS source.	The #1 AHRS is using the backup GPS path. Primary GPS path has failed. The system should be serviced when possible.
AHRS2 GPS – AHRS2 using backup GPS source.	The #2 AHRS is using the backup GPS path. Primary GPS path has failed. The system should be serviced when possible.
AHRS1 GPS – AHRS1 not receiving any GPS information.	The #1 AHRS is not receiving any or any useful GPS information. Check AFMS limitations. The system should be serviced.
AHRS2 GPS – AHRS2 not receiving any GPS information.	The #2 AHRS is not receiving any or any useful GPS information. Check AFMS limitations. The system should be serviced.
AHRS1 GPS – AHRS1 not receiving backup GPS information.	The #1 AHRS is not receiving backup GPS information. The system should be serviced.
AHRS2 GPS – AHRS2 not receiving backup GPS information.	The #2 AHRS is not receiving backup GPS information. The system should be serviced.
AHRS1 GPS – AHRS1 operating exclusively in no-GPS mode.	The #1 AHRS is operating exclusively in no-GPS mode. The system should be serviced.
AHRS2 GPS – AHRS2 operating exclusively in no-GPS mode.	The #2 AHRS is operating exclusively in no-GPS mode. The system should be serviced.
AHRS MAG DB – AHRS magnetic model database version mismatch.	The #1 AHRS and #2 AHRS magnetic model database versions do not match.
AHRS1 SRVC – AHRS1 Magnetic-field model needs update.	The #1 AHRS earth magnetic field model is out of date. Update magnetic field model when practical.

GRS 77 MESSAGE ADVISORIES (CONT.)

Message	Comments
AHRS2 SRVC – AHRS2 Magnetic-field model needs update.	The #2 AHRS earth magnetic field model is out of date. Update magnetic field model when practical.
GEO LIMITS – AHRS1 too far North/South, no magnetic compass.	The aircraft is outside geographical limits for approved AHRS operation. Heading is flagged as invalid.
GEO LIMITS – AHRS2 too far North/South, no magnetic compass.	
MANIFEST – GRS1 software mismatch, communication halted.	The #1 AHRS has incorrect software installed. The system should be serviced.
MANIFEST – GRS2 software mismatch, communication halted.	The #2 AHRS has incorrect software installed. The system should be serviced.

GMU 44 MESSAGE ADVISORIES

Message	Comments
HDG FAULT – AHRS1 magnetometer fault has occurred.	A fault has occurred in the #1 GMU 44. Heading is flagged as invalid. The AHRS uses GPS for backup mode operation. The system should be serviced.
HDG FAULT – AHRS2 magnetometer fault has occurred.	A fault has occurred in the #2 GMU 44. Heading is flagged as invalid. The AHRS uses GPS for backup mode operation. The system should be serviced.
MANIFEST – GMU1 software mismatch, communication halted.	The GMU 44 has incorrect software installed. The system should be serviced.
MANIFEST – GMU2 software mismatch, communication halted.	

GSR 56 MESSAGE ADVISORIES

Message	Comments
GSR1 FAIL – GSR1 has failed.	A failure has been detected in the #1 GSR 56. The system should be serviced.
GSR2 FAIL – GSR2 has failed.	A failure has been detected in the #2 GSR 56. The system should be serviced.

GDL 59 MESSAGE ADVISORIES

Message	Comments
GDL59 CONFIG – GDL 59 config error. Config service req'd.	GDL 59 configuration settings do not match those of backup configuration memory. The system should be serviced.
GDL59 FAIL – GDL 59 has failed.	A failure has been detected in the GDL 59. The receiver is unavailable. The system should be serviced.
GDL59 SERVICE – GDL 59 needs service. Return unit for repair.	A failure has been detected in the GDL 59. The system should be serviced.
GDL59 RTR FAIL – The GDL 59 router has failed.	A failure has been detected in the GDL 59 router. The system should be serviced.
REGISTER GFDS – Data services are inoperative, register w/GFDS.	The GDL 59 is not registered with Garmin Flight Data Services, or its current registration data has failed authentication.
MANIFEST – GDL software mismatch, communication halted.	The GDL 59 has incorrect software installed. The system should be serviced.

GDL 69A MESSAGE ADVISORIES

Message	Comments
GDL69 CONFIG – GDL 69 config error. Config service req'd.	GDL 69 configuration settings do not match those of backup configuration memory. The system should be serviced.
GDL69 FAIL – GDL 69 has failed.	A failure has been detected in the GDL 69. The receiver is unavailable. The system should be serviced
MANIFEST – GDL software mismatch, communication halted.	The GDL 69 has incorrect software installed. The system should be serviced.

GWX 68 ALERT MESSAGES

Message	Comments
GWX CONFIG – GWX config error. Config service req'd.	GWX 68 configuration settings do not match those of the GDU configuration. The system should be serviced.
GWX FAIL – GWX is inoperative.	The GDU is not recieving status packet from the GWX 68 or the GWX 68 is reporting a fault. The GWX 68 radar system should be serviced.
GWX SERVICE – GWX needs service. Return unit for repair.	A failure has been detected in the GWX 68. The GWX 68 may still be usable.
MANIFEST – GWX software mismatch, communication halted.	The GWX 68 has incorrect software installed. The system should be serviced.
WX ALERT – Possible severe weather ahead.	Possible severe weather detected within +/- 10 degrees of the aircraft heading at a range of 80 to 320 nm.

GDC 74B MESSAGE ADVISORIES

Message	Comments
ADC1 ALT EC – ADC1 altitude error correction is unavailable.	GDC1 or GDC2 is reporting that the altitude error correction is unavailable.
ADC2 ALT EC – ADC2 altitude error correction is unavailable.	
ADC1 AS EC – ADC1 airspeed error correction is unavailable.	GDC1 or GDC2 is reporting that the airspeed error correction is unavailable.
ADC2 AS EC – ADC2 airspeed error correction is unavailable.	
MANIFEST – GDC1 software mismatch, communication halted.	The GDC 74B has incorrect software installed. The system should be serviced.
MANIFEST – GDC2 software mismatch, communication halted.	

GCU 477 MESSAGE ADVISORIES

Message	Comments
GCU CNFG – GCU Config error. Config service req'd.	GCU 477 configuration settings do not match those of backup configuration memory. The system should be serviced.
GCU FAIL – GCU is inoperative.	A failure has been detected in the GCU 477. The GCU 477 is unavailable.
MANIFEST – GCU software mismatch, communication halted.	The GCU 477 has incorrect software installed. The system should be serviced.
GCU KEYSTK – GCU [key name] Key is stuck.	A key is stuck on the GCU 477 bezel. Attempt to free the stuck key by pressing it several times. The system should be serviced if the problem persists.

GMC 715 MESSAGE ADVISORIES

Message	Comments
GMC CONFIG – GMC Config error. Config service req'd.	GMC 715 configuration settings do not match those of backup configuration memory. The system should be serviced.
GMC FAIL – GMC is inoperative.	A failure has been detected in the GMC 715. The GMC 715 is unavailable.
MANIFEST – GMC software mismatch. Communication halted.	The GMC 715 has incorrect software installed. The system should be serviced.
GMC KEYSTK – GMC [key name] Key is stuck.	A key is stuck on the GMC 715 bezel. Attempt to free the stuck key by pressing it several times. The system should be serviced if the problem persists.

MISCELLANEOUS MESSAGE ADVISORIES

Message	Comments
FPL WPT LOCK – Flight plan waypoint is locked.	Upon power-up, the system detects that a stored flight plan waypoint is locked. This occurs when an navigation database update eliminates an obsolete waypoint. The flight plan cannot find the specified waypoint and flags this message. This can also occur with user waypoints in a flight plan that is deleted. Remove the waypoint from the flight plan if it no longer exists in any database, Or update the waypoint name/identifier to reflect the new information.
FPL WPT MOVE – Flight plan waypoint moved.	The system has detected that a waypoint coordinate has changed due to a new navigation database update. Verify that stored flight plans contain correct waypoint locations.
TIMER EXPIRD – Timer has expired.	The system notifies the pilot that the timer has expired.
DB CHANGE – Database changed. Verify user modified procedures.	This occurs when a stored flight plan contains procedures that have been manually edited. This alert is issued only after an navigation database update. Verify that the user-modified procedures in stored flight plans are correct and up to date.
DB CHANGE – Database changed. Verify stored airways.	This occurs when a stored flight plan contains an airway that is no longer consistent with the navigation database. This alert is issued only after an navigation database update. Verify use of airways in stored flight plans and reload airways as needed.

MISCELLANEOUS MESSAGE ADVISORIES (CONT.)

Message	Comments
FPL TRUNC – Flight plan has been truncated.	This occurs when a newly installed navigation database eliminates an obsolete approach or arrival used by a stored flight plan. The obsolete procedure is removed from the flight plan. Update flight plan with current arrival or approach.
LOCKED FPL – Cannot navigate locked flight plan.	This occurs when the pilot attempts to activate a stored flight plan that contains locked waypoint. Remove locked waypoint from flight plan. Update flight plan with current waypoint.
WPT ARRIVAL – Arriving at waypoint -[xxxx]	Arriving at waypoint [xxxx], where [xxxx] is the waypoint name.
STEEP TURN – Steep turn ahead.	A steep turn is 15 seconds ahead. Prepare to turn.
INSIDE ARSPC – Inside airspace.	The aircraft is inside the airspace.
ARSPC AHEAD – Airspace ahead less than 10 minutes.	Special use airspace is ahead of aircraft. The aircraft will penetrate the airspace within 10 minutes.
ARSPC NEAR – Airspace near and ahead.	Special use airspace is near and ahead of the aircraft position.
ARSPC NEAR – Airspace near – less than 2 nm.	Special use airspace is within 2 nm of the aircraft position.
APR INACTV – Approach is not active.	The system notifies the pilot that the loaded approach is not active. Activate approach when required.
SLCT FREQ – Select appropriate frequency for approach.	The system notifies the pilot to load the approach frequency for the appropriate NAV receiver. Select the correct frequency for the approach.
SLCT NAV – Select NAV on CDI for approach.	The system notifies the pilot to set the CDI to the correct NAV receiver. Set the CDI to the correct NAV receiver.

MISCELLANEOUS MESSAGE ADVISORIES (CONT.)

Message	Comments
PTK FAIL – Parallel track unavailable: bad geometry.	Bad parallel track geometry.
PTK FAIL – Parallel track unavailable: invalid leg type.	Invalid leg type for parallel offset.
PTK FAIL – Parallel track unavailable: past IAF.	IAF waypoint for parallel offset has been passed.
UNABLE V WPT – Can't reach current vertical waypoint.	The current vertical waypoint can not be reached within the maximum flight path angle and vertical speed constraints. The system automatically transitions to the next vertical waypoint.
VNV – Unavailable. Unsupported leg type in flight plan.	The lateral flight plan contains a procedure turn, vector, or other unsupported leg type prior to the active vertical waypoint. This prevents vertical guidance to the active vertical waypoint.
VNV – Unavailable. Excessive track angle error.	The current track angle error exceeds the limit, causing the vertical deviation to go invalid.
VNV – Unavailable. Excessive crosstrack error.	The current crosstrack exceeds the limit, causing vertical deviation to go invalid.
VNV – Unavailable. Parallel course selected.	A parallel course has been selected, causing the vertical deviation to go invalid.
NON WGS84 WPT – Do not use GPS navigation to [xxxx].	The position of the selected waypoint [xxxx] is not calculated based on the WGS84 map reference datum and may be positioned in error as displayed. Do not use GPS to navigate to the selected non-WGS84 waypoint.
TRAFFIC FAIL – Traffic device has failed.	The system is no longer receiving data from the traffic system. The traffic device should be serviced.
FAILED PATH – A data path has failed.	A data path connected to the GDU, GSD 41, GDL 69A, or the GIA 63/W has failed.

MISCELLANEOUS MESSAGE ADVISORIES (CONT.)

Message	Comments
MAG VAR WARN – Large magnetic variance. Verify all course angles.	The GDU's internal model cannot determine the exact magnetic variance for geographic locations near the magnetic poles. Displayed magnetic course angles may differ from the actual magnetic heading by more than 2°.
SVS – SVS DISABLED: Out of available terrain region.	Synthetic Vision is disabled because the aircraft is not within the boundaries of the installed terrain database.
SVS – SVS DISABLED: Terrain DB resolution too low.	Synthetic Vision is disabled because a terrain database of sufficient resolution (9 arc-second or better) is not currently installed.
SCHEDULER [#] – <message>.	Message criteria entered by the user.
CHECK CRS – Database course for LOC1 / [LOC ID] is [CRS]°.	Selected course for LOC1 differs from published localizer course by more than 10 degrees.
CHECK CRS – Database course for LOC2 / [LOC ID] is [CRS]°.	Selected course for LOC2 differs from published localizer course by more than 10 degrees.
[PFD1, PFD2, or MFD1] CARD 1 REM – Card 1 was removed. Reinsert card.	The SD card was removed from the top card slot of the specified PFD or MFD. The SD card needs to be reinserted.
[PFD1, PFD2, or MFD1] CARD 2 REM – Card 2 was removed. Reinsert card.	The SD card was removed from the bottom card slot of the specified PFD or MFD. The SD card needs to be reinserted.
[PFD1, PFD2, or MFD1] CARD 1 ERR – Card 1 is invalid.	The SD card in the top card slot of the specified PFD or MFD contains invalid data.
[PFD1, PFD2, or MFD1] CARD 2 ERR – Card 2 is invalid.	The SD card in the bottom card slot of the specified PFD or MFD contains invalid data.

Blank Page

APPENDIX

PFD SOFTKEY MAP

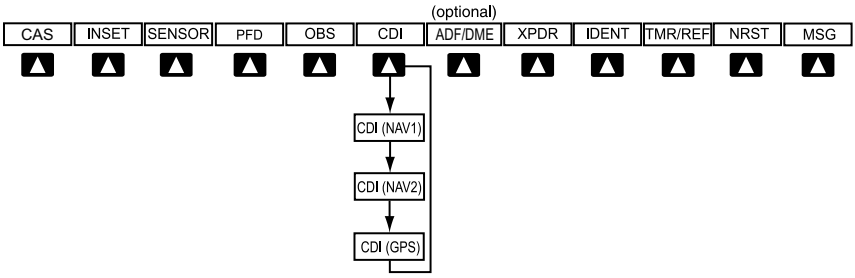

Top Level PFD Softkeys

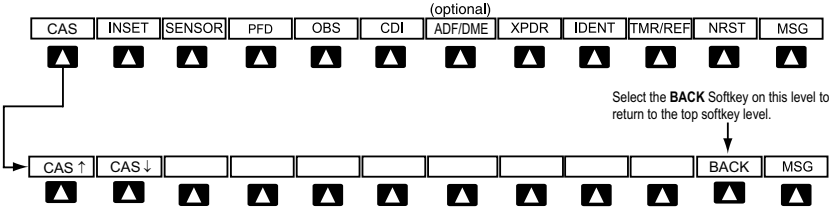

CAS Softkeys

CAS		Displays the scroll up and scroll down softkeys.
	CAS ↑	Scroll up (Displayed only when a sufficient number of items are displayed in the Crew Alerting System Display to warrant scrolling)
	CAS ↓	Scroll down (Displayed only when a sufficient number of items are displayed in the Crew Alerting System Display to warrant scrolling)

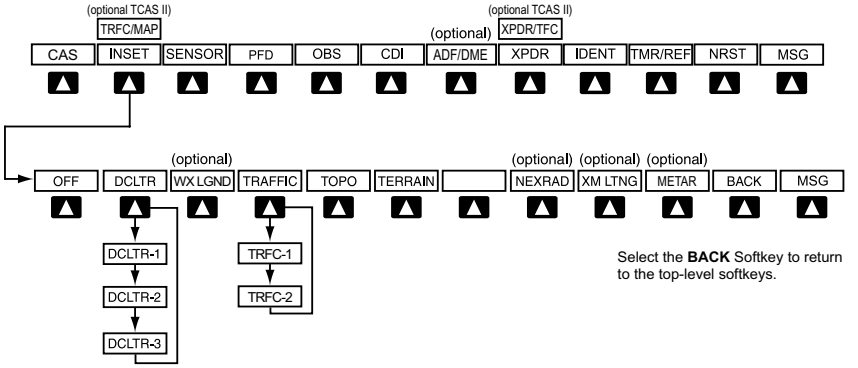

INSET Map Softkeys

INSET or TRFC/MAP		Pressing the **INSET** Softkey Displays Inset Map in the PFD lower left corner. The **TRFC/MAP** Softkey is displayed when the TCAS II option is installed. Pressing the **TRFC/MAP** Softkey displays the Inset Map showing Traffic Map Page.
	OFF	Removes Inset Map
	DCLTR (3)	Selects desired amount of map detail; cycles through declutter levels: DCLTR (No Declutter): All map features visible DCLTR-1: Declutters land data DCLTR-2: Declutters land and SUA data DCLTR-3: Removes everything except the active flight plan
	WX LGND	Displays icon and age on the Inset Map for the selected weather products (optional)
	TRAFFIC	Cycles through traffic display options: TRFC-1: Traffic displayed on inset map TRFC-2: Traffic Map Page is displayed in the inset map window
	TOPO	Displays topographical data (e.g., coastlines, terrain, rivers, lakes) and elevation scale on Inset Map
	TERRAIN	Displays terrain information on Inset Map (not available with TAWS-A)

	NEXRAD	Displays NEXRAD weather and coverage information on Inset Map (optional feature)
	XM LTNG	Displays SiriusXM Weather lightning information on Inset Map (optional feature)
	METAR	Displays METAR flags on airport symbols shown on the Inset Map

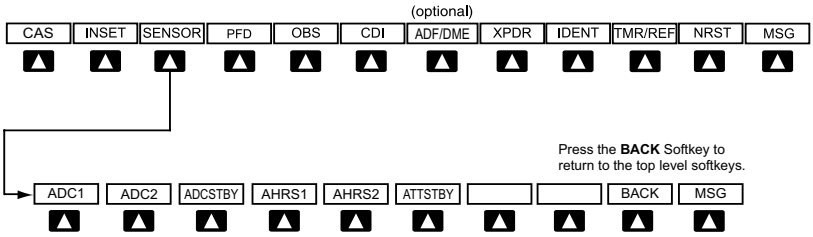

SENSOR Softkeys

SENSOR		Displays softkeys for selecting the #1 and #2 AHRS and Air Data Computers
	ADC1	Selects the #1 Air Data Computer
	ADC2	Selects the #2 Air Data Computer
	ADCSTBY	Selects standby air data input
	AHRS1	Selects the #1 AHRS
	AHRS2	Selects the #2 AHRS
	ATTSTBY	Selects standby AHRS input

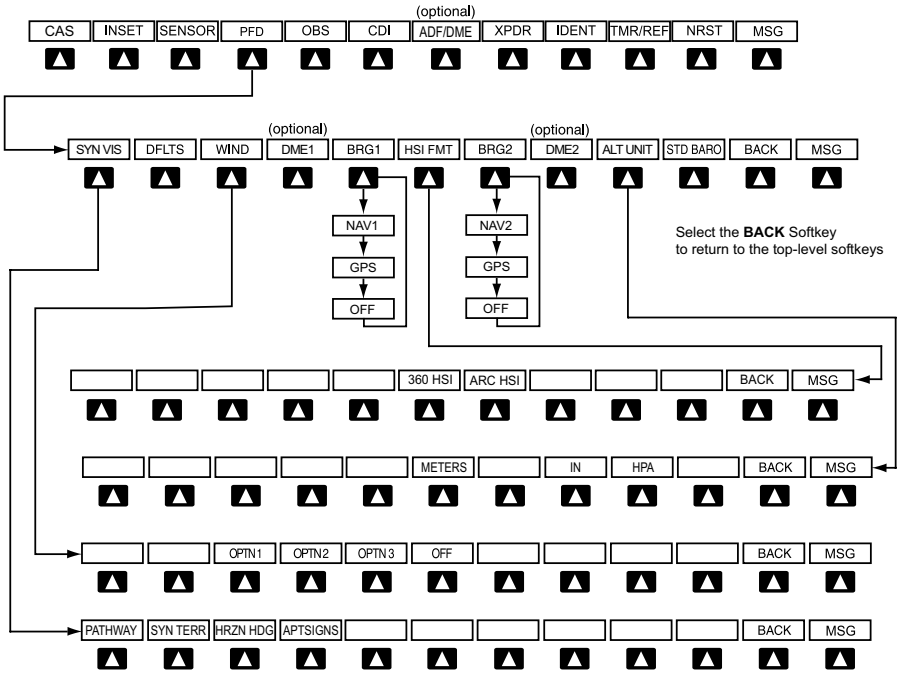

PFD Configuration Softkeys

PFD			Displays second-level softkeys for additional PFD configurations
	SYN VIS		Displays the softkeys for enabling or disabling Synthetic Vision features
		PATHWAY	Displays rectangular boxes representing the horizontal and vertical flight path of the active flight plan
		SYN TERR	Enables synthetic terrain depiction
		HRZN HDG	Displays compass heading along the Zero-Pitch line
		APTSIGNS	Displays position markers for airports within approximately 15 nm of the current aircraft position. Airport identifiers are displayed when the airport is within approximately 9 nm.

	DFLTS		Resets PFD to default settings, including changing units to standard
	WIND		Displays softkeys to select wind data parameters
		OPTN 1	Headwind/tailwind and crosswind arrows with numeric speed components
		OPTN 2	Wind direction arrow with numeric speed
		OPTN 3	Wind direction arrow with headwind/tailwind and crosswind speed components
		OFF	Information not displayed
	DME1		Select to display the DME1 information window
	BRG1		Cycles the Bearing 1 Information Window through NAV1 or GPS/waypoint identifier and GPS-derived distance information.
	HSI FRMT		Displays the HSI formatting softkeys
		360 HSI	Displays the HSI in a 360 degree format
		ARC HSI	Displays the HSI in an arc format
	BRG2		Cycles the Bearing 2 Information Window through NAV2 or GPS/waypoint identifier and GPS-derived distance information.
	DME2		Select to display the DME2 information window
	ALT UNIT		Displays softkeys for setting the altimeter and BARO settings to metric units
		METERS	When enabled, displays altimeter and selected altitude in meters
		IN	Press to display the BARO setting as inches of mercury
		HPA	Press to display the BARO setting as hectopacals

	STD BARO		Sets barometric pressure to 29.92 in Hg (1013 hPa)
OBS			Selects OBS mode on the CDI when navigating by GPS (only available with active leg)
CDI			Cycles through GPS, VOR1 (LOC1), and VOR2 (LOC2) navigation sources on the CDI
ADF/DME			Displays the ADF/DME Tuning Window, providing ADF tuning capability and allowing selection of the NAV source for tuning each DME

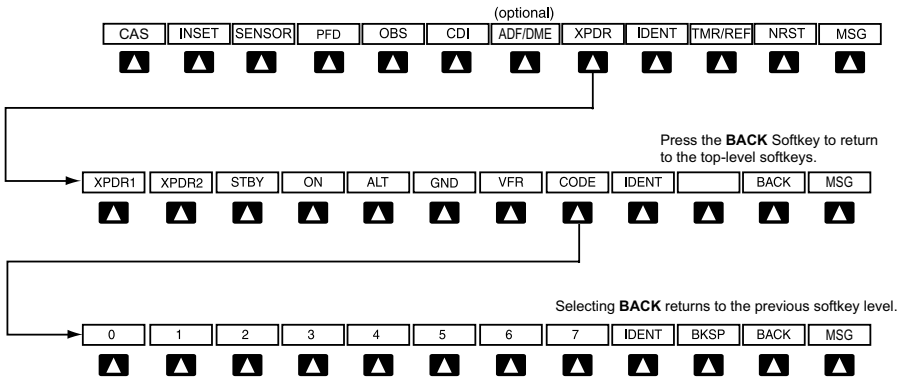

Transponder Softkeys

XPDR			Displays transponder mode selection softkeys
	XPDR1		Selects the #1 transponder as active. Not available with TCAS II option.
	XPDR2		Selects the #2 transponder as active. Not available with TCAS II option.
	STBY		Selects Standby Mode (transponder does not reply to any interrogations)
	ON		Selects Mode A (transponder replies to identification interrogations)

	ALT		Selects Mode C – Altitude Reporting Mode (transponder replies to identification and altitude interrogations)
	GND		Manually selects Ground Mode, the transponder does not allow Mode A and Mode C replies, but it does permit acquisition squitter and replies to discretely addressed Mode S interrogations. Not available with TCAS II option.
	VFR		Automatically enters the VFR code (1200 in the U.S.A. only). Not available when TCAS II option is installed.
	CODE		Displays transponder code selection soft-keys 0-7
		0 — 7	Use numbers to enter code
		BKSP	Removes numbers entered, one at a time
IDENT			Activates the Special Position Identification (SPI) pulse for 18 seconds, identifying the transponder return on the ATC screen
TMR/REF			Displays Timer/References Window
NRST			Displays Nearest Airports Window
MSG			Displays Messages Window

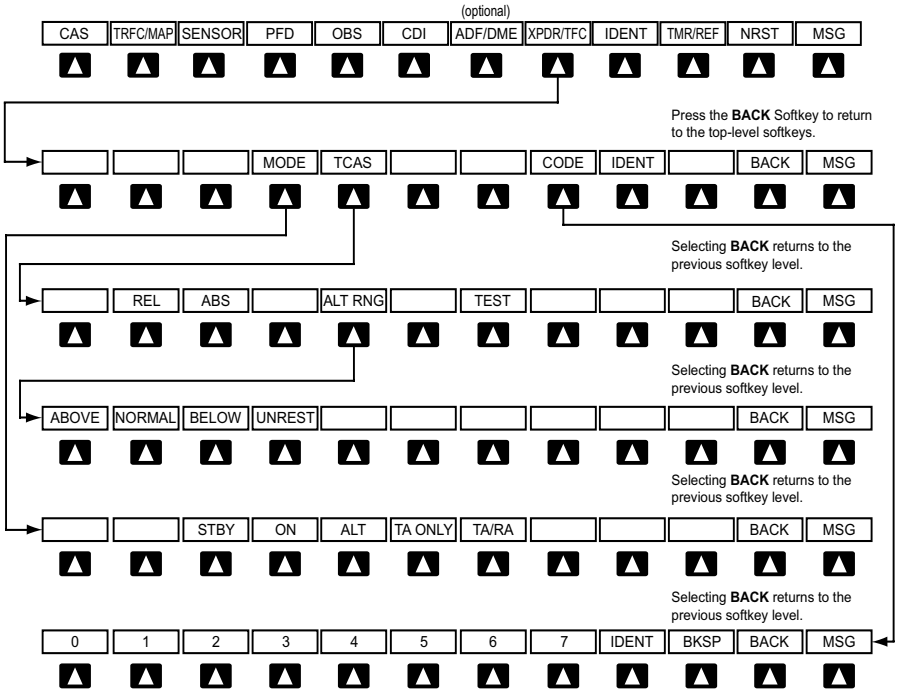

Transponder/Traffic Softkeys with TCAS II Option

XPDR/TFC				Displays the transponder and TCAS II selection softkeys
	MODE			Displays transponder mode selection softkeys
		STBY		Selects transponder Standby Mode (transponder does not reply to any interrogations). When the transponder is set to standby, the TCAS II system is also set to standby.
		ON		Activates transponder (transponder replies to identification interrogations). When the transponder is set to ON, the TCAS II system is set to standby.

		ALT		Altitude Reporting Mode (transponder replies to identification and altitude interrogations). When the transponder is set to ALT, the TCAS II system is set to standby.
		TA ONLY		Activates the TCAS II system in TA Only Mode and set the transponder to ALT
		TA/RA		Activates the TCAS II system in TA/RA Mode and sets the transponder to ALT
		BACK		Returns to the previous softkey level
	TCAS			Displays the TCAS control softkeys
		REL		Displays intruder altitude as altitude relative to own aircraft altitude
		ABS		Displays intruder MSL altitude
		ALT RNG		Displays the altitude display range softkeys
			ABOVE	Displays non-threat traffic from 9900 feet above the aircraft to 2700 feet below the aircraft. Typically used during climb phase of flight.
			NORMAL	Displays non-threat traffic from 2700 feet above the aircraft to 2700 feet below the aircraft. Typically used during enroute phase of flight.

			BELOW	Displays non-threat traffic from 2700 feet above the aircraft to 9900 feet below the aircraft. Typically used during descent phase of flight.
			UNREST	All traffic is displayed
		TEST		Activates Test Mode and displays test intruder symbols
		BACK		Returns to the previous softkey level
	CODE			Displays transponder code selection softkeys 0-7
		0 — 7		Use numbers to enter code
		IDENT		Activates the Special Position Identification (SPI) pulse for 18 seconds, identifying the transponder return on the ATC screen
		BKSP		Removes numbers entered, one at a time
IDENT				Activates the Special Position Identification (SPI) pulse for 18 seconds, identifying the transponder return on the ATC screen
TMR/REF				Displays Timer/References Window
NRST				Displays Nearest Airports Window
MSG				Displays Messages Window

MFD SOFTKEY MAP

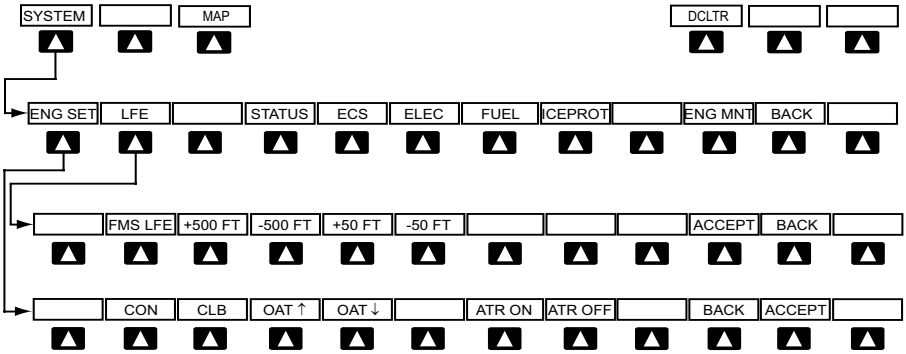

SYSTEM Softkeys

SYSTEM			Accesses EIS softkeys
	ENG SET		Accesses the FADEC settings softkeys; displays the Takeoff Data Set Window when aircraft is parked or taxiing
		CON	Selects the continuous thrust rating. Disabled when aircraft is on the ground.
		CLB	Selects the maximum climb thrust rating. Disabled when aircraft is on the ground.
		OAT ↑	Increases the takeoff outside air temperature setting in one-degree Celsius increments. Disabled when aircraft is in the air.
		OAT ↓	Decreases the takeoff outside air temperature setting in one-degree Celsius increments. Disabled when aircraft is in the air.
		ATR ON	Enables Automatic Thrust Reserve (ATR). Disabled when aircraft is in the air.
		ATR OFF	Disables Automatic Thrust Reserve (ATR). Disabled when aircraft is in the air.
		BACK	Returns display to previous softkey level
		ACCEPT	Confirms the selected takeoff settings

	LFE		Accesses softkeys for manually setting the Landing Field Elevation (LFE)
		FMS LFE	Sets current flight plan destination elevation as displayed LFE
		+500 FT	Increases currently displayed LFE value by 500 ft
		-500 FT	Decreases currently displayed LFE value by 500 ft
		+50 FT	Increases currently displayed LFE value by 50 ft
		-50 FT	Decreases currently displayed LFE value by 50 ft
		ACCEPT	Confirms the LFE setting and returns to the previous softkey level
		BACK	Returns display to previous softkey level
	STATUS		Displays the System-Status Page
	ECS		Displays the System-ECS (Environmental Control System) Page
	ELEC		Displays the System-Electrical Page
	FUEL		Displays the System-Fuel Page
	ICEPROT		Displays the System-Deice Page
	ENG MNT		Displays the Engine Maintenance Page. Enabled only while aircraft is on the ground and engines are off.
	BACK		Returns display to previous softkey level

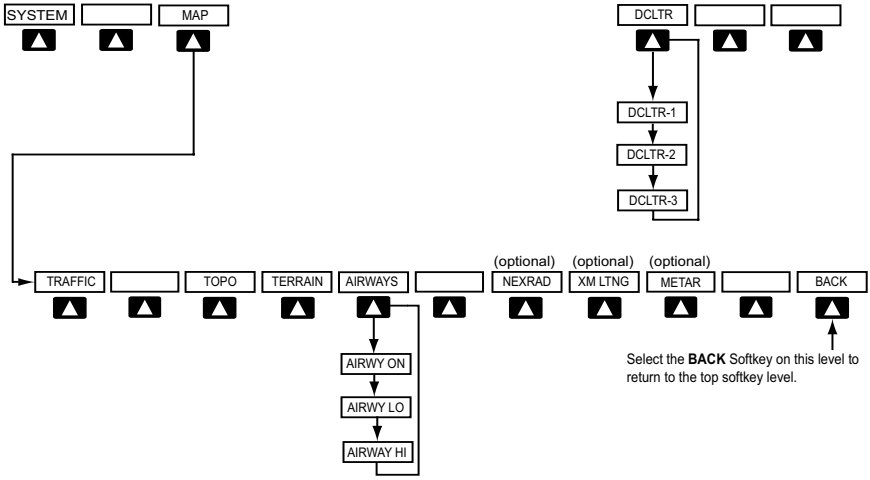

MAP Softkeys

MAP		Enables second-level Navigation Map softkeys
	TRAFFIC	Displays traffic information on Navigation Map
	TOPO	Displays topographical data (e.g., coastlines, terrain, rivers, lakes) and elevation scale on Navigation Map
	TERRAIN	Displays terrain information on Navigation Map (not available with TAWS-A)
	AIRWAYS	Displays airways on the map; cycles through the following: AIRWAYS: No airways are displayed AIRWY ON: All airways are displayed AIRWY LO: Only low altitude airways are displayed AIRWY HI: Only high altitude airways are displayed
	NEXRAD	Displays NEXRAD weather and coverage information on Navigation Map (optional feature)
	XM LTNG	Displays SiriusXM Weather lightning information on the Navigation Map (optional feature)
	METAR	Displays METAR flags on airport symbols

	BACK	Returns to top-level softkeys
DCLTR (3)		Selects desired amount of map detail; cycles through declutter levels: DCLTR (No Declutter): All map features visible DCLTR-1: Declutters land data DCLTR-2: Declutters land and SUA data DCLTR-3: Removes everything except the active flight plan

LOADING UPDATED DATABASES

CAUTION: *Never disconnect power to the system when loading a database. Power interruption during the database loading process could result in maintenance being required to reboot the system.*

NOTE: *When loading database updates, the 'DB Mismatch' message will be displayed until database synchronization is complete, followed by turning system power off, then on. Synchronization can be monitored on the AUX-SYSTEM STATUS Page.*

NOTE: *DO NOT use the database SD cards for any purpose other than database storage.*

In some cases it may be necessary to obtain an unlock code from Garmin in order to make the database product functional. It may also be necessary to have the system configured by a Garmin authorized service facility in order to use some database features.

If an error occurs during synchronization, an error message will be displayed, followed by the affected display in the Sync Status section of the Database Window. If synchronization completes on one display, but an error occurs on another, the error message will be displayed with the affected displays listed after it. When an error message is displayed, the problem must be corrected before synchronization can be completed. A power cycle is required to restart synchronization when 'Card Full' or 'Err' is shown.

Error Message	Description
Canceled	Database synchronization has been canceled by removing the bottom SD card in display being updated
Card Full	SD card does not contain sufficient memory
Err	Displayed for all other errors that may cause the synchronization process to be halted
Timeout	System timed-out prior to the database transfer completing

Loading Garmin Database Updates

1) With system power OFF, remove the MFD database card from the bottom card slot of the MFD.

2) Update the Garmin databases on the MFD card.

3) Insert the MFD database card into the bottom card slot of the MFD.

4) Apply power to the system, check that the databases are initialized and displayed on the power-up screen. When updating the terrain and FliteCharts databases, a 'Verifying' message may be seen. If this message is present, wait for the system to finish loading before proceeding to step 5.

5) Acknowledge the Power-up Page agreement by pressing the **ENT** Key or the right most softkey.

6) Turn the large **FMS** Knob to select the AUX Page group on the MFD.

7) Turn the small **FMS** Knob to select the System Status Page.

8) Monitor the Sync Status in the Database Window. Wait for all databases to complete synching, indicated by 'Complete' being displayed.

9) Remove and reapply power to the system.

10) Turn the large **FMS** Knob to select the AUX Page group on the MFD.

11) Turn the small **FMS** Knob to select the System Status Page.

12) Press the Display Database Selection Softkey to show database information for each display (**MFD1 DB**, **PFD1 DB, PFD2 DB**). Verify the correct database cycle information is shown for each database for each display.

Loading the Jeppesen Navigation Database as the Active Navigation Database

NOTE: *Loading the Jeppesen navigation database as the active database prior to its effective date will result in the expiration date on the power-up screen and the effective date on the AUX-System Status Page being displayed in yellow.*

NOTE: *After the navigation database is loaded or copied, the top SD card may be removed.*

1) With the system OFF, insert the SD card containing the new navigation database version into the top card slot of the display (PFD1, PFD2 or MFD) to be updated (label of SD card facing left).

2) Turn the system ON. A prompt is displayed in the upper left corner of the display:

3) Press the **NO** Softkey to proceed to loading the active database.

4) A prompt similar to the following is displayed. Press the **YES** Softkey to update the active navigation database.

5) After the update completes, the display starts in normal mode.

6) Turn the system OFF and remove the SD card from the top card slot.

7) Repeat steps 1 through 6 for the other displays (PFD1, PFD2 or MFD).

8) Apply power to the system and press the **ENT** Key to acknowledge the startup screen.

9) Turn the large **FMS** Knob to select the AUX Page group on the MFD.

10) Turn the small **FMS** Knob to select the System Status Page.

11) Press the Display Database Selection Softkey to show active navigation database information for each display (**MFD1 DB**, **PFD1 DB, PFD2 DB**). Verify the correct active navigation database cycle information is shown for each display.

Loading the Jeppesen Navigation Database as the Standby Navigation Database

NOTE: *After the navigation database is loaded or copied, the top SD card may be removed.*

1) With the system OFF, insert the SD card containing the new navigation database version into the top card slot of the MFD.
2) Verify that an SD card is inserted in the bottom slot of each PFD and the MFD.
3) Turn the system ON. A prompt is displayed.
4) Press the **YES** Softkey. The navigation database is copied to the SD card in the bottom card slot of the MFD.
5) After the navigation database files are copied to the bottom SD card, press any key to continue, as instructed.
6) Again, press any key to continue as instructed on the display.
7) Press the **NO** Softkey. The display now starts in normal mode. Since the database effective date is not yet valid, it should not be loaded as the active database. The display now starts in normal mode. Do not remove power while the display is starting.
8) Press the **ENT** Key to acknowledge the startup screen.
9) Turn the large **FMS** Knob to select the AUX Page group on the MFD.
10) Turn the small **FMS** Knob to select the System Status Page.
11) The new database is copied to the SD card in the bottom card slot of each PFD. Progress can be monitored in the SYNC STATUS field. When copying is finished, 'Complete' is displayed.

NOTE: *During the synchronization process, version differences between standby navigation databases will exist. This will result in the system displaying a 'DB Mismatch' alert for the standby navigation databases. This alert will remain until the next power cycle.*

12) Turn system power OFF.
13) Remove the SD card from the top card slot of the MFD.
14) Turn system power ON.
15) Press the **ENT** Key to acknowledge the startup screen.
16) Turn the large **FMS** Knob to select the AUX Page group on the MFD.
17) Turn the small **FMS** Knob to select the System Status Page.
18) Press the Display Database Selection Softkey to show standby navigation database information for each display (**MFD1 DB**, **PFD1 DB, PFD2 DB**). Verify the correct standby navigation database cycle information is shown for each display.

Loading the magnetic field variation database update:

A copy of the current magnetic field variation database (MV DB) is included with the navigation database. At startup, the system compares this version of the MV DB with that presently being used by each AHRS (GRS1 and GRS2). If the system determines the MV DB needs to be updated, a prompt is displayed on the Navigation Map Page, as shown in the following figure.

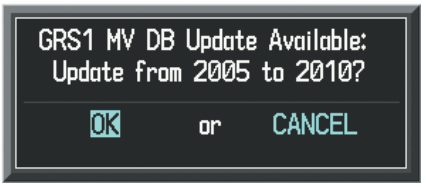

GRS1 Magnetic Field Variation Database Update Prompt

1) With 'OK' highlighted, press the **ENT** Key on the MFD. A progress monitor is displayed.

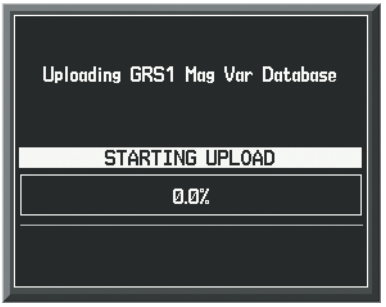

Uploading Database to GRS1

2) When the upload is complete, the prompt for the next GRS upload is displayed.

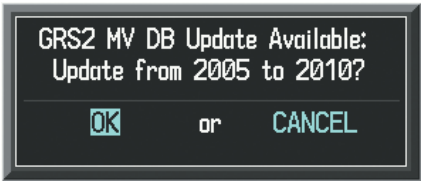

GRS2 Magnetic Field Variation Database Update Prompt

3) With 'OK' highlighted, press the **ENT** Key on the MFD. A progress monitor is displayed. When the upload is complete, the system is ready for use.

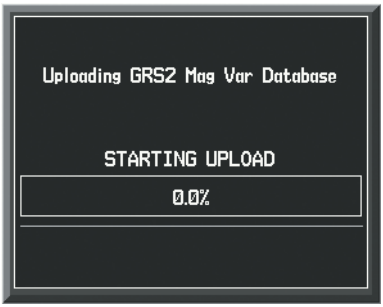

Uploading Database to GRS2

Blank Page

A

Activate a flight plan 30
Active Channel 87
Active database 156
Active Navigation Database 156
AC-U-KWIK Airport Directory 69
ADF 21, 23
Advisories, CAS 107–108
AHRS 131, 132, 135
Airport Directory 69, 124
Airport Signs 65, 66
Airways 153
Air Data Computer 110
Alerts, Aircraft 103
Alert messages 134
Altimeter setting 1
Antenna stabilization 63
Antenna tilt 61
AOPA Airport Directory 69
ATR 7, 151
Attitude & Heading Reference System 110
Audio Panel 98
Audio panel controls NAV1, NAV2 23
Aural alerts 118
Automatic Thrust Reserve 7, 151

B

Barometric Altitude Minimums 3
Barometric pressure 146
Battery indications 5
Bearing line 62, 63

C

Cautions, CAS 103–105
CDI 1, 2, 23, 137
Channel Presets 88
ChartView 67
Checklists 89–90
Code selection softkeys 22
COM 22, 23, 97
Current Speed Control (CSC) 28

D

Data reports 85
DB Mismatch 154, 157
DCLTR Softkey 67
Dead Reckoning 99
Declutter 98, 142, 154
Designated altitudes 32
Direct-to 29
DME 21, 23
DR mode 99, 100, 101

E

Edit a flight plan 44
Electrical indications 8, 14
Electronic checklists 89, 90
Emergency checklist 90
Engine failure 95
Engine fire 95
Engine rotation speeds 5
Environmental Control System (ECS) 12–13

F

Flap Indicator 5, 11, 96
Flight Director 25
Flight ID 21
Flight path marker 65
FliteCharts® 67
Frequency Transfer 23
Fuel indications 5, 8, 16

G

Gain 62

H

HF 22
Horizon heading 65
Horizontal scan 62

I

Inhibit 60
Inhibit TAWS 60
Inset Map 142, 143
Interstage Turbine Temperature (ITT) 5, 95
IOI 111, 114
Iridium 69
Iridium satellite network 71, 74, 75

J

Jeppesen 67

L

Landing gear status 5, 9
Low speed data 70

M

Map panning 52
Message advisories 121–129, 131, 132, 135–139
METAR 51
Minimum Anti-Ice N1 Bug 6
MISCOMP 109
Mode S 147
Multi Function Display (MFD) Softkeys 151

N

N1 gauge 95
N1 Transient Limit 6
NAV 23
NAV1 2, 23
NAV2 2, 23
Navigation database 31, 32, 119, 122, 125, 136
Network 83, 84
NEXRAD 51, 143, 153

O

OBS 2
Obstacles 125, 127
Oil, engine 5
Outside Air Temperature (OAT) 8
Overspeed Protection 26

P

Pathways 65, 66
PIT 109
Power-up page 89
Predefined message 77, 78
Pressure, oil 5
Pressurization 9

R

Register 70
Resolution Advisory 55, 66
Reversionary mode 97
ROC 111, 114

S

SafeTaxi® 65, 67
SBAS 26, 48, 60, 100, 127, 128
Sector scan 63
Secure Digital (SD) card 89
Sensor 110
SiriusXM 87

SiriusXM lightning 143, 153
SiriusXM Weather 51
Spoiler status 5, 9
STAB 63
Standby 61
Standby Navigation Database 156
Store Flight Plan 44
SVS 65, 139
Synchronization 155
SYNC Status 157
Synoptics 11–18
Synthetic Vision System 65
System ID 69

T

TAF 51
TAS 131
TAWS 57–60, 111, 112, 114, 115
TAWS-A 57, 58, 111, 112, 113, 115, 142, 153
TAWS-B 57, 59
TCAS II 22, 54, 55, 57, 66, 116, 117, 142, 146–149
Telephone 71
Temperature, oil 5
Terrain 57, 59, 111, 112, 125, 142, 153
Text message 76, 77, 79
Text messaging 75
Thrust rating 6
Tilt line 61
Timer 2, 136
Topographical data 142, 153
Traffic 51, 54, 56, 153
Traffic Advisory 54, 55, 118
Traffic map page 54, 56, 57
Transponder 21, 22, 146, 147, 148, 149, 150
Trim Indicator 5, 11, 97

V

Vertical speed guidance 32
VNV 29, 99, 138
Voltmeter, battery 5
Vspeed 2

W

WATCH® 63
Waypoint Selection Submenu 40
Weather Attenuated Color Highlight 63
Weather radar 61
Wi-Fi 82, 83, 84, 85
Wind data 145

X

XM Weather Data Link 51, 52

Blank Page

Garmin International, Inc.
1200 East 151st Street
Olathe, KS 66062, U.S.A.
p: 913.397.8200 f: 913.397.8282

Garmin AT, Inc.
2345 Turner Road SE
Salem, OR 97302, U.S.A.
p: 503.391.3411 f: 503.364.2138

Garmin (Europe) Ltd
Liberty House, Bulls Copse Road
Hounsdown Business Park
Southampton, SO40 9RB, U.K.
p: 44/0870.8501241 f: 44/0870.8501251

Garmin Corporation
No. 68, Jangshu 2nd Road
Shijr, Taipei County, Taiwan
p: 886/2.2642.9199 f: 886/2.2642.9099

www.garmin.com

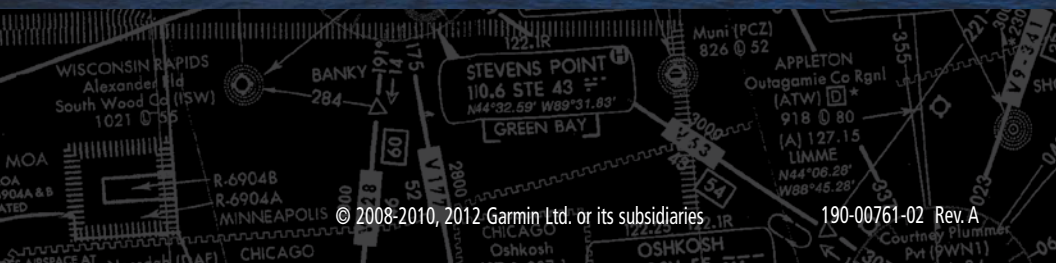

© 2008-2010, 2012 Garmin Ltd. or its subsidiaries

190-00761-02 Rev. A